

Specification

A very small sized fibre optic light source perfect for handheld application.

This unit comes in an array of monochromatic whites and an RGB option. Equipped with an RFID controller to allow the user a variety of applications.


The FP30 is ideally used for decorative purposes and small scale fibre application.

Technical Information

IP Rating	IP20
Input Voltage	12V DC
Power Consumption	3W
Control	RFID Controller
Min. Ambient Temp	-10°C
Max. Ambient Temp	40°C
Weight	0.04gs
Material/Finish	Alluminum
Dimensions	L99 x W26 x H26

Technical Data Sheet Light Sources

FP-30

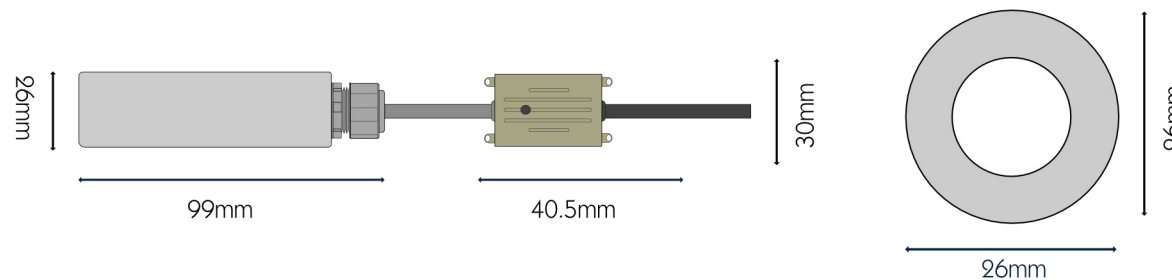

Optical Performance

Device Colour	Port Lumens*	Minimum CRI
3000K White	330lm	80
4000K White	360lm	80
5500K White	360lm	80
RGB	65/120/35lm	80

*Typical Value at 25°C ambient



Ordering Codes

Model	Device Colour	Fibre Port Size	Twinkle Wheel
FP-30	3000K	16mm	No Twinkle Wheel
	4000K		
	5500K		
	RGB		