

Specification

A large sized LED Light Source with superb lumen output.

An IP20 unit with DMX512 and 0-10V manual dimming, this is the superior light source for high output application.

Available with a Twinkle Wheel, it's the perfect component for large scale starry-sky ceilings.

A 50,000 hour life span allows it to maintain consistent light levels for multiple years.


It can also be used with pavers and underwater fixtures, if secured in an IP rated enclosure.

Technical Information

IP Rating	IP20
Input Voltage	230V AC
Power Consumption	80W
Control	DMX512 / 0-10V
Min. Ambient Temp	-10°C
Max. Ambient Temp	40°C
Weight	4.07kgs
Material/Finish	Alluminum
Dimensions	L241 x W261 x H125

Technical Data Sheet Light Sources

FP-4800

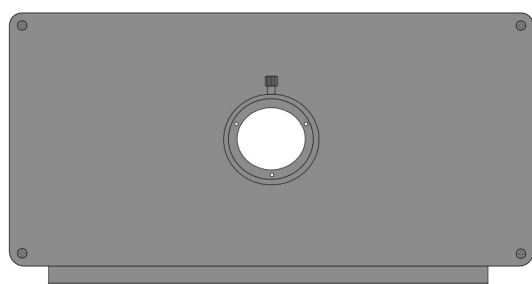

125mm

261mm

125mm



241mm



Optical Performance

Device Colour	Port Lumens*	Minimum CRI
3000K	5900lm	90
4000K	6500lm	90
5500K	5500lm	90

*Typical Value at 25 °C ambient



Ordering Codes

Model	Device Colour	Fibre Port Size	Twinkle Wheel
FP-4800	3000K	30mm	Twinkle Wheel
	4000K	33mm	No Twinkle Wheel
	5500K		