


Item #	Description	Parts #	
		910 models	T-M50 models
711	Multi communication wire	100074431	EM279
712	Left communication wire	100074418	EM261
713	Right communication wire	100074419	EM262
714	Remote controller terminal	100074428	EM273
715	Wire cramp	100074233	EM167
716	Left PCB fixing plate	100074425	EM269
717	Right PCB fixing plate	100074426	EM270
718	Transformer	100074312	EM296
719	Truss screw M4X12 Evatite	100074527	EX013
720	Ground fault circuit interrupter	100074411	EM207
721	Flat head screw M3X12	100074515	EW01A
722	Surge box	100074468	EM385
723	Surge connecting wire	100074399	EKK4U

OUTPUT TEMPERATURE CHART

Chart is based on properly sized gas line

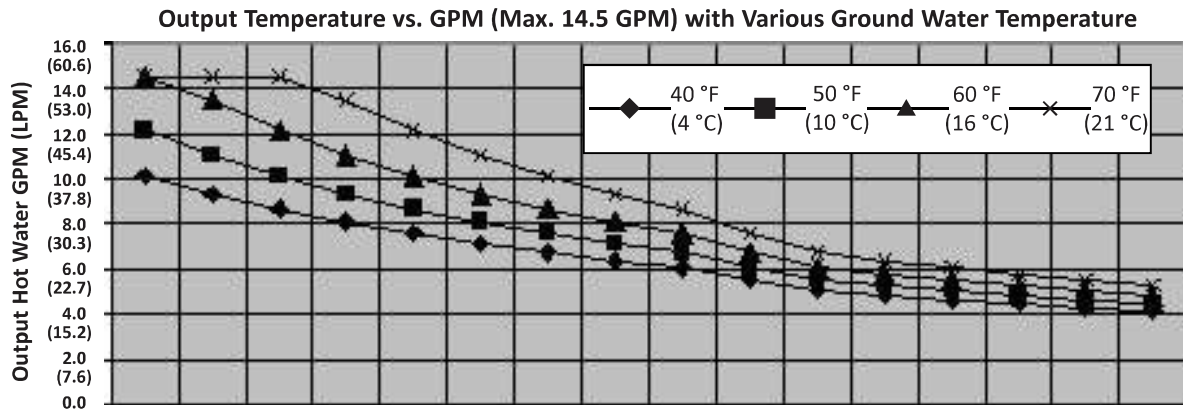

°F	100	105	110	115	120	125	130	135	140	150	160	165	170	175	180	185
GPM (40 °F)	10.1	9.3	8.7	8.1	7.6	7.1	6.7	6.4	6.1	5.5	5.1	4.9	4.7	4.5	4.3	4.2
GPM (50 °F)	12.1	11.0	10.1	9.3	8.7	8.1	7.6	7.1	6.7	6.1	5.5	5.3	5.1	4.9	4.7	4.5
GPM (60 °F)	14.5	13.5	12.1	11.0	10.1	9.3	8.7	8.1	7.6	6.7	6.1	5.8	5.5	5.3	5.1	4.9
GPM (70 °F)	14.5	14.5	14.5	13.5	12.1	11.0	10.1	9.3	8.7	7.6	6.7	6.4	6.1	5.8	5.5	5.3
°C	38	41	43	46	49	52	54	57	60	66	71	74	77	79	82	85
LPM (4 °C)	38.3	35.4	32.8	30.6	28.7	27.0	25.5	24.2	23.0	20.9	19.2	18.4	17.7	17.0	16.4	15.9
LPM (10 °C)	46.0	41.8	38.3	35.4	32.8	30.6	28.7	27.0	25.5	23.0	20.9	20.0	19.2	18.4	17.7	17.0
LPM (16 °C)	54.9	51.1	46.0	41.8	38.3	35.4	32.8	30.6	28.7	25.5	23.0	21.9	20.9	20.0	19.2	18.4
LPM (21 °C)	54.9	54.9	54.9	51.1	46.0	41.8	38.3	35.4	32.8	28.7	25.5	24.2	23.0	21.9	20.9	20.0

*When the set temperature is 150 °F (65.5 °C) or higher, maximum flow rate is limited to 10.6 GPM (40 L/min).