



10W ECO Fixed Small Downlight

Features


Economical Design
Multiple Current Settings
Class Leading Efficacy

Finish


Black/White/Custom Frame

Material

Glass Lens Cover
Aluminium Frame
PMMA Optics



- Cutout: 75mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 76mm



Technical Characteristics

Light Source

Output (W): 8.8W 200mA 36V
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 95+
Photobiological risk: RG1
Delivered Lm: 839 lm 3000K
R9 Value: 76
Delivered lm/W : 95.33lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <15


Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

LIGHT DISTRIBUTION for Medium 36°

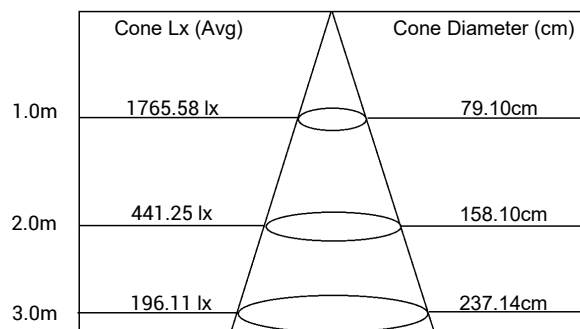

COLOUR DISTRIBUTION Nm for 3000K

