


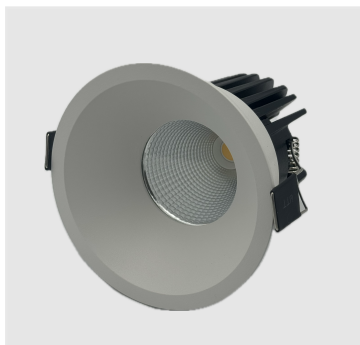

13W ECO Fixed Medium Downlight

Features

Economical Design
Multiple Current Settings
Class Leading Efficacy

Finish

Black/White/Custom Frame

Material

Glass Lens Cover
Aluminium Frame
PMMA Optics



IC-4

Technical Characteristics

Light Source


Output (W): 12.73W 300mA 36V
Total power consumption (W): 13W
Color temperature: 2700K/3000K/4000K
CRI: 95+
Photobiological risk: RG1
Delivered Lm: 1339 lm 3000K
R9 Value: 75
Delivered lm/W : 105.24lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <13

Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional


Warranty

Luminaire: 5 Years
Control Gear: 5 Years



- Cutout: 90mm
- Plaster Depth 5-25mm
- Total Depth 94mm

LIGHT DISTRIBUTION for Medium 36°

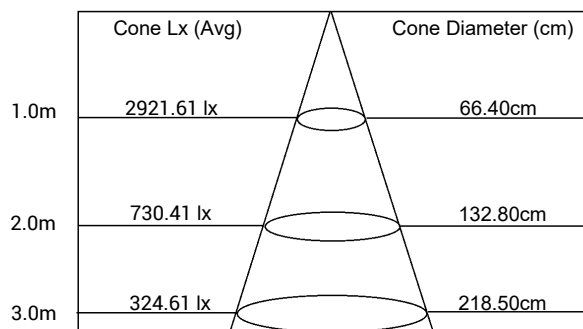

COLOUR DISTRIBUTION Nm for 4000K

