


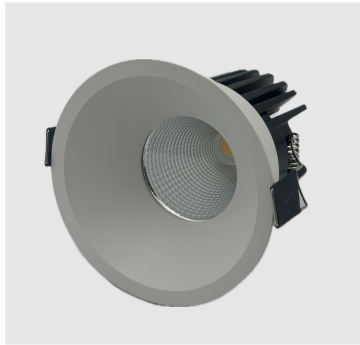

15W ECO Fixed Medium Downlight

Features



Economical Design
Multiple Current Settings
Class Leading Efficacy

Finish

Black/White/Custom Frame

Material

Glass Lens Cover
Aluminium Frame
PMMA Optics



- Cutout: 90mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 94mm

Technical Characteristics

Light Source

Output (W): 14.09W 300mA 36V
Total power consumption (W): 15W
Color temperature: 2700K/3000K/4000K
CRI: 92+
Photobiological risk: RG1
Delivered Lm: 1285 lm 4000K
R9 Value: 59
Delivered lm/W : 91.24lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <13


Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

LIGHT DISTRIBUTION for Medium 36°

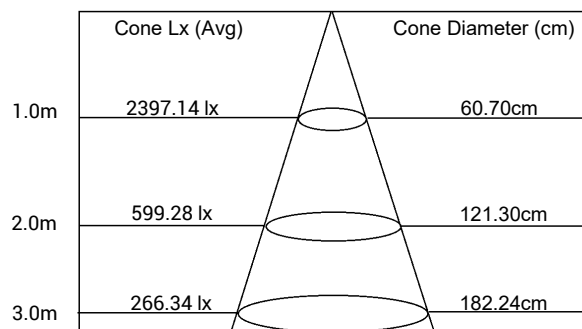

COLOUR DISTRIBUTION Nm for 4000K

