



revma

F O R L I G H T



19W ECO Fixed Large Surface Mounted Downlight

Features



Economical Design
Multiple Current Settings
Class Leading Efficacy

Finish

Black/White/Custom Frame

Material

Glass Lens Cover
Aluminium Frame
PMMA Optics



Technical Characteristics

Light Source

Output (W): 18.17W 450mA 36V
Total power consumption (W): 19W
Color temperature: 2700K/3000K/4000K
CRI: 95+
Photobiological risk: RG1
Delivered Lm: 1955 lm 4000K
R9 Value: 98
Delivered lm/W : 107.59lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: <19


Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

LIGHT DISTRIBUTION for Medium 36°

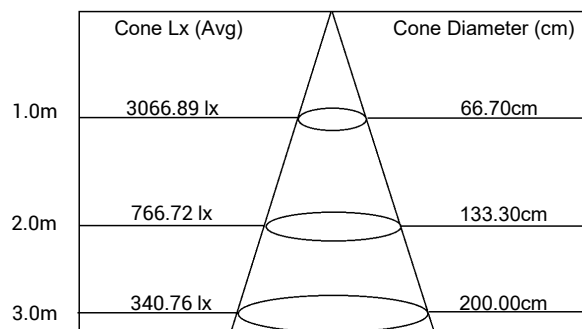

COLOUR DISTRIBUTION Nm for 4000K

