

10W ECO Adjustable Small Spotlight



Features


Compact Adjustable Design
Low Glare Lens
High Efficacy
IP20
30 Degree Tilt
355 Degree Rotation

Finish

Black/White Frame
Black/White/Gold/Custom Baffle

Material

Aluminium Frame
PMMA Optics and Baffle



Technical Characteristics

Light Source


Output (W): 9.76W 250mA 36V
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 95+
Photobiological risk: RG1
Delivered Lm: 943lm 3000K
R9 Value: 75
Delivered lm/W : 96.71lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <14

Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional


Warranty

Luminaire: 5 Years
Control Gear: 5 Years



- ◉ Cutout: 90mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 50mm

LIGHT DISTRIBUTION for Medium 36°

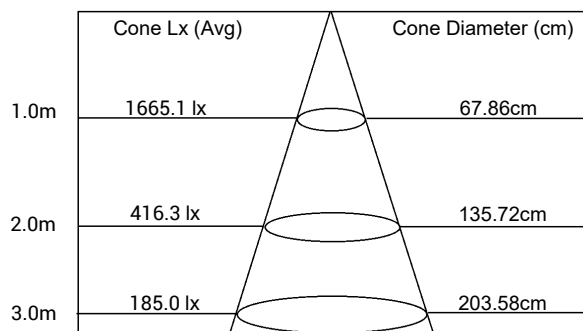

COLOUR DISTRIBUTION Nm for 3000K

