



5W Pro Fixed Downlight

Features


Adjustable Design
Low Glare Lens
Class Leading CRI
Low Blue Light Tech
Discreet Fitment

Finish

Black/White/Custom Frame

Material

Aluminium Frame
PMMA Optics and Baffle

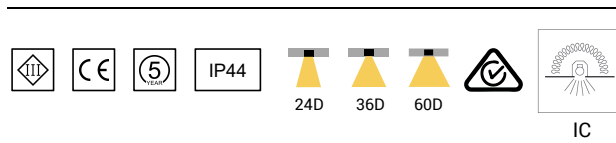

Technical Characteristics

Light Source


Output (W): 5.42W 100mA 36V
Total power consumption (W): 5W
Color temperature: 2700K/3000K/4000K
CRI: 98+
Photobiological risk: RG1
Delivered Lm: 393 lm 3000K
R9 Value: 94
Delivered lm/W : 72.51lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional


Warranty

Luminaire: 5 Years
Control Gear: 5 Years



- Cutout: 35mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 60mm

LIGHT DISTRIBUTION for Medium 36°

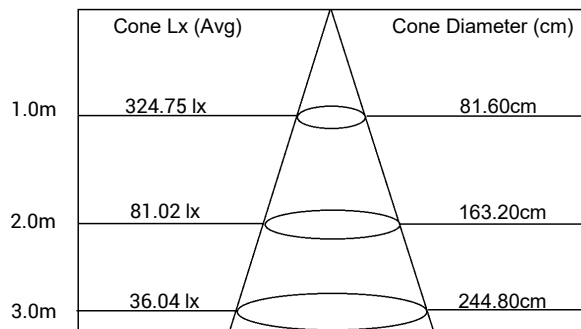

COLOUR DISTRIBUTION Nm for 3000K

