



Pro Adjustable Medium 10w

Features

Adjustable Design
Low Glare Lens
Class Leading CRI
Low Blue Light Tech
25 Degree Tilt
360 Degree Rotation

Finish

Black/White/Custom Frame

Material

Aluminium Frame
PMMA Optics and Baffle



IC

Technical Characteristics

Light Source


Output (W): 10.66W 250mA 36V
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 97+
Photobiological risk: RG1
Delivered Lm: 1066lm 3000K
R9 Value: 79
Delivered lm/W : 100.06lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <16

Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

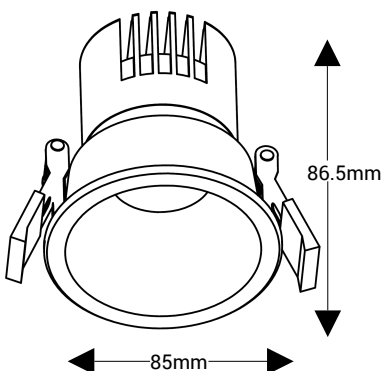

○ Cutout: 76mm
▨ Plaster Depth 5-25mm
▨ Total Depth 86.5mm

LIGHT DISTRIBUTION for Medium 36°

	Cone Lx (Avg)	Cone Diameter (cm)
1.0m	2335.81lx	71.50cm
2.0m	583.94lx	143.10cm
3.0m	259.53 lx	214.50cm

COLOUR DISTRIBUTION Nm for 3000K

