



13W Pro Adjustable Semi Recessed Spot

Features

Adjustable Design
Low Glare Lens
Class Leading CRI
Low Blue Light Tech
90 Degree Tilt
360 Degree Rotation

Finish

Black/White/Custom Frame

Material

Aluminium Frame and Baffle
PMMA Optics



IC-4

Technical Characteristics

Light Source


Output (W): 12.92W 350mA 31V
Total power consumption (W): 13W
Color temperature: 2700K/3000K/4000K
CRI: 98+
Photobiological risk: RG1
Delivered Lm: 930lm 3000K
R9 Value: 94
Delivered lm/W : 71.5lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: <14

Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional


Warranty

Luminaire: 5 Years
Control Gear: 5 Years



- Cutout: 55mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 30mm

LIGHT DISTRIBUTION for Spot 20°

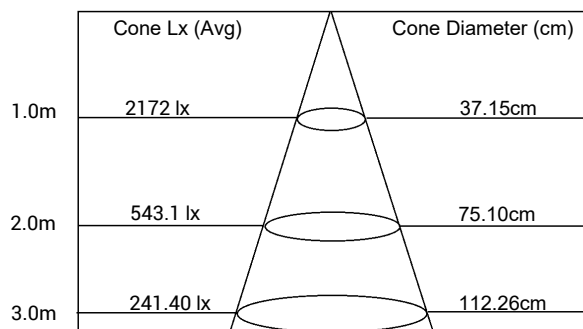

COLOUR DISTRIBUTION Nm for 3000K

