



Pro Adjustable Small 7w

Features


Adjustable Design
Low Glare Lens
Class Leading CRI
Low Blue Light Tech
25 Degree Tilt
360 Degree Rotation

Finish


Black/White/Custom Frame

Material

Aluminium Frame
PMMA Optics and Baffle



- Cutout: 56mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 74mm



Technical Characteristics

Light Source

Output (W): 6.7W 150mA 36V
Total power consumption (W): 7W
Color temperature: 2700K/3000K/4000K
CRI: 97+
Photobiological risk: RG1
Delivered Lm: 561 lm 3000K
R9 Value: 82
Delivered lm/W : 85.7lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <16


Gear

Flicker-Free Phase Cut Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

LIGHT DISTRIBUTION for Medium 36°

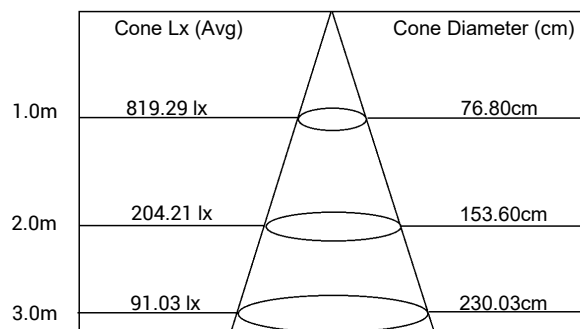

COLOUR DISTRIBUTION Nm for 3000K

