

## Pro Flat Keyslot 10w

### Features


Adjustable Design  
Low Glare Lens  
Class Leading CRI  
Low Blue Light Tech  
25 Degree Tilt

### Finish

Black/White/Custom Frame

### Material

Aluminium Frame  
PMMA Optics and Baffle



### Technical Characteristics

#### Light Source


Output (W): 10.12W 250mA 36V  
Total power consumption (W): 10W  
Color temperature: 2700K/3000K/4000K  
CRI: 98+  
Photobiological risk: RG1  
Delivered Lm: 732 lm 3000K  
R9 Value: 94  
Delivered lm/W : 73.2lm  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: <16

#### Gear

Flicker-Free Phase Cut Driver  
Flicker-Free DALI Optional  
Casambi Integral Driver Optional


#### Warranty

Luminaire: 5 Years  
Control Gear: 5 Years



- Cutout: 76mm
- ▨ Plaster Depth 5-25mm
- ▨ Total Depth 86.5mm

LIGHT DISTRIBUTION for Medium 36°

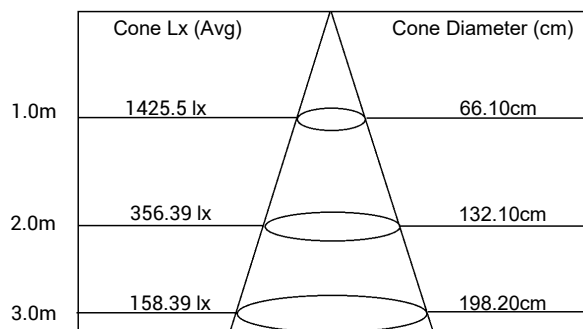

COLOUR DISTRIBUTION Nm for 3000K

