



revma

F O R L I G H T



1200 x 300 Pro Panel

Features


Backlit For Uniformity
Low Glare Microprism Diffuser
Class Leading CRI
IP65 Wipedown/Cleanroom Safe

Finish

White Frame

Material

Aluminium Frame
Polystyrene Optics

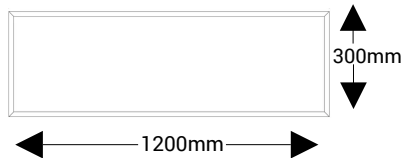

○ Cutout: 295mm x 1195mm

▨ Total Depth 30mm

Technical Characteristics

Light Source

Output (W): 39.1W 950mA 36V
Total power consumption (W): 40W
Color temperature: 3000K/4000K
CRI: 97+
Photobiological risk: RG1
Delivered Lm: 3681lm 4000K
R9 Value: 96
Delivered lm/W : 94.53lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19


Gear

Flicker-Free Non Dim IP65 Driver
Flicker-Free DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

LIGHT DISTRIBUTION

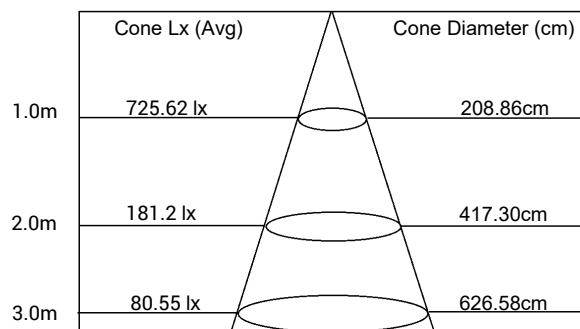

COLOUR DISTRIBUTION Nm for 4000K

