



revma

F O R L I G H T



Tubewall Up/Down

Features



Low Profile Design
Low Glare Lens
Class Leading CRI
Multiple Finish Options

Finish

Black/White/Grey/Solid 316/Solid Brass

Material

Aluminium Frame
PMMA Optics

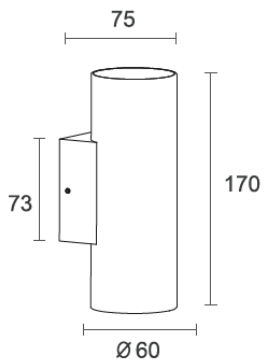

Technical Characteristics

Light Source

Output (W): 10.44W
Total power consumption (W): 10W
Color temperature: 3000K
CRI: 95+
Photobiological risk: RG1
Delivered Lm: 780lm 3000K
R9 Value: 85
Delivered lm/W : 74.7lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: <19

Gear

Phase Cut Dimmable Integral
Remote DALI Optional
Casambi Integral Driver Optional

Warranty

Luminaire: 5 Years
Control Gear: 5 Years

COLOUR DISTRIBUTION Nm for 3000K

