


# INSTRUCTION MANUAL

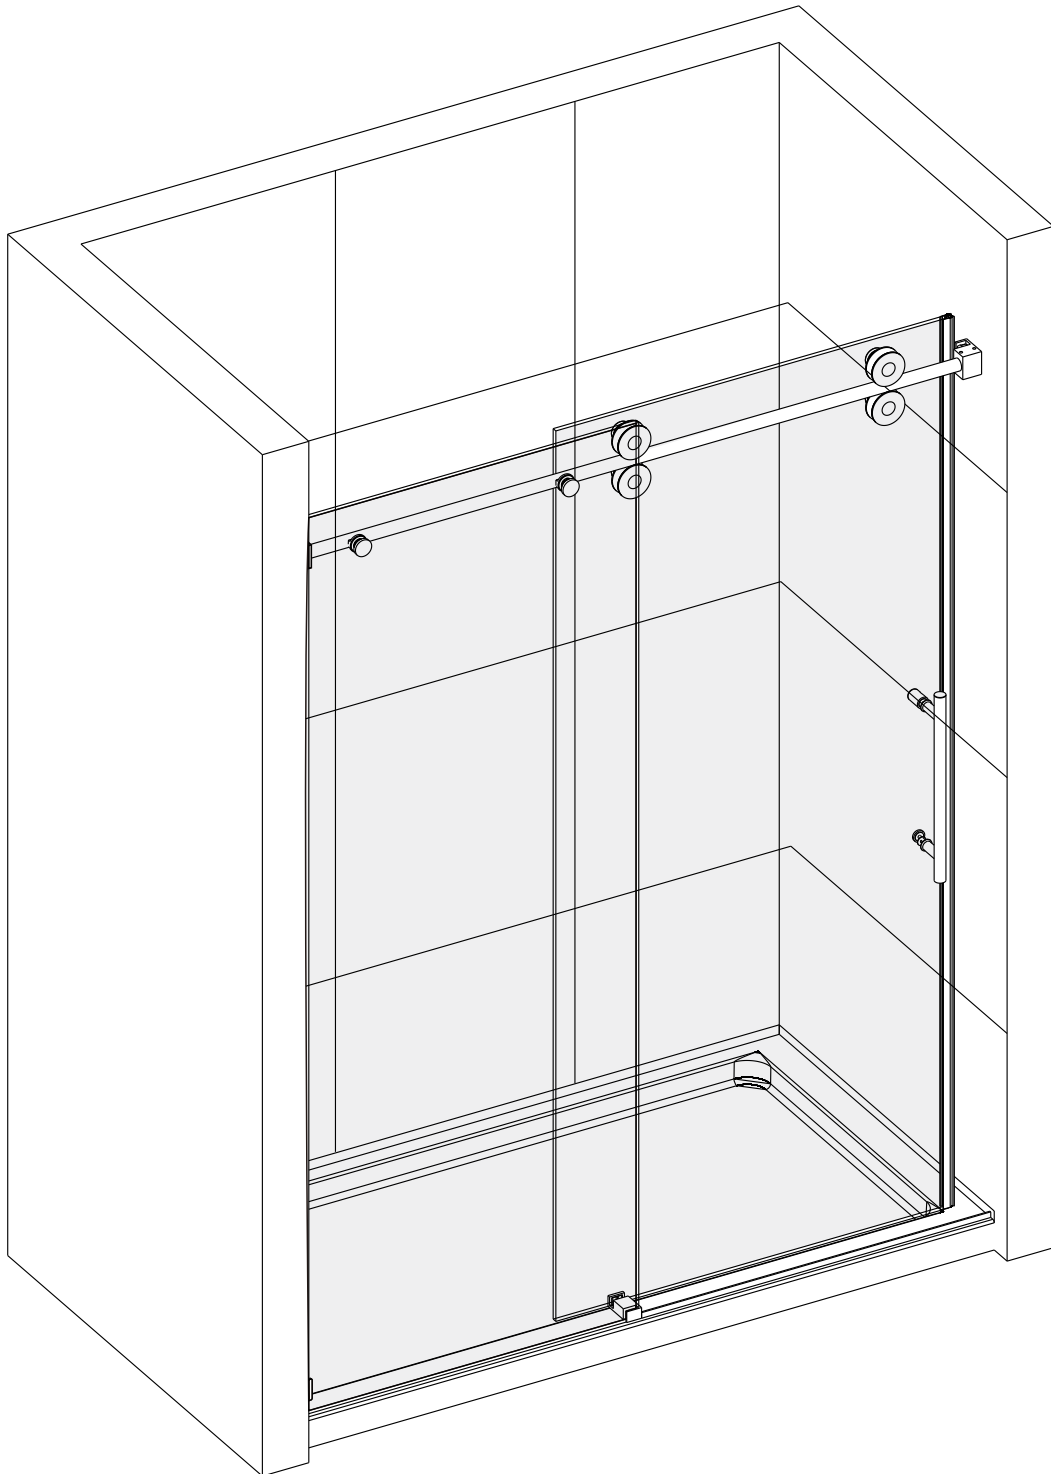

**2 PEOPLE REQUIRED**

***Please keep this manual and product code number for future reference  
and for ordering replacement parts if necessary.***

---

## **GENERAL INSTRUCTIONS**

- Read this manual carefully and completely before proceeding.
- It is recommended that you wear safety glasses at all times during the installation.

## **INSTALLATION OVER CERAMIC TILES**

- If your shower door is to be installed over ceramic tiles, the tiles should lay completely under the wall jamb.
- Silicone should be used to seal the gap where the ceramic tiles meet the fixed panel.

## **NOTICE**

- Caulking: no sealant is required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.











## **CARE FOR YOUR SHOWER DOOR**

- Never use scouring powder pads or sharp instruments on metal pieces or glass panels.

An occasional wiping down with a mild soap diluted in water is all that is needed to keep the panels and metal parts looking new.



- We recommend wiping the glass panels with a squeegee after each use.

## TOOLS REQUIRED


 <b>SPIRIT LEVEL</b>	 <b>POWER DRILL</b>	 <b>PENCIL</b>	 <b>SILICONE</b>	 <b>MALLET</b>
 <b>TAPE MEASURE</b>	 <b>SCREW DRIVER</b>	 <b>6mm&amp;3mm(1/4" &amp; 1/8") DRILL BITS</b>	 <b>HACKSAW</b>	 <b>SAFETY GLASSES</b>





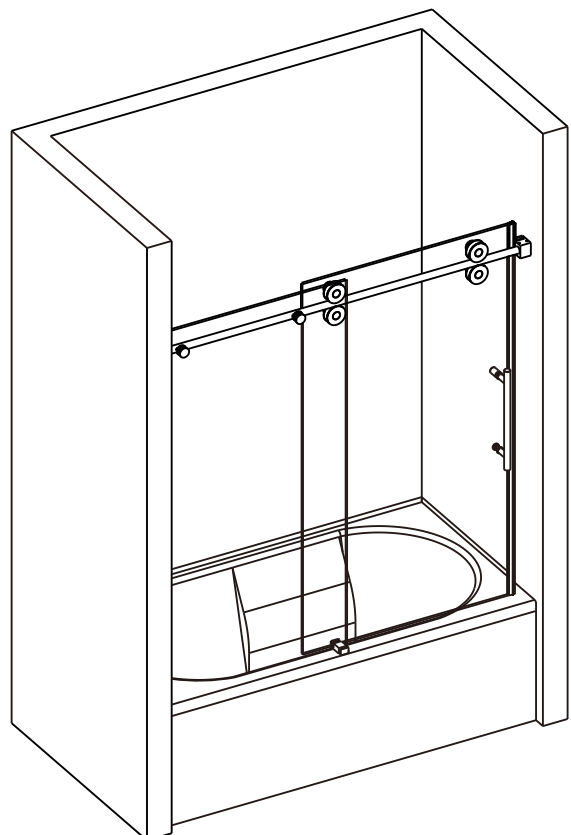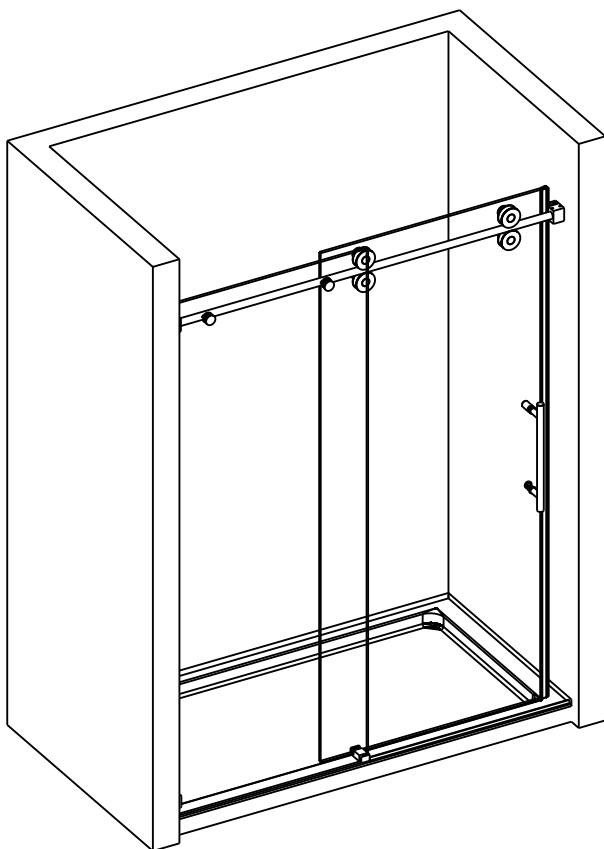

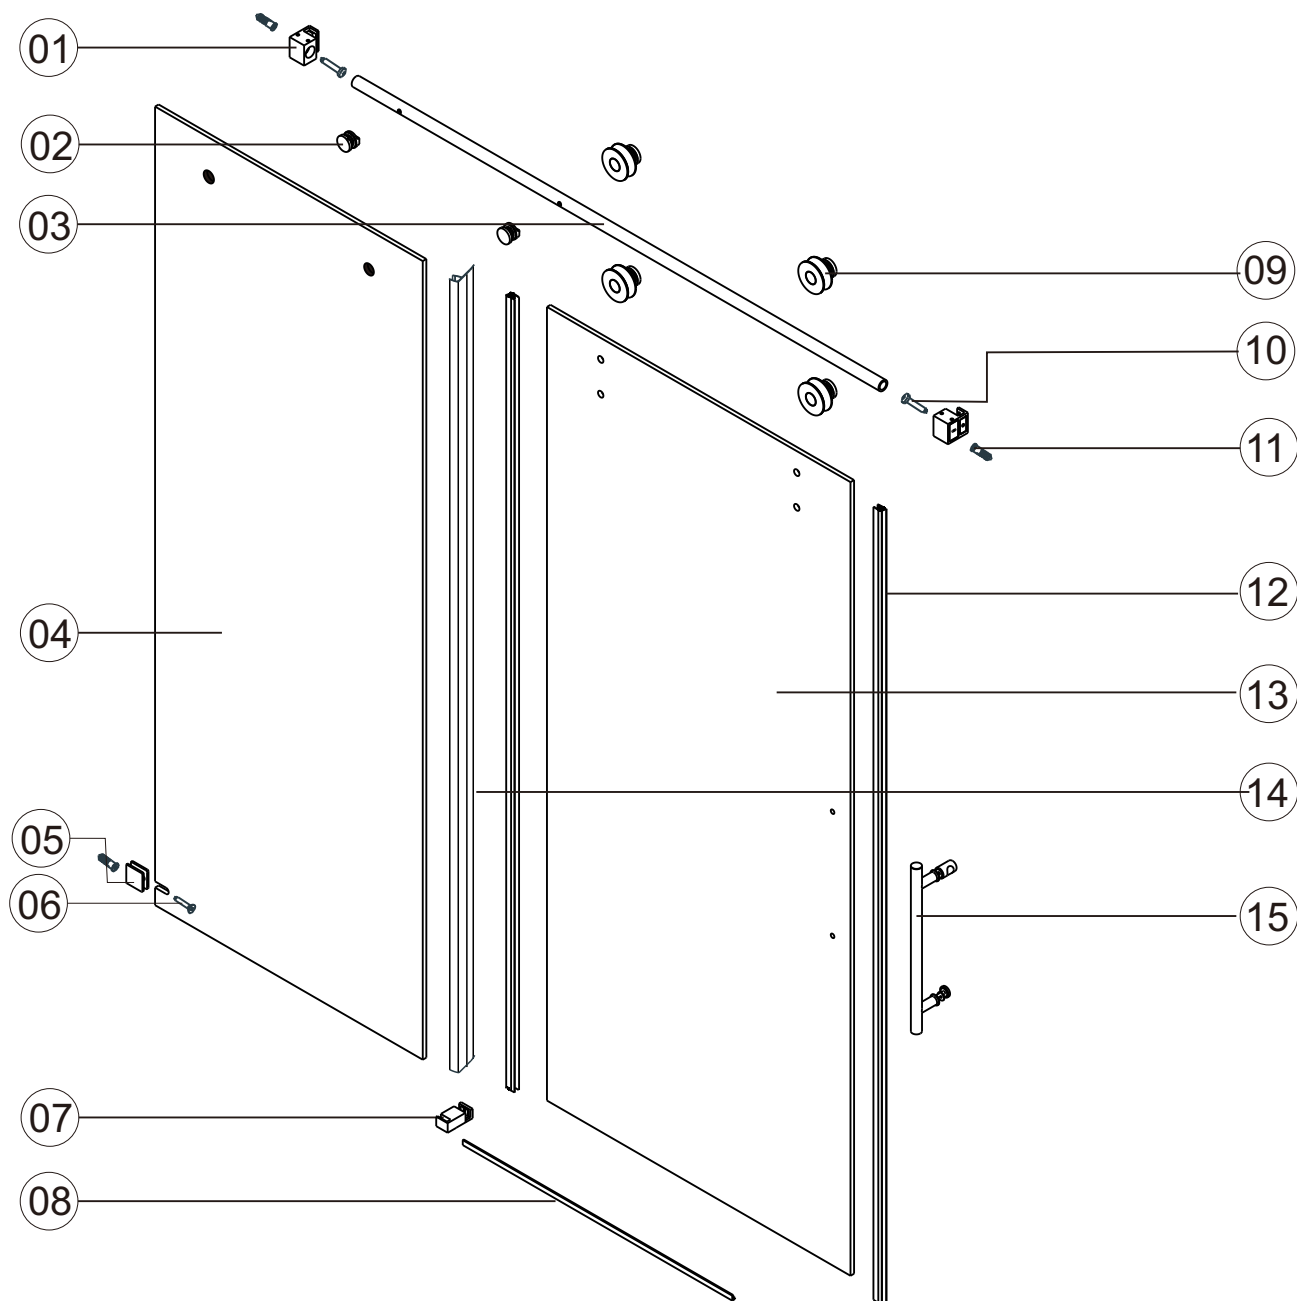

\* Use a 6mm( $\frac{1}{4}$ " ) drill bit for ceramic when drilling into ceramic tiles








## CHOOSE A CONFIGURATION






## PARTS LISTING



ITEM	PARTS	DIAGRAM	QTY
1	Guide rail bracket		2
2	Track holder for fixed panel		2
3	Rail		1
4	Fixed panel		1
5	Wall mount bracket		1
6	Screw St4x20		1
7	Floor guide		1
8	Anti-splash threshold		1


ITEM	PARTS	DIAGRAM	QTY
9	Ø55 Roller		4
10	Screw St4x30		2
11	Wall plugs Ø6		2
12	Door seal		2
13	Sliding door		1
14	Handle		1
15	Fixed panel seal		1

# 1

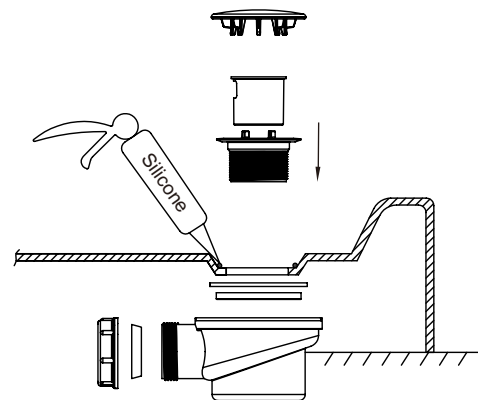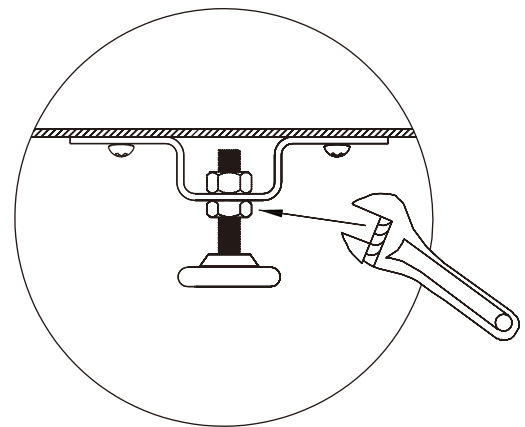
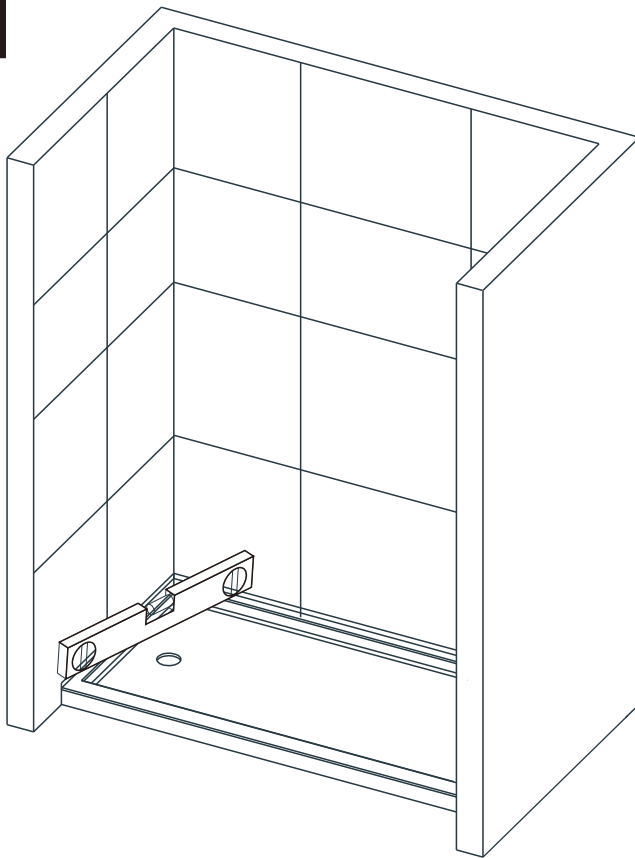


# 2


**IMPORTANT:** Please ensure the holes for the railing are levelled. If the height of A on both sides are not levelled, use the higher measurement.

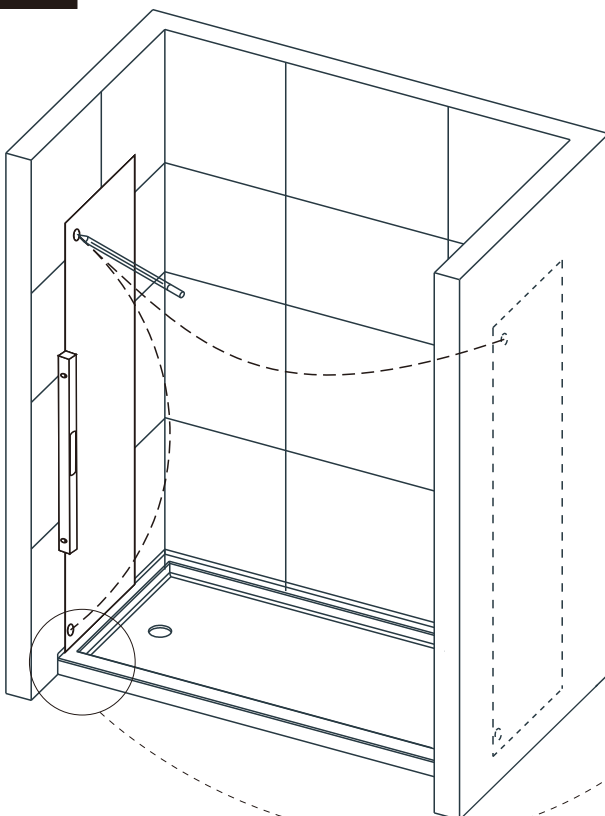


Product Height	A	B	C
60"(1524mm)	56 1/4"(1429mm)	5 7/8" (150mm)	1" (25.4mm)
66"(1676mm)	62 1/4"(1581mm)		
72"(1828mm)	68 1/4"(1733mm)		
75"(1905mm)	71 1/4"(1810mm)		
76"(1930mm)	72 1/4"(1835mm)		
78"(1981mm)	74 1/4"(1886mm)		
79"(2006mm)	75 1/4"(1911mm)		

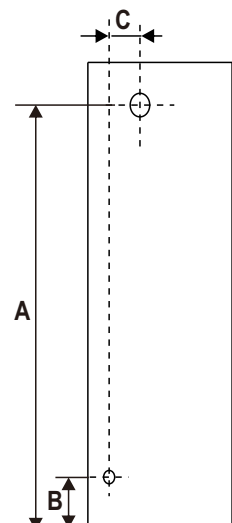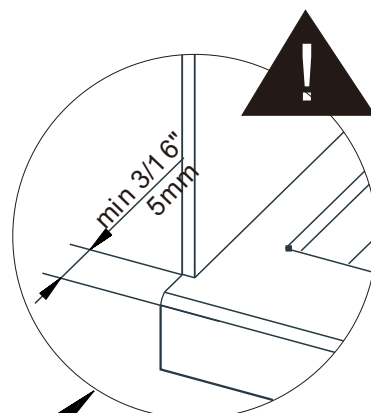


# 3

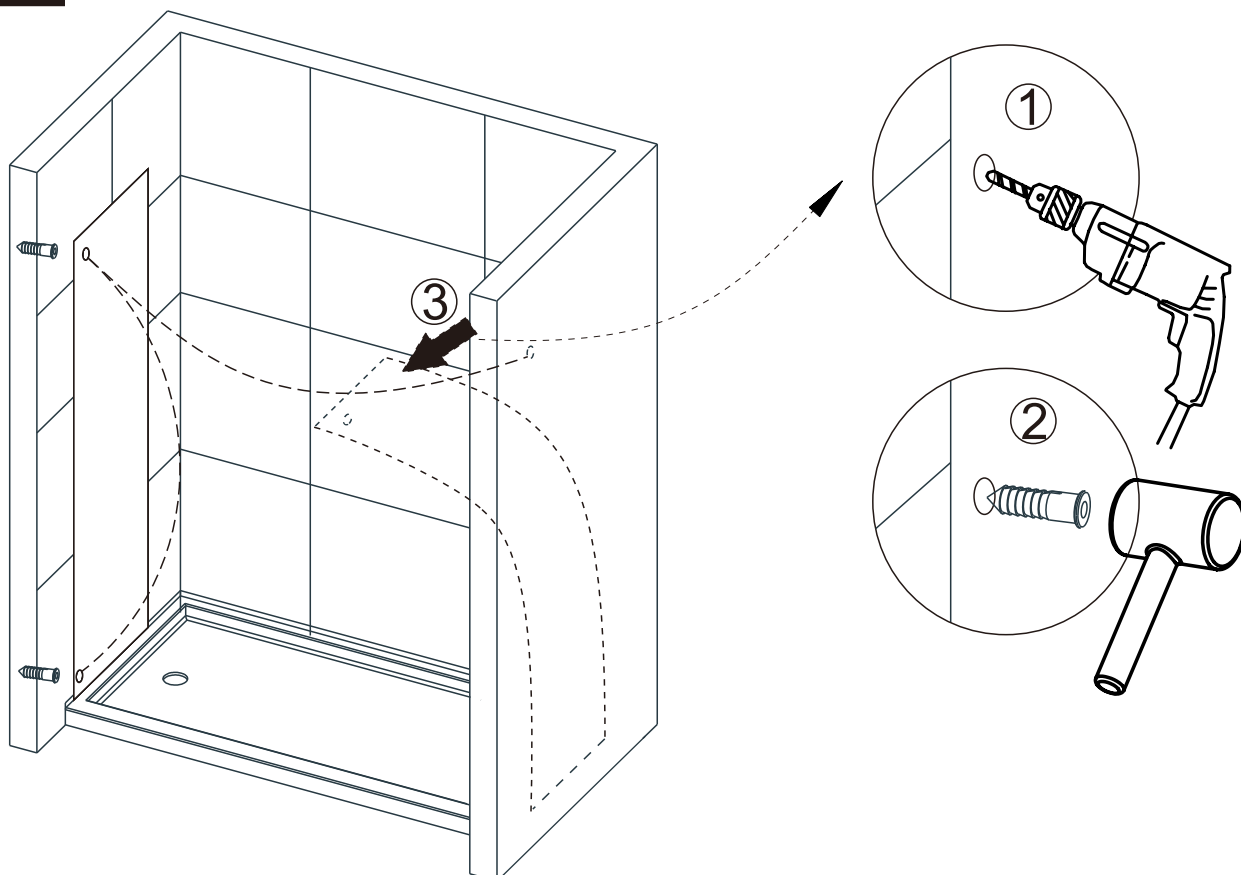


# 4

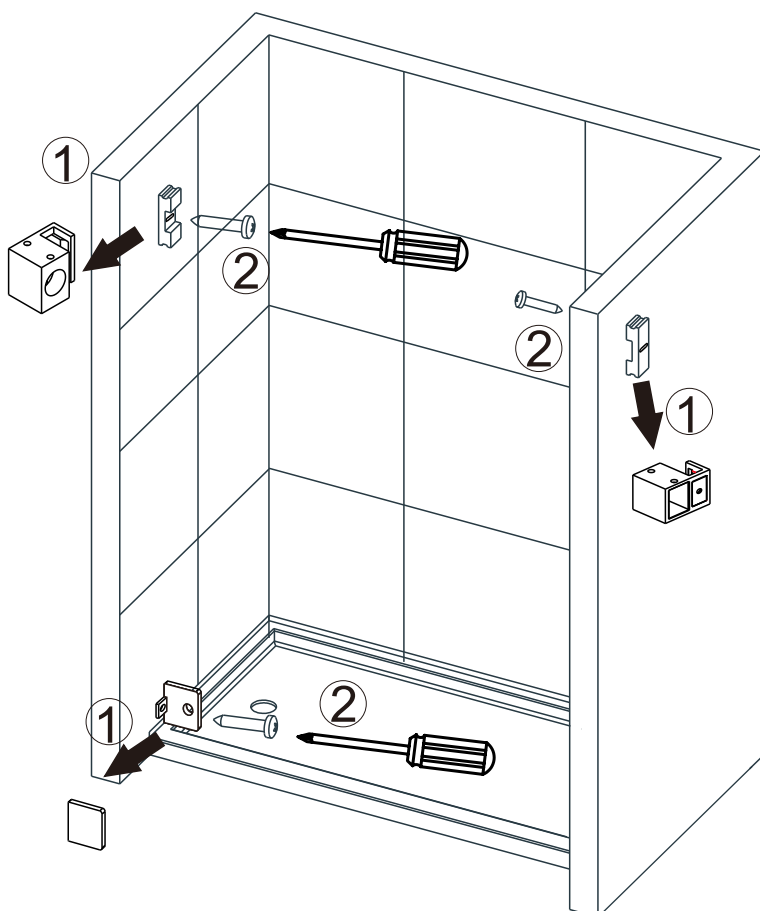


5

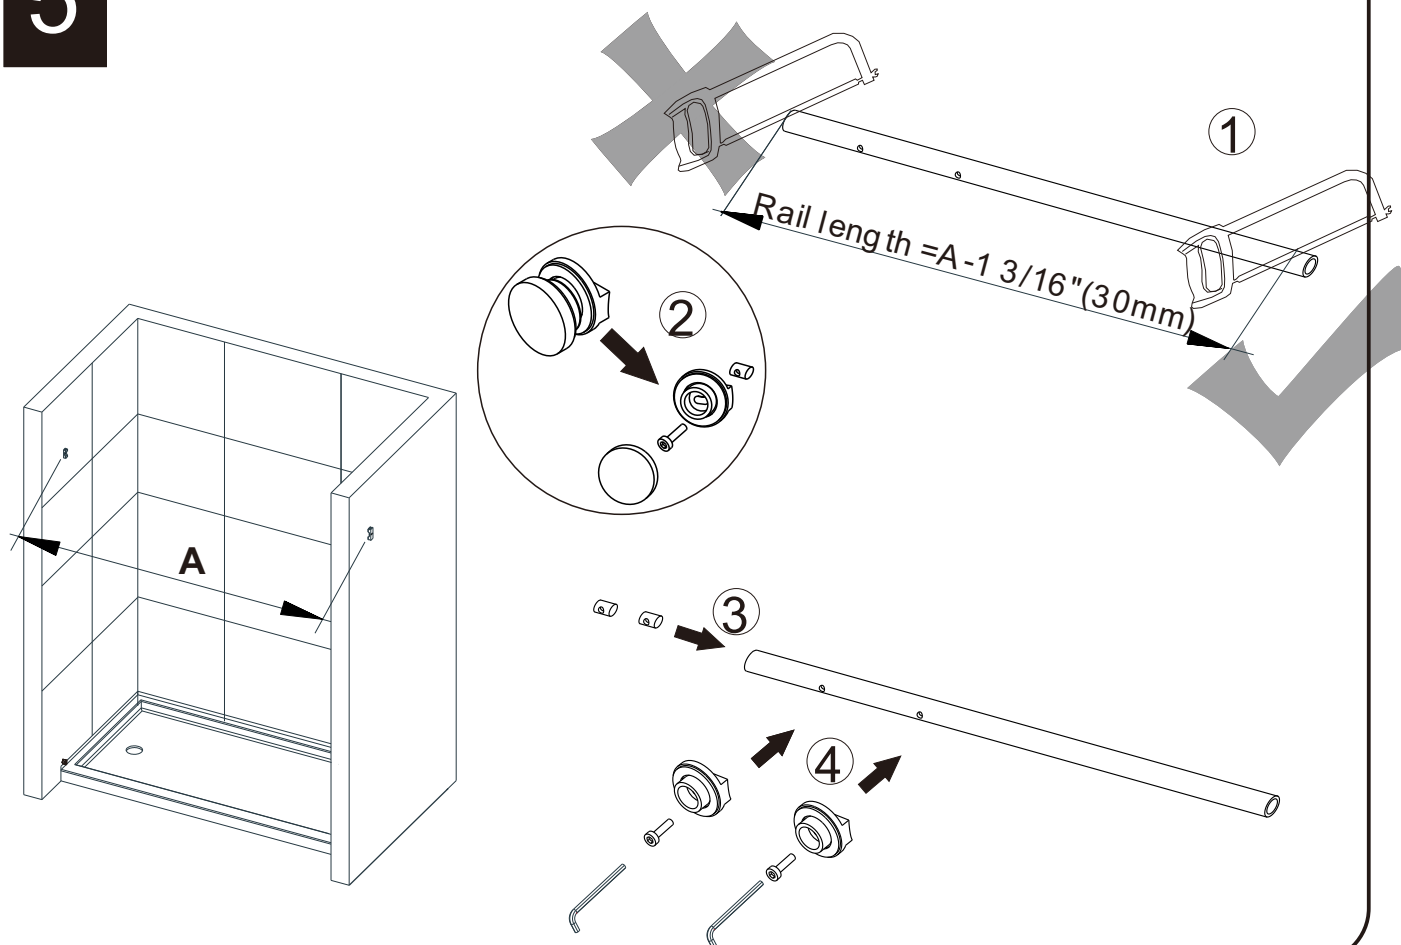


6

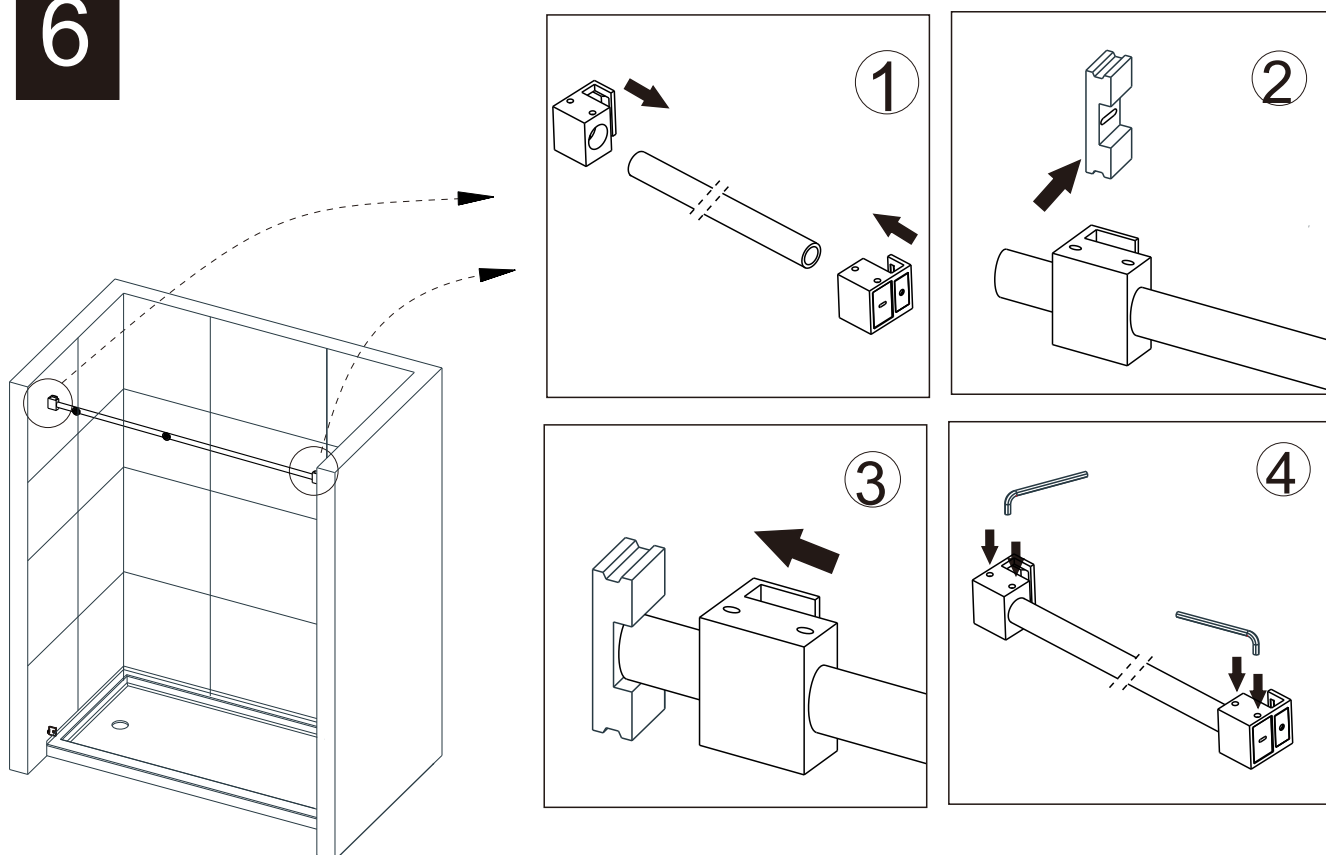

7


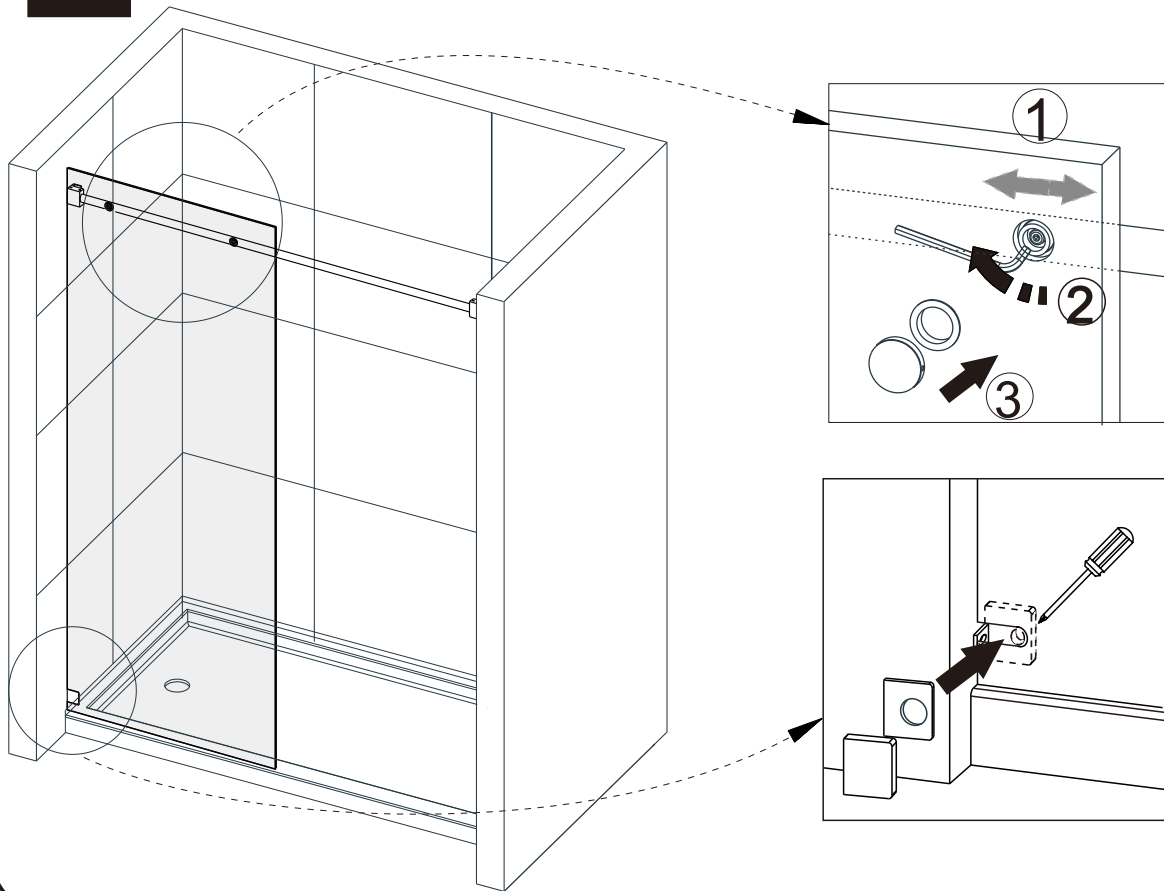


8

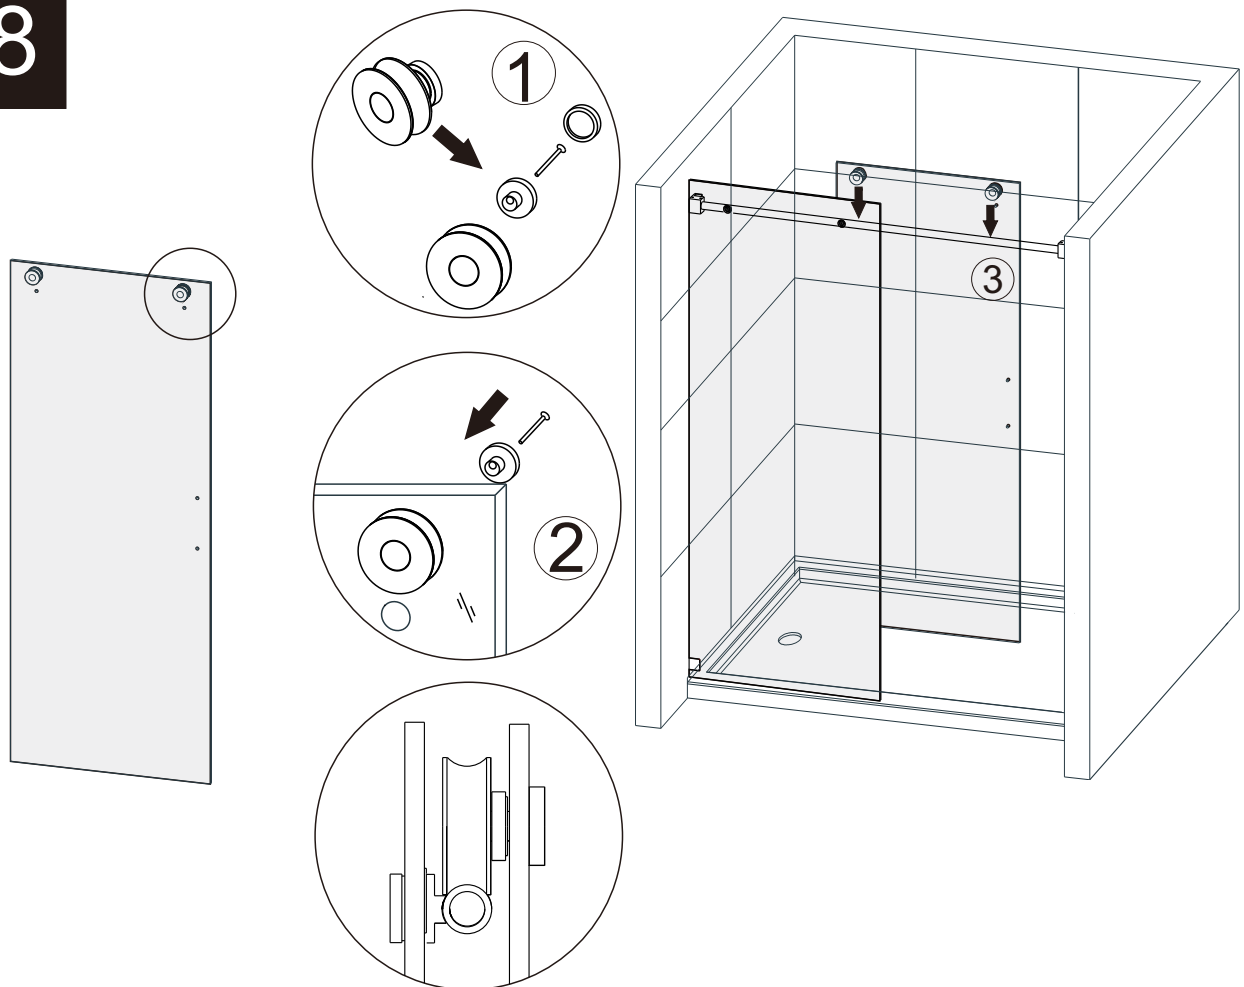







9

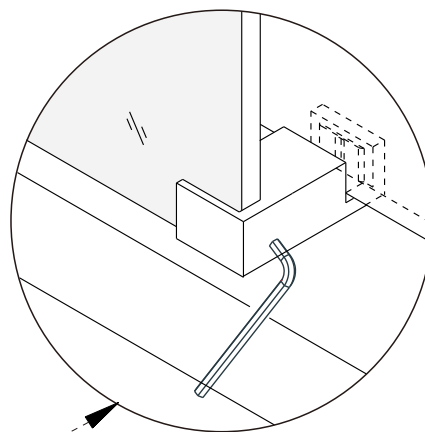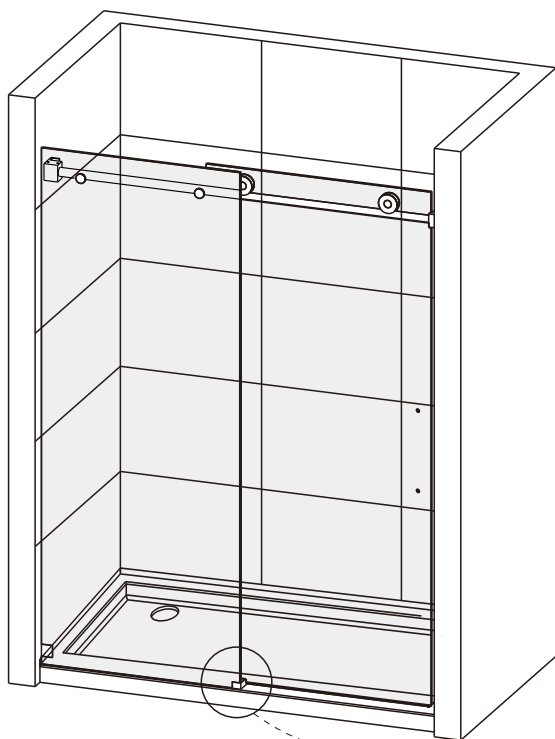


10


NOTE: Please rotate the rim of the roller to adjust the height of the glass by inserting the Allen key into the hole on the rim

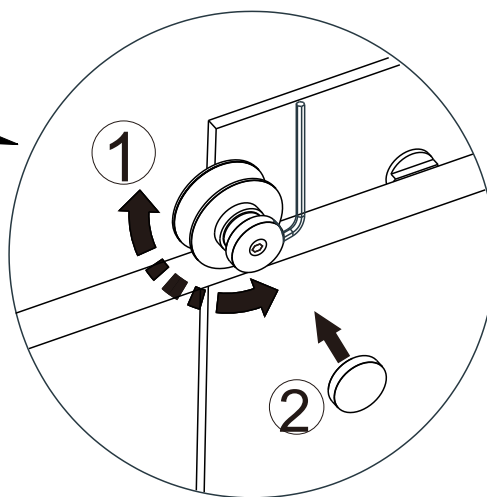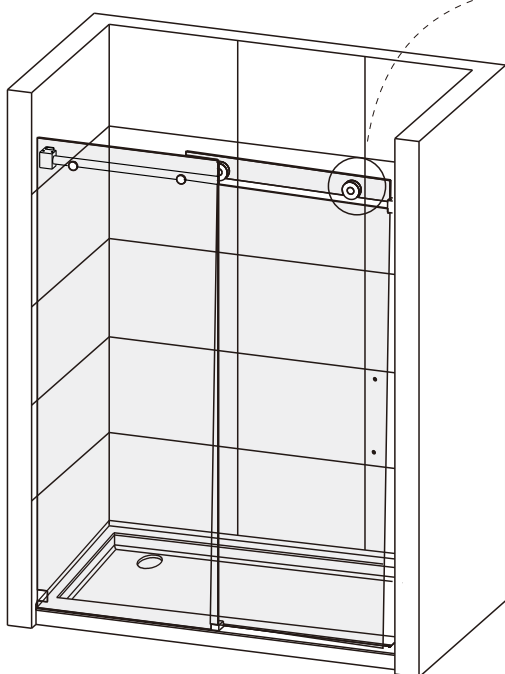


# 11

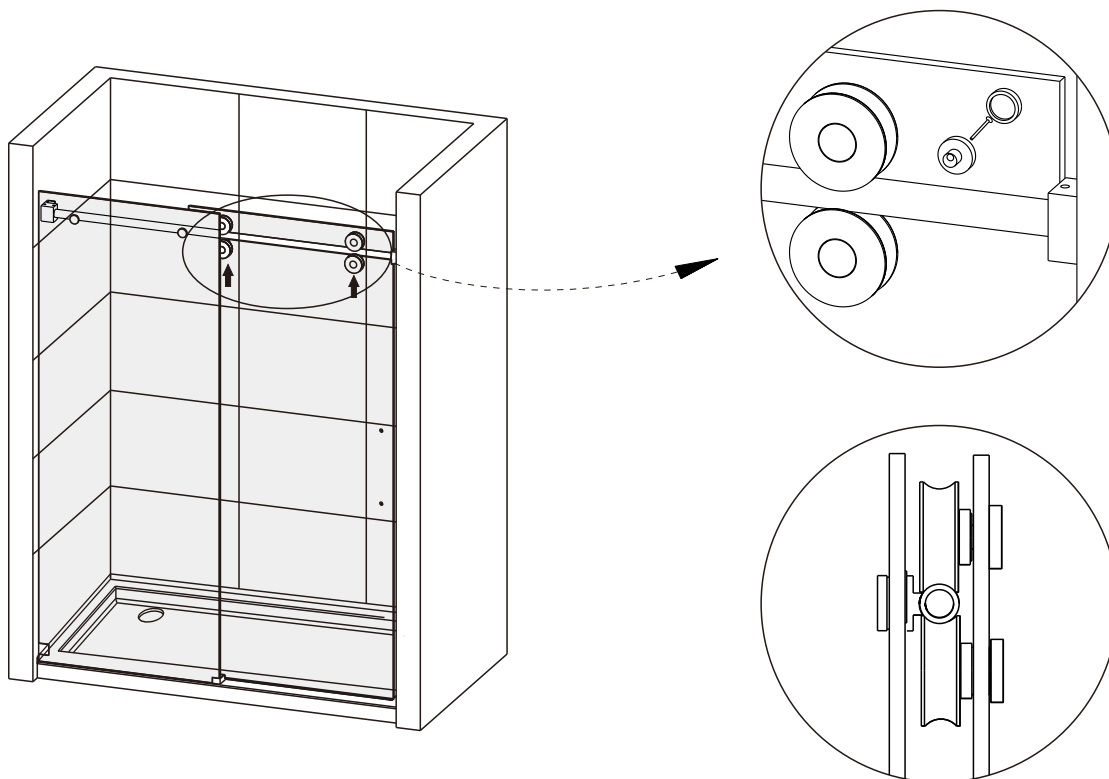



# 12

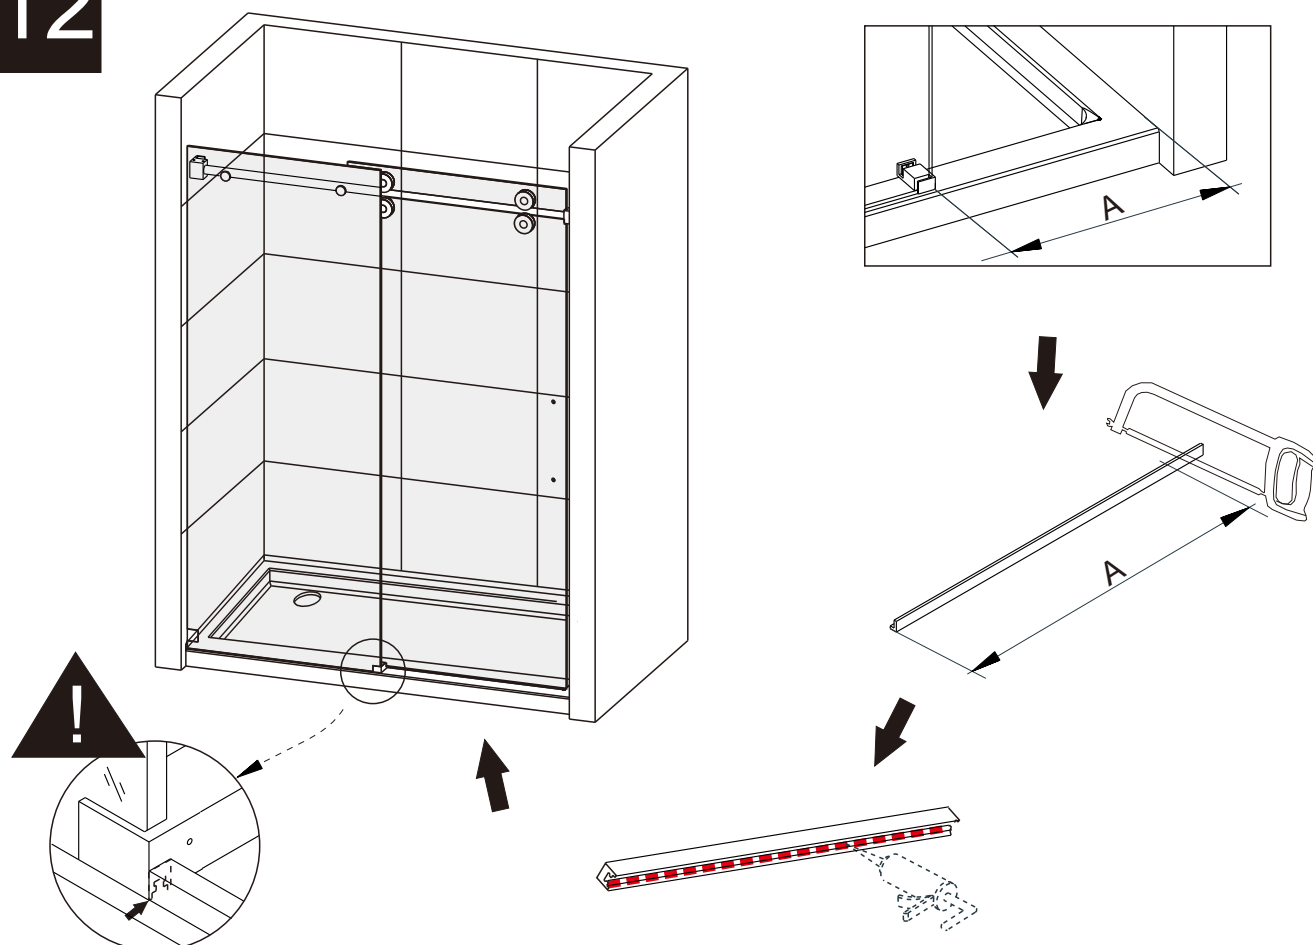

13

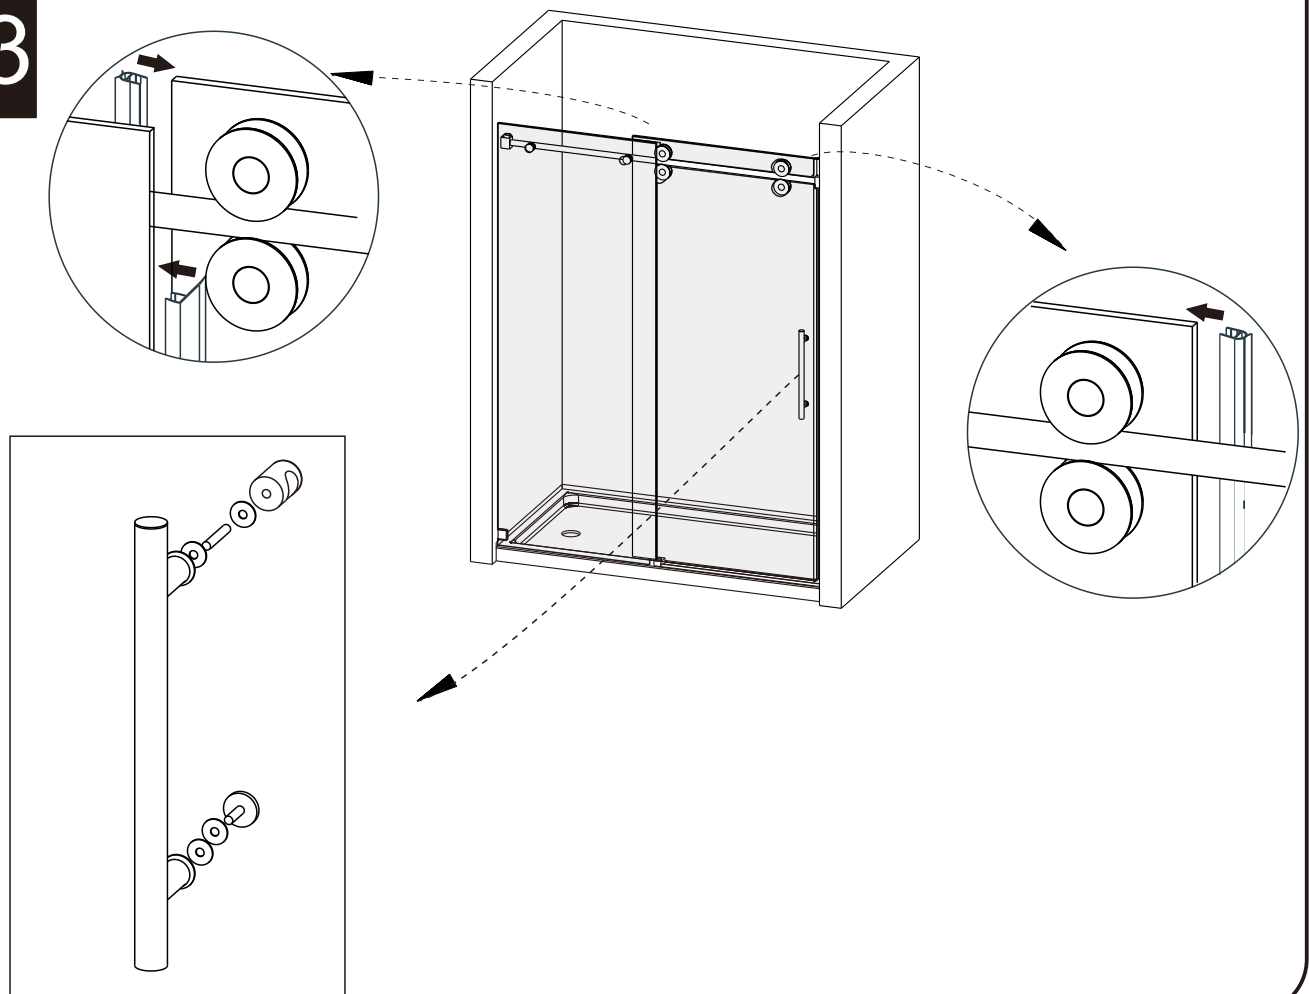

14

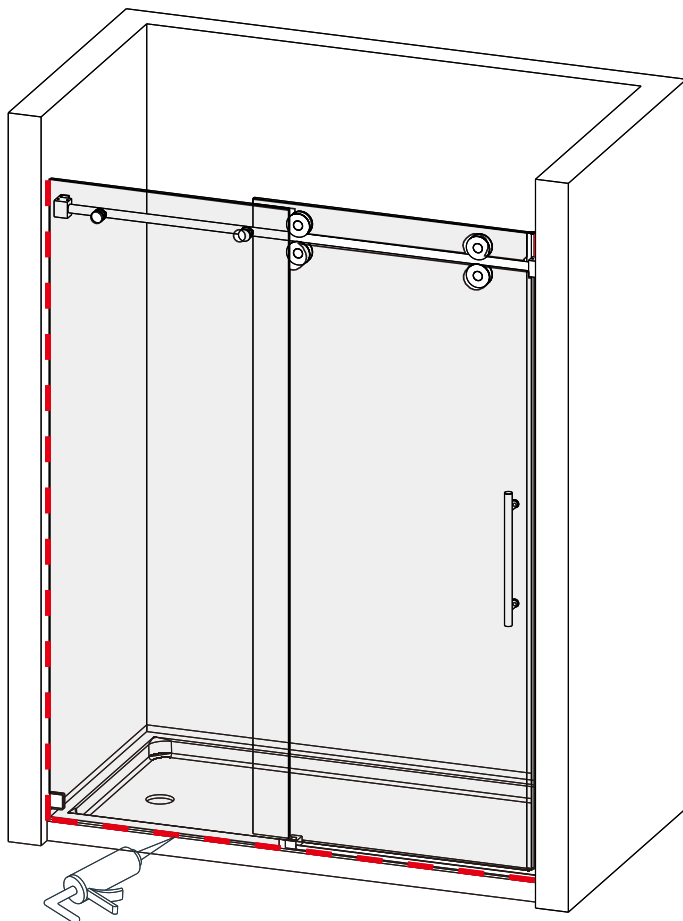

**24** HOURS