



INSTRUCTIONS FOR INSTALLING INSYNC ENG OVERLAYS DEPICTED BELOW:

INSYNC P/N
D13032

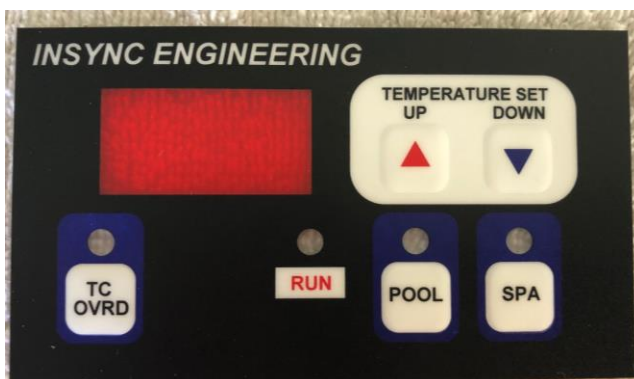

INSYNC P/N
D13033

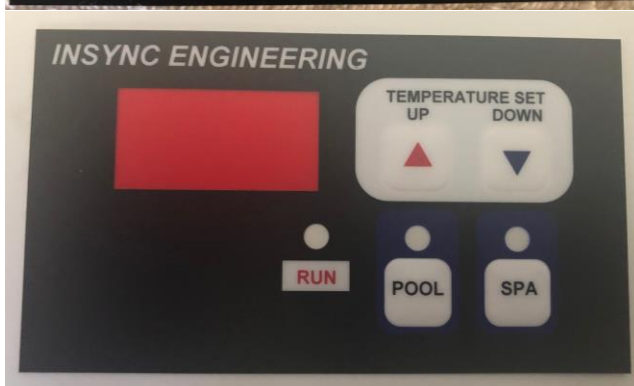

“All HAYWARD trademarks and logos are owned by HAYWARD or one of its global affiliates.

EXISTING HEAT PUMPS MAY LOOK LIKE THOSE DEPICTED BELOW



**REMOVE YOUR OLD WORN OUT OVERLAY, REPLACE WITH YOUR
NEW INSYNC ENGINEERING OVERLAY BY FOLLOWING THESE STEPS**

Disconnect power

Remove outer black cover screws

Disconnect main 14-pin harness

Remove 4 circuit board mounting screws from large black
cover

Disconnect two bezel clips (one on each side) holding bad
overlay mount to circuit boards

Peel old label

Make sure all appropriate bezel plate holes clear of label debris

Dry fit, ensuring proper holes (run, pool, spa) visible and switch
hole areas clear

Clean bezel with plastic cleaner and dry

Affix label

Connect Bezel Clips

Re-mount circuit board

Affix harness

Affix cover screws

Connect Power



**TIP: USE A HEAT GUN TO
REMOVE OLD OVERLAY**

