



Contents

• SCHEDULE 40 PVC PIPE	1
• SCHEDULE 80 PVC PIPE	2
• SCHEDULE 80 CPVC PIPE	3
• CPVC COPPER TUBE SIZE	4
• C900 PVC PRESSURE PIPE	5
• PVC SDR 35 / SDR 26	7
• CLASS PIPE RD	8
• PVC PIP IRRIGATION PIPE	11



SCHEDULE 40 PVC PIPE

Features:

- Light weight
- Low coefficient of friction
- Ease of installation
- Corrosion resistance
- It does not transmit odor or taste

Applications:

- Ideal for industrial applications:
- Chemical processes
 - Potable water systems
 - Water treatment
 - Irrigation



SCH 40 PVC PIPE						MANUFACTURED ACCORDING TO THE ASTM D1785*						
Diameter	Outside Diameter O.D.		Inside Diameter I.D.		Minimum Wall W		Minimum Water Pressure at 73.4 °F (23 °C)		Average Pipe Weight		Feet per skid	Skids per full truckload
in	in	mm	in	mm	in	mm	in	mm	lb/ft	kg/m		
½	0.840	21.34	0.609	15.5	0.109	2.8	600	42.1	0.157	0.23	12000	22
¾	1.050	26.67	0.810	20.6	0.113	2.9	480	33.7	0.210	0.31	8000	24
1	1.315	33.40	1.033	26.2	0.133	3.4	450	31.6	0.310	0.46	7060	19
1¼	1.660	42.16	1.363	34.6	0.140	3.6	370	26.0	0.420	0.62	4440	22
1½	1.900	48.26	1.593	40.5	0.145	3.7	330	23.2	0.504	0.75	2900	29
2	2.375	60.32	2.049	52.0	0.154	3.9	280	19.7	0.676	1.00	3860	16
2½	2.875	73.02	2.445	62.1	0.203	5.2	300	21.1	1.070	1.59	2900	14
3	3.500	88.90	3.042	77.3	0.216	5.5	260	18.3	1.410	2.10	2080	12
4	4.500	114.30	3.998	101.5	0.237	6.0	220	15.4	2.000	2.97	1340	12
6	6.625	168.28	6.031	153.2	0.280	7.1	180	12.6	3.520	5.23	600	12
8	8.625	219.08	7.942	201.7	0.322	8.2	160	11.2	5.390	8.01	360	12
10	10.750	273.05	9.976	253.4	0.365	9.3	140	9.8	7.550	11.22	220	12
12	12.750	323.85	11.889	302.0	0.406	10.3	130	9.1	10.010	14.87	160	12
14	14.000	355.60	13.126	333.4	0.437	11.1	130	9.1	11.801	17.53	160	9
16	16.000	406.40	15.000	381.0	0.500	12.7	130	9.1	15.431	22.93	160	8
18	18.000	457.20	16.825	427.4	0.562	14.3	130	9.1	20.286	30.18		25
20	20.000	508.00	18.761	476.5	0.593	15.1	120	8.4	23.832	35.46		20
24	24.000	609.60	22.564	573.1	0.687	17.4	12	8.4	33.136	49.30		16

* Dual marked ASTM D1785 and ASTM D2665.
NSF Listed meets all requirements of ASTM D1785, ASTM D1784 and ASTM D2665.



SCHEDULE 80 PVC PIPE

Features

- Light weight
- Low coefficient of friction
- Ease of installation
- Corrosion resistance
- It does not transmit odor or taste


Applications:

- Ideal for industrial applications:
- Chemical processes
 - Potable water systems
 - Water treatment
 - Irrigation



SCH 80 PVC PIPE						MANUFACTURED ACCORDING TO THE ASTM D1785*						
Diameter	Outside Diameter O.D.		Inside Diameter I.D.		Minimum Wall W		Minimum Water Pressure at 73.4 °F (23 °C)		Average Pipe Weight		Feet per skid	Skids per full truckload
in	in	mm	in	mm	in	mm	in	mm	lb/ft	kg/m		
½	0.840	21.34	0.535	13.6	0.146	3.7	850	58.6	0.208	0.309	12000	22
¾	1.050	26.67	0.732	18.6	0.154	3.9	690	47.6	0.283	0.422	8000	24
1	1.315	33.40	0.937	23.8	0.181	4.6	630	43.4	0.420	0.625	7060	19
1¼	1.660	42.16	1.260	32.0	0.193	4.9	520	35.9	0.577	0.860	4440	22
1½	1.900	48.26	1.481	37.6	0.200	5.1	470	32.4	0.702	1.045	2900	29
2	2.375	60.32	1.921	48.8	0.217	5.5	400	27.6	0.960	1.438	3860	16
2½	2.875	73.02	2.299	58.4	0.276	7.0	420	29.0	1.482	2.205	2900	14
3	3.500	88.90	2.875	73.0	0.299	7.6	370	25.5	1.974	2.938	2080	12
4	4.500	114.30	3.791	96.3	0.339	8.6	320	22.1	2.905	4.322	1340	12
6	6.625	168.28	5.720	145.3	0.433	11.0	280	19.3	5.537	8.239	600	12
8	8.625	219.08	7.582	192.6	0.500	12.7	250	17.2	8.392	12.488	360	12
10	10.750	273.05	9.514	241.8	0.591	15.0	230	15.9	12.479	18.568	220	12
12	12.750	323.85	11.311	287.3	0.689	17.5	230	15.9	17.140	25.503	160	12
14	14.000	355.60	12.424	315.7	0.752	19.1	220	15.4	20.557	30.587	160	9
16	16.000	406.40	14.240	361.7	0.843	21.4	220	15.4	26.428	39.323	160	8
18	18.000	457.20	16.042	407.5	0.937	23.8	220	15.5	33.060	49.19		25
20	20.000	508.00	17.845	453.3	1.031	26.2	220	15.5	40.462	60.20		20
24	24.000	609.60	21.454	544.9	1.218	30.9	210	14.8	56.899	84.66		16

* Dual marked ASTM D1785 and ASTM D2665.
NSF Listed meets all requirements of ASTM D1785, ASTM D1784 and ASTM D2665.



SCHEDULE 80 CPVC PIPE

Features:

- Light weight
- Low coefficient of friction
- Ease of installation
- Corrosion resistance
- It does not transmit odor or taste

Applications:


- Ideal for industrial applications:
- Chemical processes
 - Potable water systems
 - Water treatment
 - Irrigation



SCH 80 CPVC PIPE						MANUFACTURED ACCORDING TO THE ASTM D1785*						
Diameter	Outside Diameter O.D.		Inside Diameter I.D.		Minimum Wall W		Minimum Water Pressure at 73.4 °F (23 °C)		Average Pipe Weight		Feet per skid	Skids per full truckload
in	in	mm	in	mm	in	mm	in	mm	lb/ft	kg/m		
½	0.840	21.34	0.533	13.5	0.147	3.7	850	59.8	0.208	0.309	9600	21
¾	1.050	26.67	0.728	18.5	0.154	3.9	690	48.5	0.284	0.422	5700	27
1	1.315	33.40	0.941	23.9	0.179	4.6	630	44.3	0.420	0.625	4000	25
1¼	1.660	42.16	1.261	32.0	0.191	4.9	520	36.6	0.578	0.860		
1½	1.900	48.26	1.482	37.6	0.200	5.1	470	33.0	0.702	1.045		
2	2.375	60.32	1.919	48.8	0.218	5.5	400	28.1	0.966	1.438	1600	27
2½	2.875	73.02	2.298	58.4	0.276	7.0	420	29.5	1.482	2.205	1200	24
3	3.500	88.90	2.873	73.0	0.300	7.6	370	26.0	1.975	2.938	1060	20
4	4.500	114.30	3.796	96.4	0.337	8.6	320	22.5	2.905	4.322	560	26
6	6.625	168.28	5.722	145.3	0.432	11.0	280	19.7	5.537	8.239	280	27
8	8.625	219.08	7.580	192.5	0.500	12.7	250	17.6	8.393	12.488		

* Dual marked ASTM D1785 and ASTM D2665.

NSF Listed meets all requirements of ASTM D1785, ASTM D1784 and ASTM D2665.



CPVC COPPER TUBE SIZE


It is a comprehensive CPVC system that combines quality, technological development and experience of top materials and the high technology and manufacturing of EMMSA, resulting in a system of the highest quality.

We offer you high performance, consistency and uniformity because we have a unique production, using specialized equipment of the highest quality focused on CPVC.

Applications:

Ideal for industrial applications:

- Hot and cold water pressure distribution systems in residential and commercial applications.



PLAIN END SDR11		MANUFACTURED ACCORDING TO THE ASTM D2846	
Diameter	Average Outside Diameter	Minimum Wall Thickness	Average Weight
in	in	in	lb/m
½	0.625	0.060	0.26
¾	0.875	0.080	0.47
1	1.125	0.102	0.76
1¼	1.375	0.125	1.12
1½	1.625	0.148	1.55
2	2.125	0.193	2.63

PVC ELECTRICAL CONDUIT

Features:

- Reduced emissions of smoke & HCL.
- Listed for 90°C conductors or cable.
- Rigid nonmetallic raceway for wires and cables.
- Superior weathering characteristics.
- Self-extinguishing. Does not spread the flame which is a safety condition in electrical installations.
- **Duration.** Very high durability because it does not corrode, even when installed in very aggressive environments.
- **Safety in the wiring.** Its smooth and burr-free walls allow fast and efficient wiring, without damaging the cable sheath.
- **Lightweight.** PVC pipe is five times lighter than metal pipe, making it easier to handle.



SCHEDULE 40 ELECTRICAL CONDUIT		MANUFACTURED ACCORDING TO THE UL 651	
Diameter	Weight 100'	O.D.	I.D.
in	in	in	in
½	16.40	0.840	0.622
¾	21.80	1.050	0.824
1	32.10	1.315	1.049
1¼	43.40	1.660	1.380
1½	51.80	1.900	1.610
2	69.50	2.375	2.067
2½	109.60	2.875	2.469
3	143.50	3.500	3.068
4	204.30	4.500	4.026
6	360.00	6.625	6.065

C900 PVC PRESSURE PIPE



Used for distribution pipelines of potable water

Features:

- High-pressure resistance
- Hydraulic efficiency
- Durability
- Corrosive resistant
- In pumping costs
- Impact resistance




DIMENSION CLASS 165 (RD-25)							NSF / UL 1285				
Diameter	Average Outside Diameter		Average Inside Diameter		Wall Thickness		Distance Between Assembly Mark to en of Spigote		Bell Outside Diameter		Aproximate Weight
	O.D.		I.D.		T		E		D		
in	in	mm	in	mm	in	mm	in	mm	in	mm	
4	4.80	121.90	4.39	111.50	0.193	4.90	4.75	120.7	6.40	162.6	2.73
6	6.90	175.30	6.30	160.00	0.276	7.00	5.50	139.7	8.80	223.5	5.63
8	9.05	229.90	8.28	210.30	0.362	9.20	6.25	158.8	11.40	289.6	9.68
10	11.10	281.90	10.16	253.10	0.445	11.30	7.00	177.8	13.80	350.5	15.10
12	13.20	335.30	12.08	306.80	0.528	13.40	7.80	198.1	15.90	403.9	21.34

DIMENSION CLASS 235 (RD-18)						NSF A FM 1612 / UL 1285					
4	4.80	121.90	4.23	107.40	0.268	6.80	4.75	120.7	6.50	165.10	3.72
6	6.90	175.30	6.09	154.70	0.382	9.70	5.50	139.7	9.00	228.60	7.33
8	9.05	229.90	7.98	202.70	0.504	12.80	6.25	158.8	11.60	294.60	13.22
10	11.10	281.90	9.79	248.70	0.618	15.70	7.00	177.8	14.10	358.10	20.60
12	13.20	335.30	11.65	295.90	0.732	18.60	7.80	198.1	16.34	415.00	29.30

DIMENSION CLASS 305 (RD-14)*						NSF A FM 1612 / UL 1285					
4	4.80	121.90	4.08	103.70	0.343	8.70	4.75	120.7	6.65	168.92	4.73
6	6.90	175.30	5.87	149.10	0.493	12.50	5.50	139.7	9.22	234.24	9.78
8	9.05	229.90	7.70	195.60	0.646	16.40	6.25	158.8	11.88	301.82	16.82
10	11.10	281.90	9.44	239.80	0.793	20.10	7.00	177.8	14.45	366.98	24.73
12	13.20	335.30	11.23	285.20	0.943	24.00	7.80	198.1	16.76	425.70	34.99

*FM 1612 calculates the rating pressure for RD-18 to 185 psi and RD-14 to 250 psi

C900 PVC PRESSURE PIPE

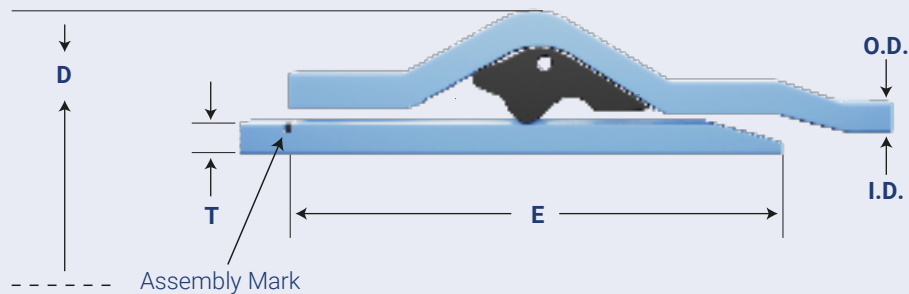

O.D. Average Outside Diameter

I.D. Average Inside Diameter

T Wall Thickness

E Distance Between
Assembly Mark to
en of Spigote

D Bell Outside
Diameter



Joints With Locked in Gaskets

CRESCO® C900 joints can be assembled quickly. The factory installed RIEBER type gasket provides a tight seal that protects the line from shock, vibration, earth movement and compensates for expansion and contraction of pipe lengths.

Additionally, there is no need for application of cement. It's a simple push-together operation to achieve a tight joint.

- Factory installed gasket for ease of assembly
- Spigot pipe end supplied with bevels from factory
- The bell is an integral part of the pipe length

CRESCO® C900 pipe used for distribution pipelines of potable water manufactured in blue color conforms to ANSI/AWWA C900 gaskets meet ASTM F447 and joints comply with ASTM D3139.

NSF 61/NSF 14
NSF certified to UL 1285

PVC SDR 35 / SDR 26

Durafort by CRESCO® PVC SDR 35 / SDR 26 Sanitary Sewer Pipe is manufactured with an integrated RIEBER gasket ring in all its diameters, which provides greater safety in handling and installation since the elastomeric gasket always remains in place and guarantees a good coupling with the spigot.


Applications: • Sewer



ASTM D3034 / F679

Gasketed sewer pipe specifications


Pipe standard:	ASTM D3034 / ASTM F679
Pipe compound:	ASTM D1784 Cell Class 12454
Gasket standard:	ASTM F477
Wall thickness:	ASTM D3034 / ASTM F679
Applications:	Wastewater and Drainage
Length:	20'
Installation:	ASTM D2321
Pipe joint standard:	ASTM D3212
Pressure ratings:	Not rated for pressure applications
Maximum angular joint deflection:	1"

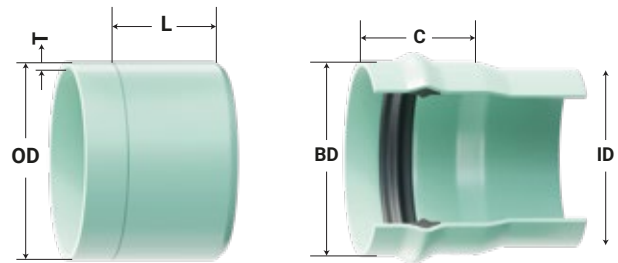

Dimensions for estimating purposes
Pipe stiffness per ASTM D2412 at 5% deflection
Internal diameter calculated with nominal outside diameter and minimum wall thickness.

PSM gravity sewer pipe | Gasketed integral bell

	Diameter	Outside Diameter	SDR	Pipe Stiffness	Minimum wall Thickness	Internal Diameter	Approximate bell diameter	Bell depth	Insertion mark
		O.D.			w	I.D.	BD	C	L
		in		psi	in	in	in	in	in
ASTM D3034	4"	4.215	35	46	0.120	3.975	5.000	4.125	3.500
			26	115	0.162	3.891			
	6"	6.275	35	46	0.180	5.915	7.375	4.625	4.000
			26	115	0.241	5.793			
	8"	8.400	35	46	0.240	7.920	9.625	5.250	4.125
			26	115	0.323	7.754			
	10"	10.500	35	46	0.300	9.900	12.250	5.875	5.125
			26	115	0.404	9.692			
	12"	12.500	35	46	0.360	11.780	14.375	6.500	5.375
			26	115	0.481	11.538			
	15"	15.300	35	46	0.437	14.426	17.500	7.750	7.375
			26	115	0.588	14.124			
ASTM F679	18"	18.701	35	46	0.499	17.703	21.000	9.625	8.000
			26	115	0.671	17.359			
	24"	21.803	35	46	0.661	23.481	28.500	11.750	10.000
			26	115	0.889	23.025			



Solvent weld

Features:

- **Resistant to Corrosive:**

The material is impervious to corrosive agents such as sewer gas, sulfuric acid, and both alkaline and acidic soils.

- **Reliable Flow Capacity:**

With a consistent flow coefficient of C=150, it ensures reduced expenses in both pumping and material costs.

- **Robust Structural Joints:**

The design includes strong joints that offer a firm and stable connection




Applications:

Ideal for industrial applications:

- Plumbing
- Drainage
- Irrigation

		SDR 13.5/CL 315			SDR 17/CL 250			SDR 21/CL 200			Per Truck Quantity
Diameter D'		Minimum Wall Thickness w	Inside Diameter I.D.	Weight	Minimum Wall Thickness w	Inside Diameter I.D.	Weight	Minimum Wall Thickness w	Inside Diameter I.D.	Weight	
in	mm	mm	mm	kg/m	mm	mm	kg/m	mm	mm	kg/m	
½	21.3	1.6	17.7	0.2	-	-	-	-	-	-	11,200
¾	26.8	2.0	22.2	0.2	1.6	23.0	0.2	1.5	423.1	0.2	7,000
1	33.5	2.5	28.0	0.4	2.0	29.0	0.3	1.6	29.7	0.3	5,050
1 ¼	42.3	3.1	35.4	0.6	2.5	36.7	0.5	2.0	37.6	0.4	3,600
1 ½	48.3	3.6	40.6	0.8	2.8	42.1	0.6	2.3	43.2	0.5	2,000
2	60.3	4.5	50.9	1.2	3.6	52.7	1.0	2.9	54.1	0.8	1,350
2 ½	73.0	5.4	61.5	1.7	4.3	63.9	1.4	3.5	65.6	1.2	1,000
3	88.9	6.6	75.0	2.6	5.2	77.8	2.1	4.2	79.9	1.7	700
4	114.3	8.5	96.4	4.3	6.7	100.0	3.5	5.4	102.8	2.8	440
6	168.3	-	-	-	9.9	147.3	7.5	8.0	151.3	6.1	190
8	219.1	-	-	-	12.9	191.7	12.7	10.4	197.0	10.4	130
10	273.1	-	-	-	16.1	239.0	19.7	13.0	245.5	16.1	56
12	323.9	-	-	-	19.1	283.5	27.7	15.4	291.2	22.7	42
14	355.6	-	-	-	20.9	311.3	33.4	16.9	319.7	27.3	42
16	406.4	-	-	-	23.9	355.7	43.6	19.4	365.4	35.7	35





Solvent weld

Diameter D ¹		SDR 26/CL 160			SDR 32.5/CL 125			SDR 41/CL 100			Per Truck Quantity
		Minimum Wall Thickness	Inside Diameter	Weight	Minimum Wall Thickness	Inside Diameter	Weight	Minimum Wall Thickness	Inside Diameter	Weight	
		w	I.D.		w	I.D.		w	I.D.		
in	mm	mm	mm	kg/m	mm	mm	kg/m	mm	mm	kg/m	Pipes
½	21.3	-	-	-	-	-	-	-	-	-	11,200
¾	26.8	-	-	-	-	-	-	-	-	-	7,000
1	33.5	1.5	29.8	0.3	-	-	-	-	-	-	5,050
1 ¼	42.3	1.6	38.4	0.3	1.5	38.6	0.3	-	-	-	3,600
1 ½	48.3	1.9	44.0	0.4	1.5	44.7	0.4	-	-	-	2,000
2	60.3	2.3	55.2	0.7	1.9	56.1	0.6	-	-	-	1,350
2 ½	73.0	2.8	66.9	1.0	2.2	68.0	0.8	-	-	-	1,000
3	88.9	3.4	81.5	1.4	2.7	82.9	1.2	2.2	84.1	0.9	700
4	114.3	4.4	105.0	2.3	3.5	106.8	1.9	2.8	108.2	1.5	440
6	168.3	6.5	154.5	5.0	5.2	157.3	4.0	4.1	159.5	3.2	190
8	219.1	8.4	201.2	8.5	6.7	204.8	6.8	5.3	207.8	5.4	130
10	273.1	10.5	250.8	13.2	8.4	255.2	10.6	6.7	259.0	8.5	56
12	323.9	12.4	297.5	18.5	10.0	302.7	14.9	7.9	307.1	11.9	42
14	355.6	13.7	326.6	22.3	10.9	332.5	18.0	8.7	337.1	14.5	42
16	406.4	15.6	373.3	29.2	12.5	379.9	23.5	9.9	385.2	19.0	35



Gasket end



RING INTEGRATED

The IPS Pipe is manufactured with an integrated RIEBER ring in all diameters, which provides greater safety in handling and installation, since the rubber ring always remains in place and guarantees good coupling with the spigot.



GASKET END

		SDR 13.5/CL 315			SDR 17/CL 250			SDR 21/CL 200			Per Truck Quantity
Diameter D'		Minimum Wall Thickness w	Inside Diameter I.D.	Weight	Minimum Wall Thickness w	Inside Diameter I.D.	Weight	Minimum Wall Thickness w	Inside Diameter I.D.	Weight	
in	mm	mm	mm	kg/m	mm	mm	kg/m	mm	mm	kg/m	
1 ½	48.3	3.6	40.6	0.8	2.8	42.1	0.6	2.3	43.2	0.5	2,000
2	60.3	4.5	50.9	1.2	3.6	52.7	1.0	2.9	54.1	0.8	1,350
2 ½	73.0	5.4	61.5	1.8	4.3	63.9	1.4	3.5	65.6	1.2	1,000
3	88.9	6.6	75.0	2.6	5.2	77.8	2.1	4.2	79.9	1.7	700
4	114.3	8.5	96.4	4.3	6.7	100.0	3.5	5.4	102.8	2.8	440
6	168.3	-	-	-	9.9	147.3	7.5	8.0	151.3	6.2	190
8	219.1	-	-	-	12.9	191.7	12.8	10.4	197.0	10.4	130
10	273.1	-	-	-	16.1	239.0	19.8	13.0	245.5	16.2	56
12	323.9	-	-	-	19.1	283.5	27.9	15.4	291.2	22.8	42
14	355.6	-	-	-	20.9	311.3	33.6	16.9	319.7	27.5	42
16	406.4	-	-	-	23.9	355.7	43.9	19.4	365.4	-	35

		SDR 26/CL 160			SDR 32.5/CL 125			SDR 41/CL 100			Per Truck Quantity
Diameter D'		Minimum Wall Thickness w	Inside Diameter I.D.	Weight	Minimum Wall Thickness w	Inside Diameter I.D.	Weight	Minimum Wall Thickness w	Inside Diameter I.D.	Weight	
in	mm	mm	mm	kg/m	mm	mm	kg/m	mm	mm	kg/m	
1 ½	48.3	1.9	44.1	0.4	1.5	44.7	0.4	-	-	-	2,000
2	60.3	2.3	55.2	0.7	1.9	56.1	0.6	-	-	-	1,350
2 ½	73.0	2.8	66.9	1.0	2.2	68.0	0.8	-	-	-	1,000
3	88.9	3.4	81.5	1.4	2.7	82.9	1.2	2.2	84.1	84.1	700
4	114.3	4.4	105.0	2.3	3.5	106.8	1.9	2.8	108.2	108.2	440
6	168.3	6.5	154.5	5.0	5.2	157.3	4.1	4.1	159.6	159.6	190
8	219.1	8.4	201.2	8.5	6.7	204.8	6.9	5.3	207.8	207.8	130
10	273.1	10.5	250.8	13.3	8.4	255.2	10.7	6.7	259.0	259.0	56
12	323.9	12.5	297.5	18.6	10.0	302.7	15.0	7.9	307.1	307.1	42
14	355.6	13.7	326.6	22.5	10.9	332.5	18.1	8.7	337.1	337.1	42
16	406.4	15.6	373.3	29.4	12.5	379.9	23.7	9.9	385.2	385.2	35



Gasketed Integral Bell

EMMSA USA is continuously striving to offer the highest quality in every single of its products. In this effort, we try to provide our customers with practical and effective solutions for each of their needs.

Applications: Systems agricultural irrigation, gravity pipes, secondary lines in drip micro-sprinkler systems, among other.



PVC PIP IRRIGATION PIPE		MANUFACTURED ACCORDING TO THE ASTM D1784 / ASTM D2241 / ANNEX A1 NCRS 430-DD								
Diameter		Average Outside Diameter O.D.		Average Inside Diameter I.D.		Minimum Wall w		Pressure Diameter	Weight	
in		in	mm	in	mm	in	mm	psi	lb/pie	kg/m
SDR 51 (PIP80)	6	6.140	155.95	5.900	149.9	0.120	3.05	80	1.52	2.27
	8	8.160	207.26	7.840	199.1	0.160	4.06	80	2.69	4.01
	10	10.200	259.08	9.800	248.9	0.200	5.08	80	4.21	6.28
	12	12.240	310.89	11.760	298.7	0.240	6.10	80	6.08	9.06
	15	15.300	388.62	14.700	373.4	0.300	7.62	80	9.56	14.25
SDR 41 (PIP100)	6	6.140	155.95	5.840	148.3	0.150	3.81	100	1.88	2.80
	8	8.160	207.26	7.762	197.2	0.199	5.05	100	3.23	4.82
	10	10.200	259.08	9.702	246.4	0.249	6.32	100	5.22	7.78
	12	12.240	310.89	11.642	295.7	0.299	7.59	100	7.54	11.24
	15	15.300	388.62	14.554	369.7	0.373	9.47	100	11.84	17.65
SDR 32.5 (PIP125)	6	6.140	155.95	5.762	146.35	0.189	4.80	125	2.40	3.58
	8	8.160	207.26	7.658	194.52	0.251	6.37	125	4.16	6.20
	10	10.200	259.08	9.572	243.14	0.314	7.97	125	6.53	9.73
	12	12.240	310.89	11.486	291.75	0.377	9.57	125	9.43	14.06
	15	15.300	388.62	14.358	364.70	0.471	11.96	125	14.86	22.15



DURAFORT by
CRESCU

Durafort by **CRESCU** 3" PVC 1120 SCH 40



Manufactured & Distributed by
EMMSA USA, Inc.

Av. Pedro Ramirez Vazquez No. 200-13, Torre Valmex Piso 4
Col. Valle Oriente, San Pedro Garza Garcia, N.L., 66269 Mexico

+52 (81) 2352-6399

info@emmsainc.com

EMMSA
—USA—
Piping Systems

emmsainc.com

Code: CatalogEMMSAUSA-06022025