

SLAM2000

New power for 3D mobile mapping

CORPORATE CULTURE

Value
Innovation
Integrity



SLAM2000 Parameter

Main body

Weight	925 g (Host), 1450 g (With handle and base)
Dimensions	94.5 mm x 84.6 mm x 219 mm (Host) 170 mm X 173.8 mm X 364.5 mm (With handle and base)
Power consumption	20W (Typical)
Input voltage	20V
Internal storage	512GB SSD
Working temperature	-20°C ~ 50°C (Operation), -40°C ~ 70°C (Storage)
Humidity	<95%
Protection class	IP54
Scanning FOV	Panoramic 360°

Accuracy

Point cloud thickness	< 1 cm (Post-processing), < 2 cm (Real-time)
Relative accuracy	< 1 cm (Post-processing), < 2 cm (Real-time)
Absolute accuracy	< 5 cm (Post-processing)

Laser scanner

Wavelength	905nm
Laser class	Class 1
Range	0.1 m ~ 70 m@ 80%
FOV	360°(H), -7°~ 52° (V)
Laser pulse repetition rate	200 kHz
Echo	Single (Strongest)
Frame rate	10 Hz (Typical)



Texture camera

Resolution	12MP
FOV	210° (Diagonal)
Frame rate	30 Hz

Visual camera

Resolution	12MP
FOV	100° (Diagonal)

Interface

USB Type-C 1	SSD data copy
USB Type-C 2	Charge by PD power bank, OTG (5 V)
Circular connector	External power supply (20 V), External S-RTK
WiFi	Supported

Lithium battery

Model	SP30
Input voltage	5V -20V
Output voltage	10.8 V
Battery Capacity	3000mAh
Weight	400 g
Dimensions	85 mm x 60 mm x 144.5 mm
Endurance	95 mins (SLAM2000 only)

Design & Material

Design

- Modern industrial design
- Streamline shape design
- Ergonomics handle
- More portable
- Eternal classic




Material

Aviation aluminum

- High-tech material
- Metal appearance
- Super eye-catching
- Lighter weight

***Create the future
Lead the world***

||| Laser Sensor

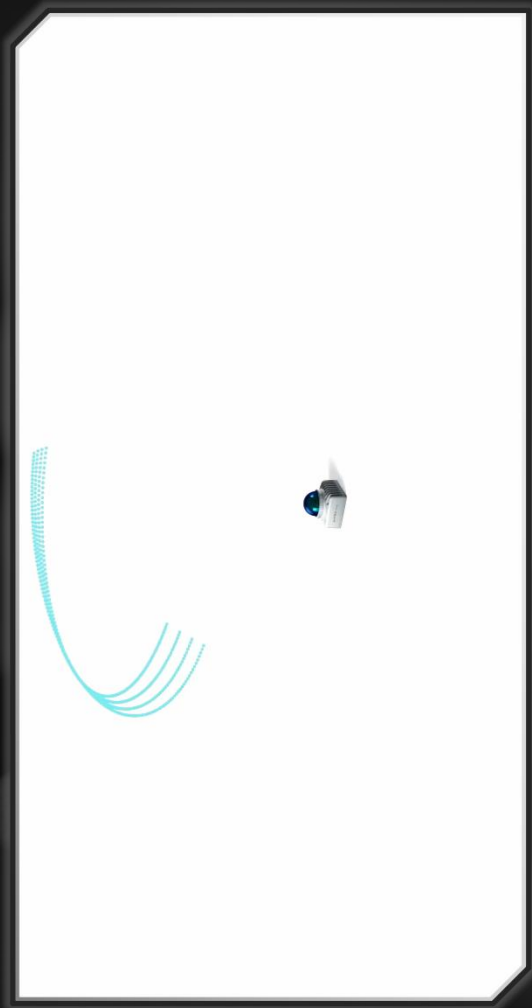

Minimum scanning range: 10cm

Active anti-jamming

Resistance to outdoor bright light


360° rotation

Dynamic panoramic laser FOV



***You can see when you walk,
and you can get what you see.***

Visual Camera

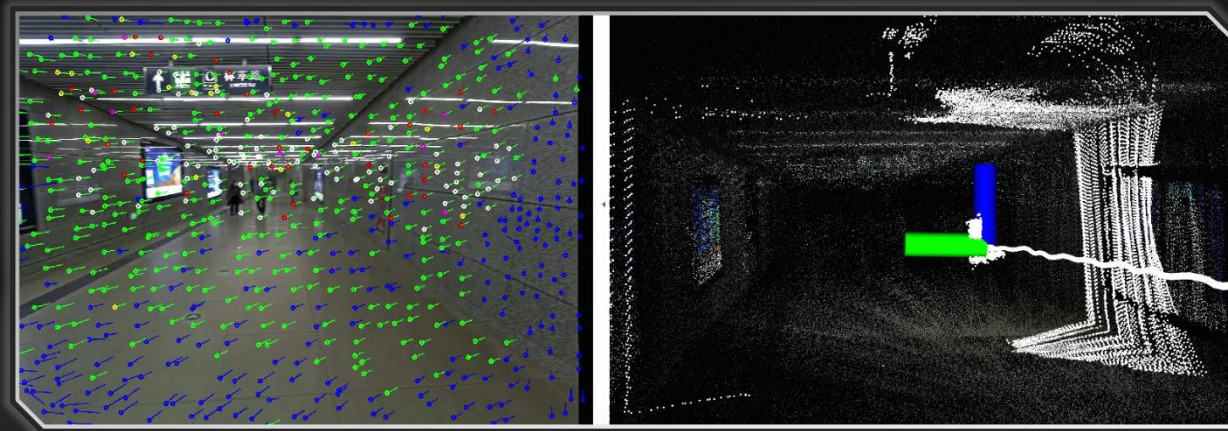

Result of vision matching



Result of regular corridor

Resolution: 12 MP

Frame frequency: 30Hz

FOV: 100°

Visual slam algorithm

- improve the adaptability of 3D reconstruction in scenes with weak structural features
- Avoid the failure or error cause by repetitive structure

Texture Camera



Original data

Resolution: 12 MP

Frame frequency: 30Hz

FOV: 210°




Color point cloud data

- Ultra-wide FOV
- Higher definition texture information
- Higher precision and higher definition color point
 - More realistic and clearer

SP30 battery handle



SP30 diagram

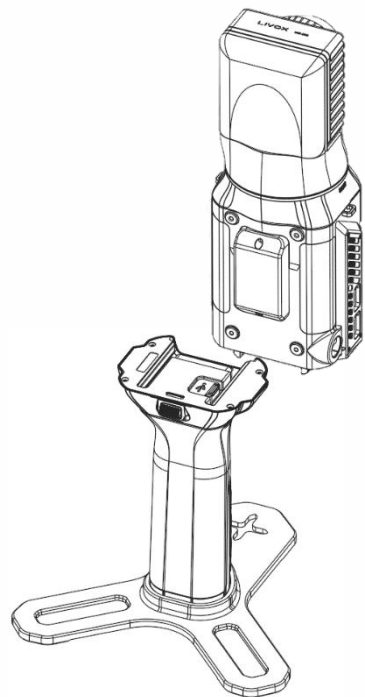


Installation and removal

Model:	SP30
Capacity:	3000mAh
Input voltage:	5-12V
Output voltage:	10.8V
Weight:	400g
Endurance:	95 mins

- Quick installation and removal
- Type-C charging interface
- Capacity indicator light
- Reduce the failure rate
- More comfortable
- CCC, CE, FCC



III Base and control point

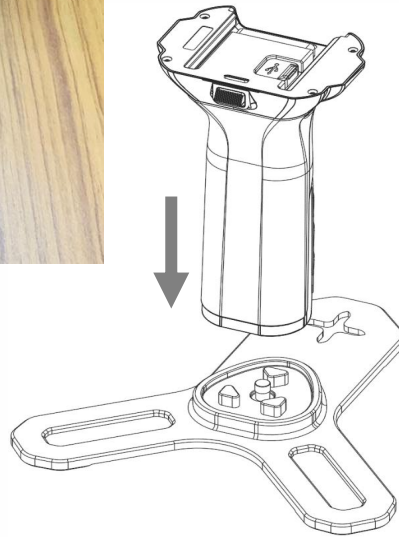


Installation and removal

Control point accuracy

SN of control points	Easting	Northing	Up	D X	D Y	D X Y	D Z
2	797901.763	2496711.178	0.647	0.005	0.009	0.010	-0.014
4	797869.027	2496748.783	0.255	0.015	0.008	0.017	-0.023
8	797822.294	2496854.722	1.227	0.018	-0.034	0.038	-0.013
12	797796.890	2496694.453	0.818	-0.012	0.005	0.013	-0.017
16	797829.012	2496678.097	0.668	-0.021	-0.015	0.026	-0.016
20	797867.316	2496636.012	0.493	0.018	-0.008	0.019	-0.023
MEAN				0.004	-0.006	0.021	-0.018
Mean square error				0.016	0.016	0.023	0.018

- Metal base
- Thinner and more stable
- Quick installation and removal
- Trigger mode instead of putting for 10s on control point
- Buzzer alerts the success or failure of control point collection and extraction
- Avoid leakage, overcollection, unclear collection of control point


High precision IMU

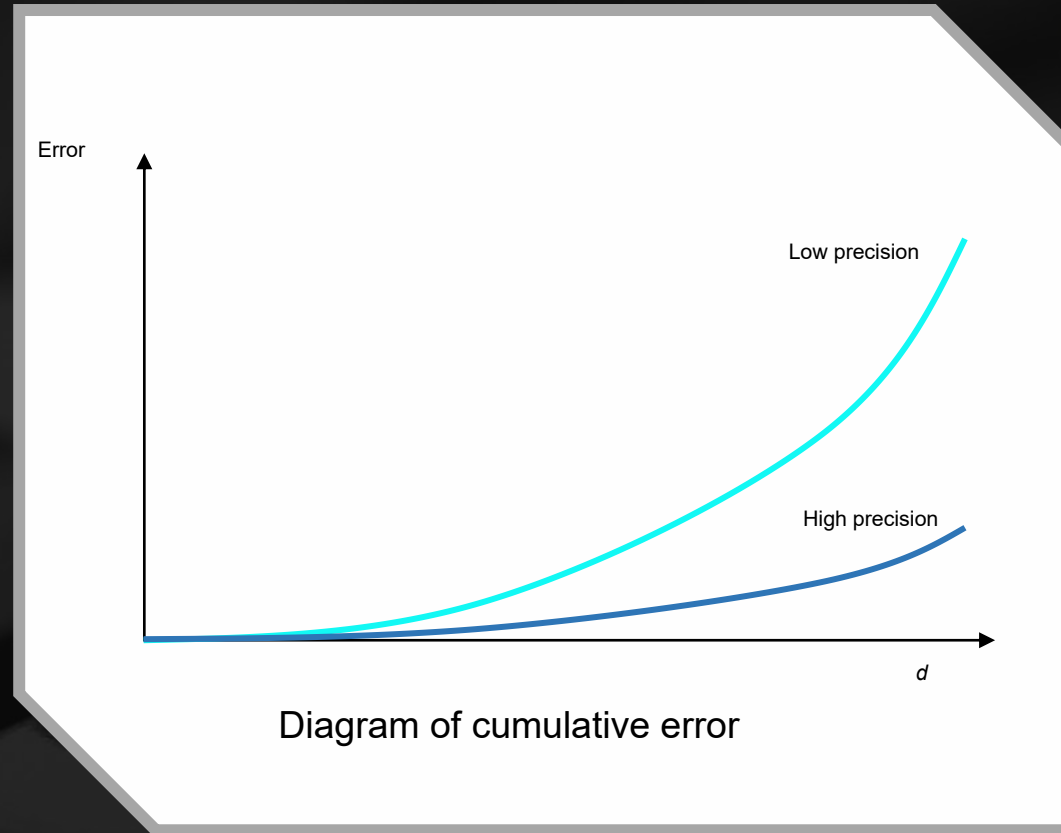

- Independently developed
- Reduce the cumulative error



Built-in SSD

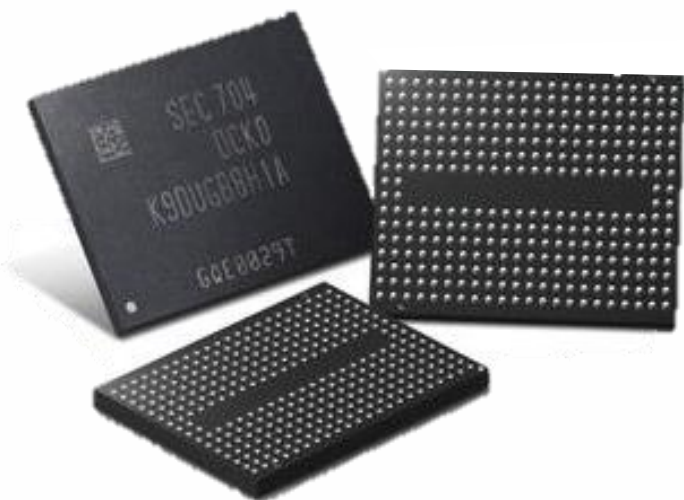


Capacity: 512GB

Write speed: 250~280MB/s


Read speed: 300~350MB/s

Endurance : 2000 +


- Data storage is more secure, stable, and the data transmission speed is higher
- Support direct high-speed data copy when SLAM2000 is shut down

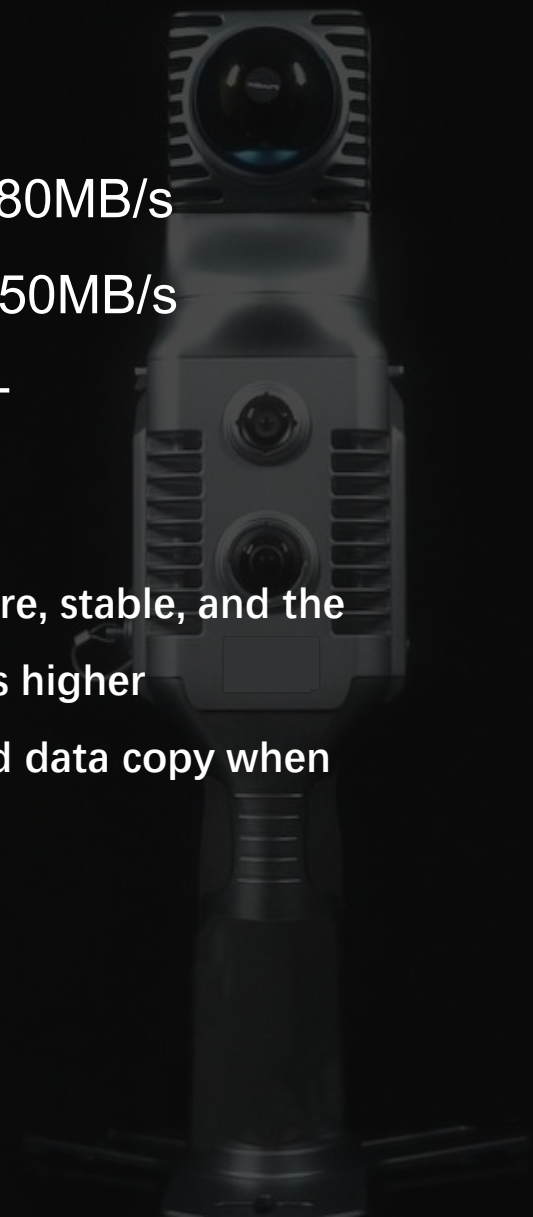

Real-time mapping

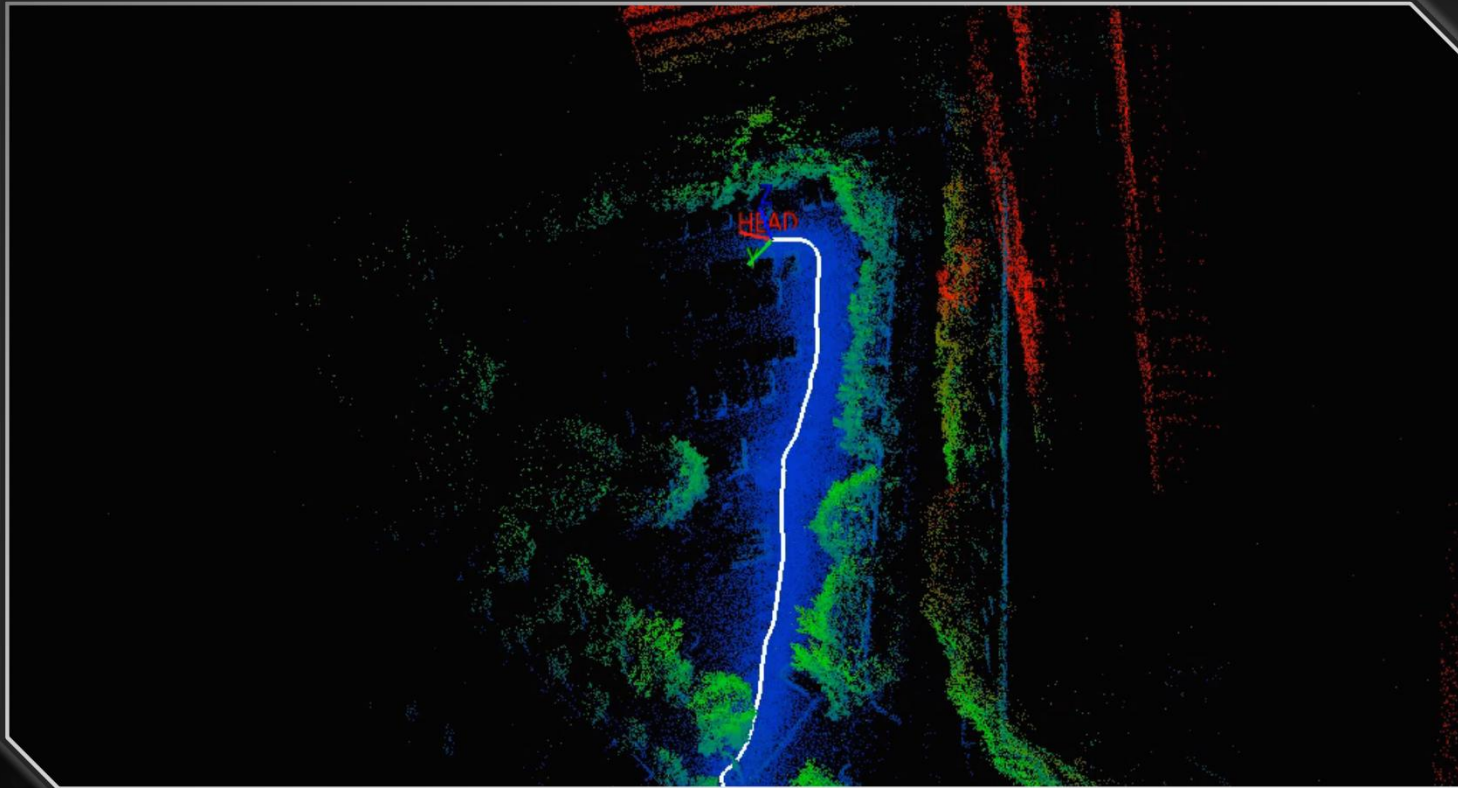

Based on the integrated high-performance computing unit, SLAM2000 can be real-time mapping. That is, map construction is in the process of data collection, and directly output the result data after data collection. More suitable for emergency rescue and other application scenes requiring the timely results.


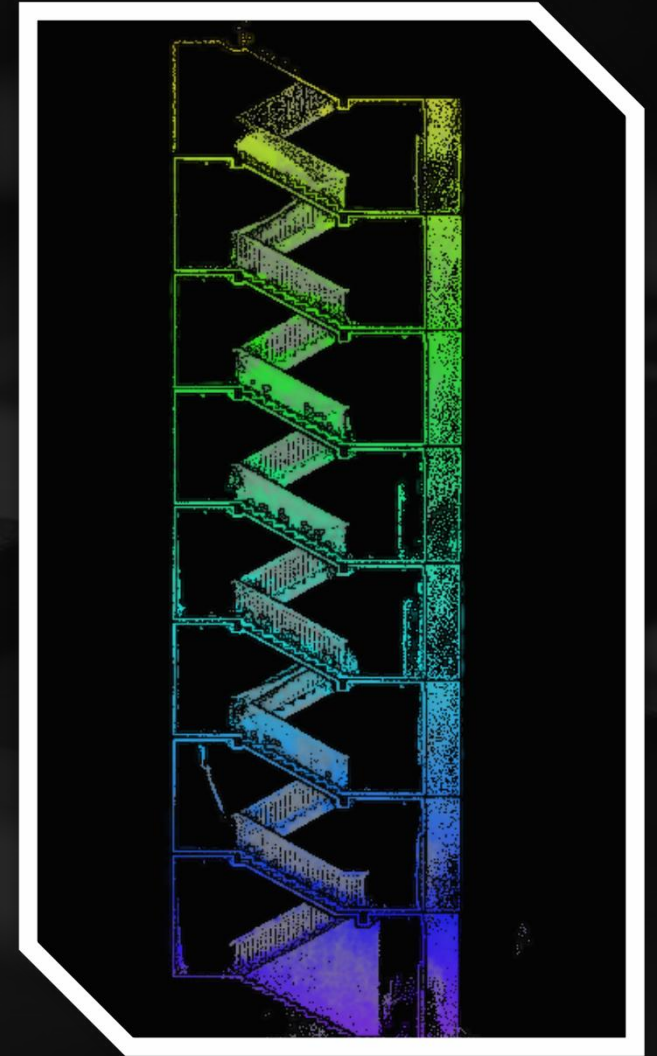


Real-time data of multi-story building

Software





SLAM GO

- Mobile APP
- Project management
- Parameter setting
- Real-time data display
- Firmware upgrading
- Maintenance

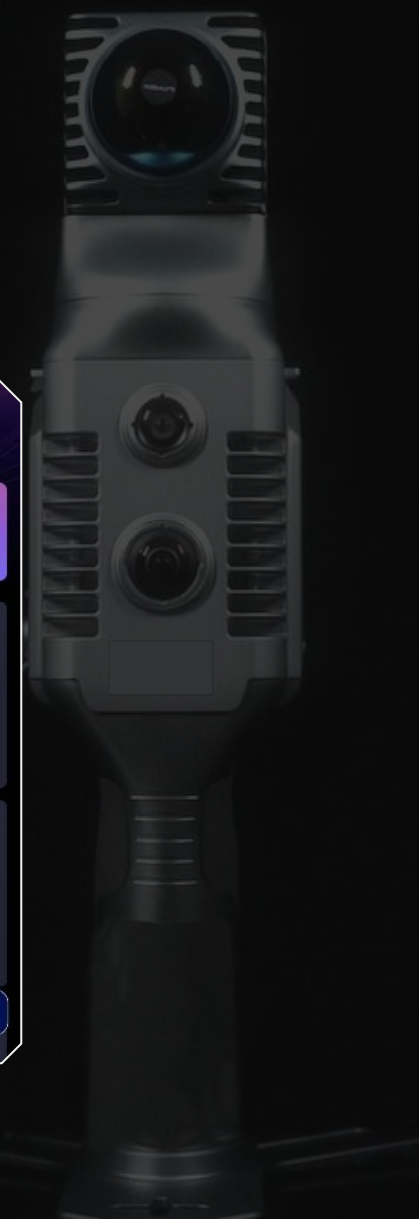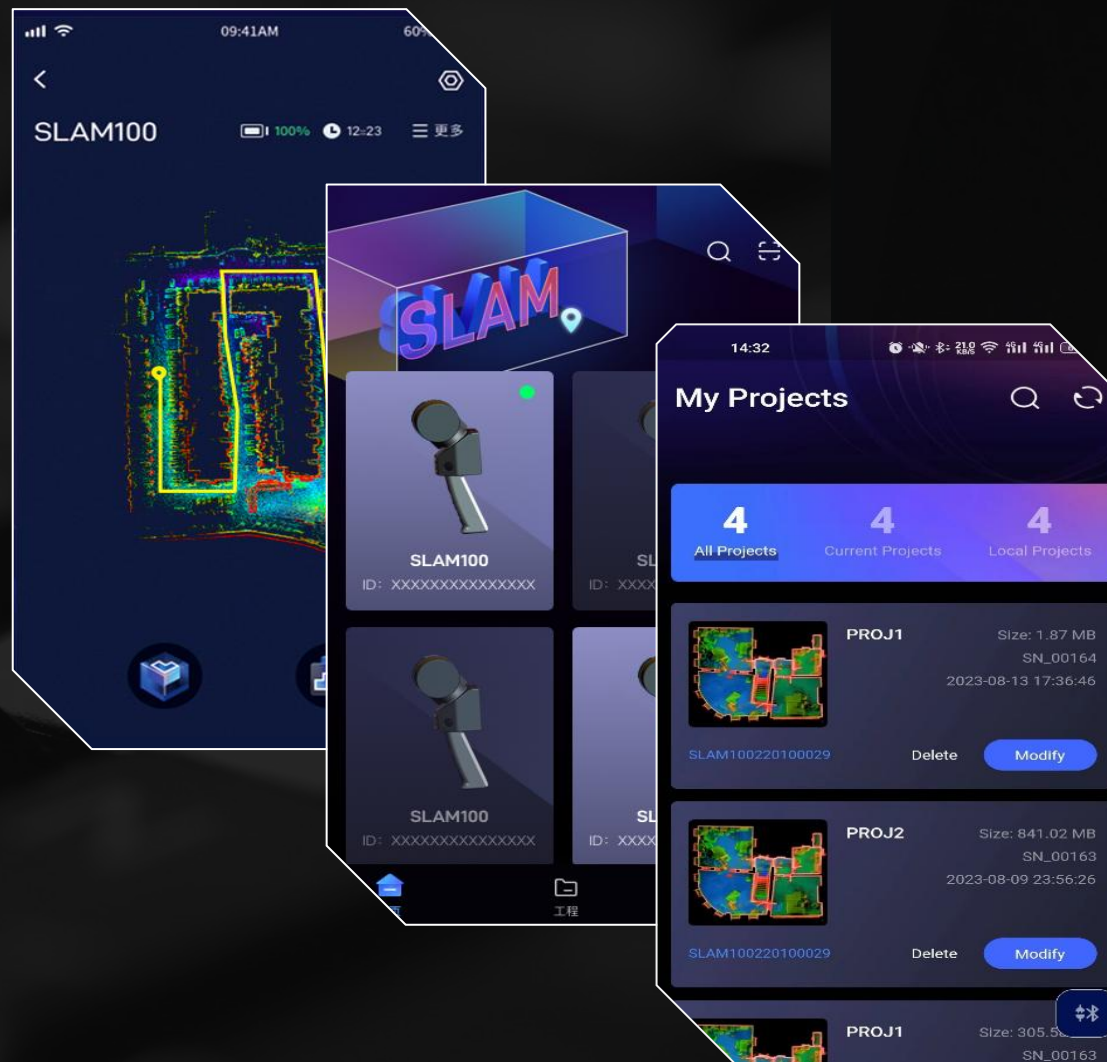

SLAM GO POST

- PC software module
- Data post processing
- One-button slam mapping
- Point cloud coloring
- Point cloud browsing
- Data editing
- Data optimization
- Panoramic image generation

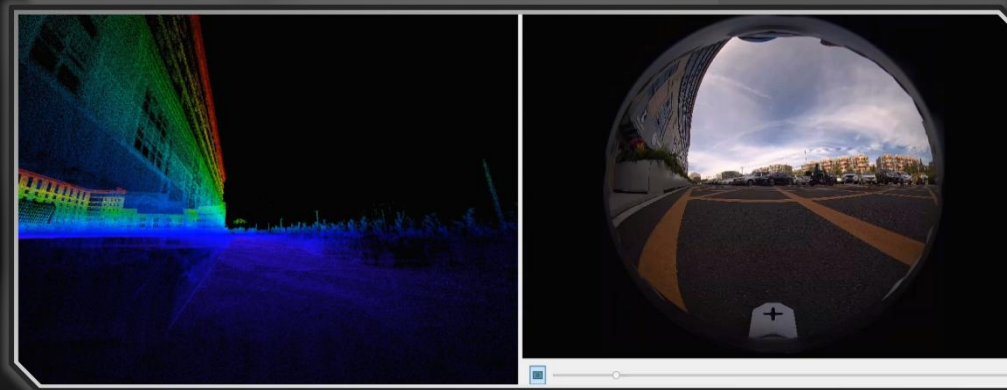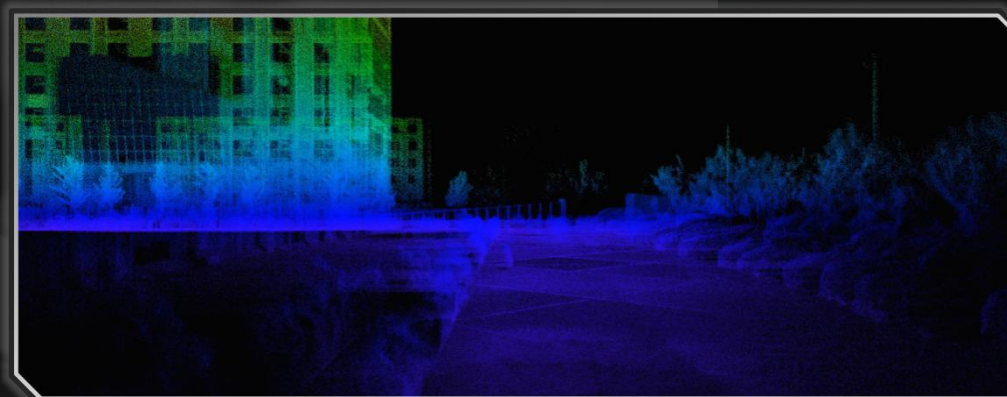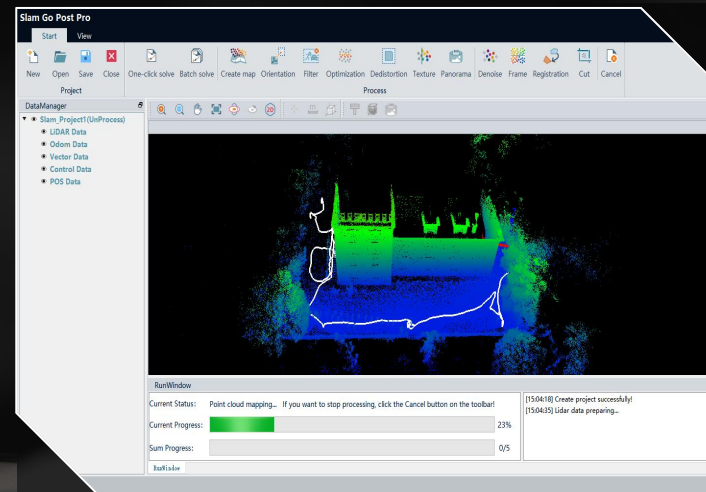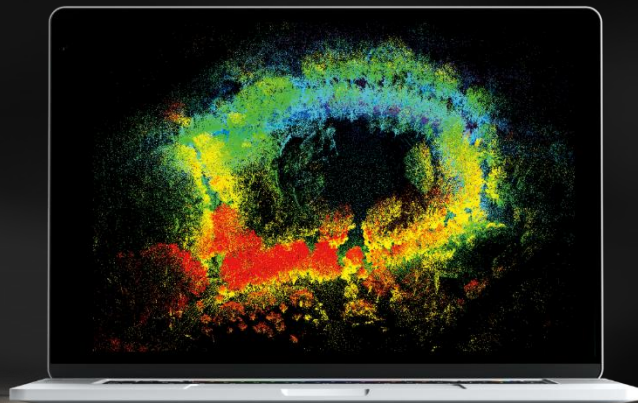

Methods for use



handheld



RTK



backpack



Static station



High precision coloring



Handheld mode



Handheld mode



Handheld mode



Static station mode

COMPARISON BETWEEN SLAM100 AND SLAM2000

	Range	Point frequency	Spot size	Camera	Battery	Weight
SLAM100	120m	320kHz	Smaller	5Mp x 3	18650 lithium battery x 4	1928g
SLAM2000	70m	200kHz	Small	12Mp	Intelligent battery handle	1450g

	Handheld	Airborne	Vehicle mounted	Extended pole	Static station	RTK	Backpack	Real-time mapping
SLAM100	√	√	√	√	x	√	√	x
SLAM2000	√	x	x	√	√	√	√	√



SLAM100

- Long range scanning (120m)
- High-precision data acquisition for both indoor and outdoor large scenes;
- Supporting airborne and vehicle-mounted data acquisition;
- Suitable for indoor and outdoor modeling, power line inspection, earthwork survey, topographic survey, landscape, forestry and other scenes

SLAM2000

- Short range scanning (70m);
- Focus on indoor high-precision data acquisition;
- Small outdoor scene data acquisition;
- Small cumulative error, more evenly distributed point cloud and better coloring effect;
- Suitable for indoor and outdoor modeling, earthwork survey, reverse engineering of large structures, landscape, forestry, etc.
- Real-time mapping, more suitable for emergency rescue;
- Not suitable for power line inspection and high building data acquisition;






Applications



ARCHITECTURE - 2023 INTERGEO

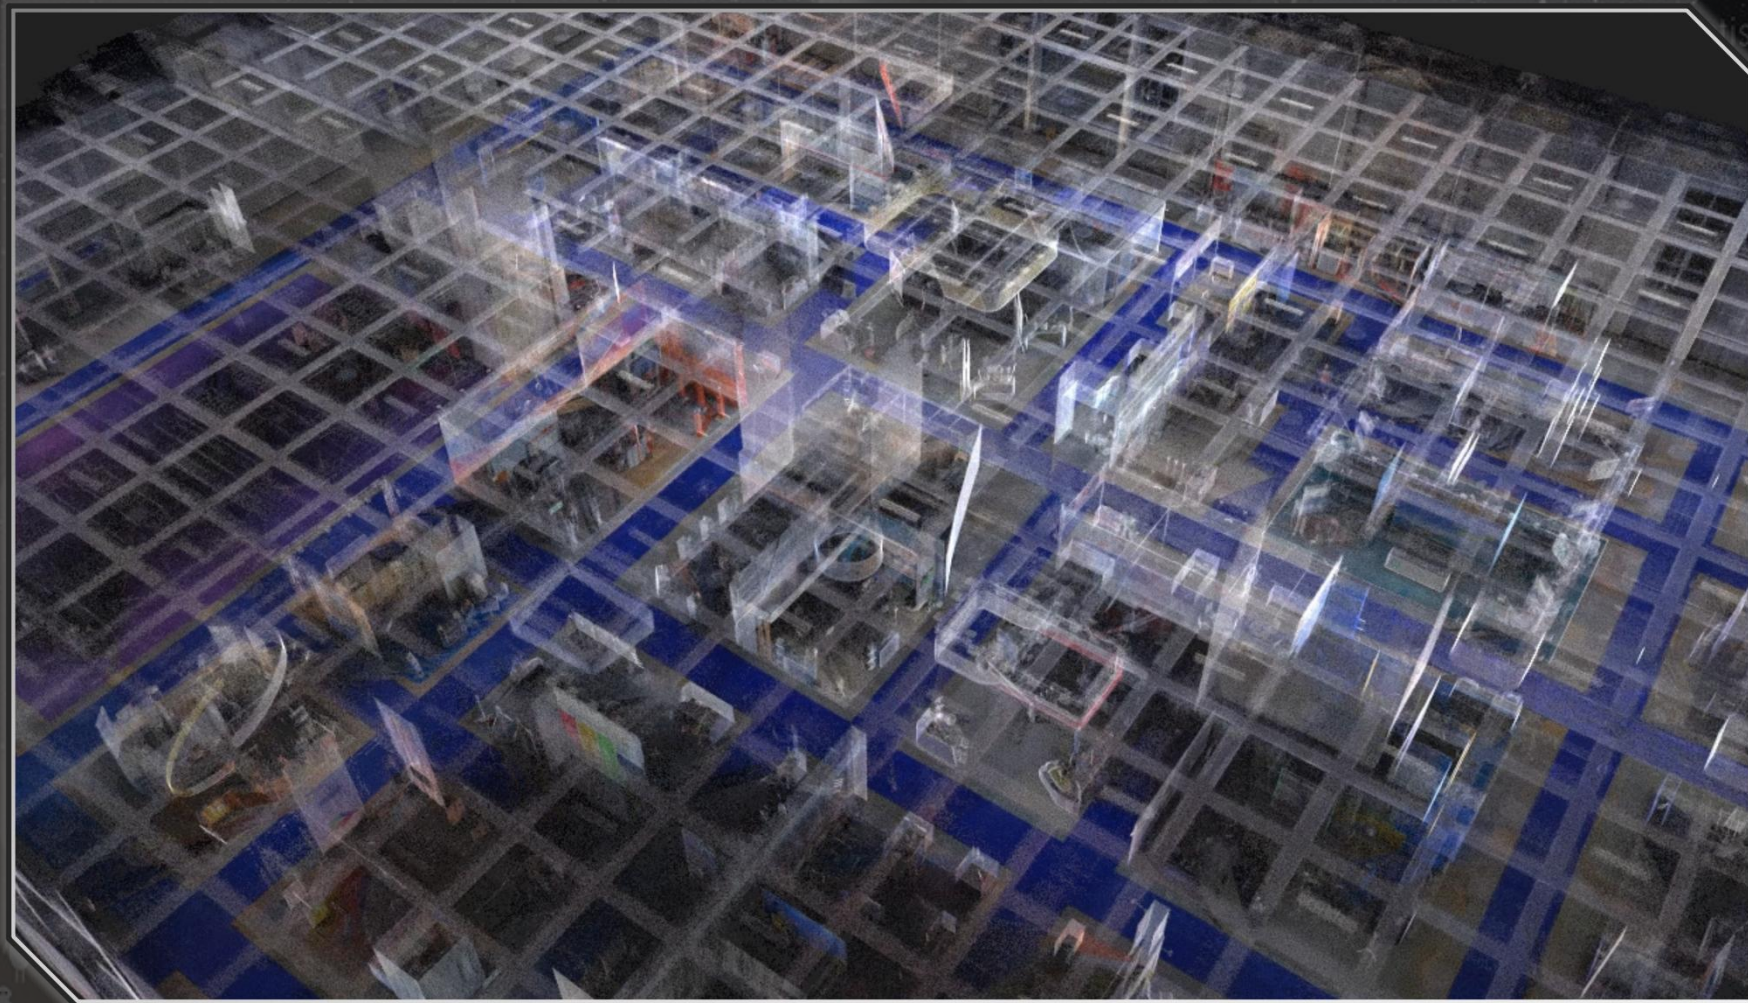

Analytics

Analytics

GARAGE



Analytics




CS




GARDEN



Analytics

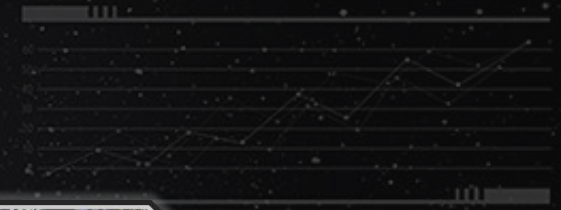

ICS

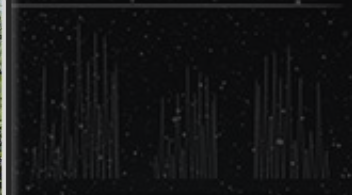


PARK

Analytics



ICS

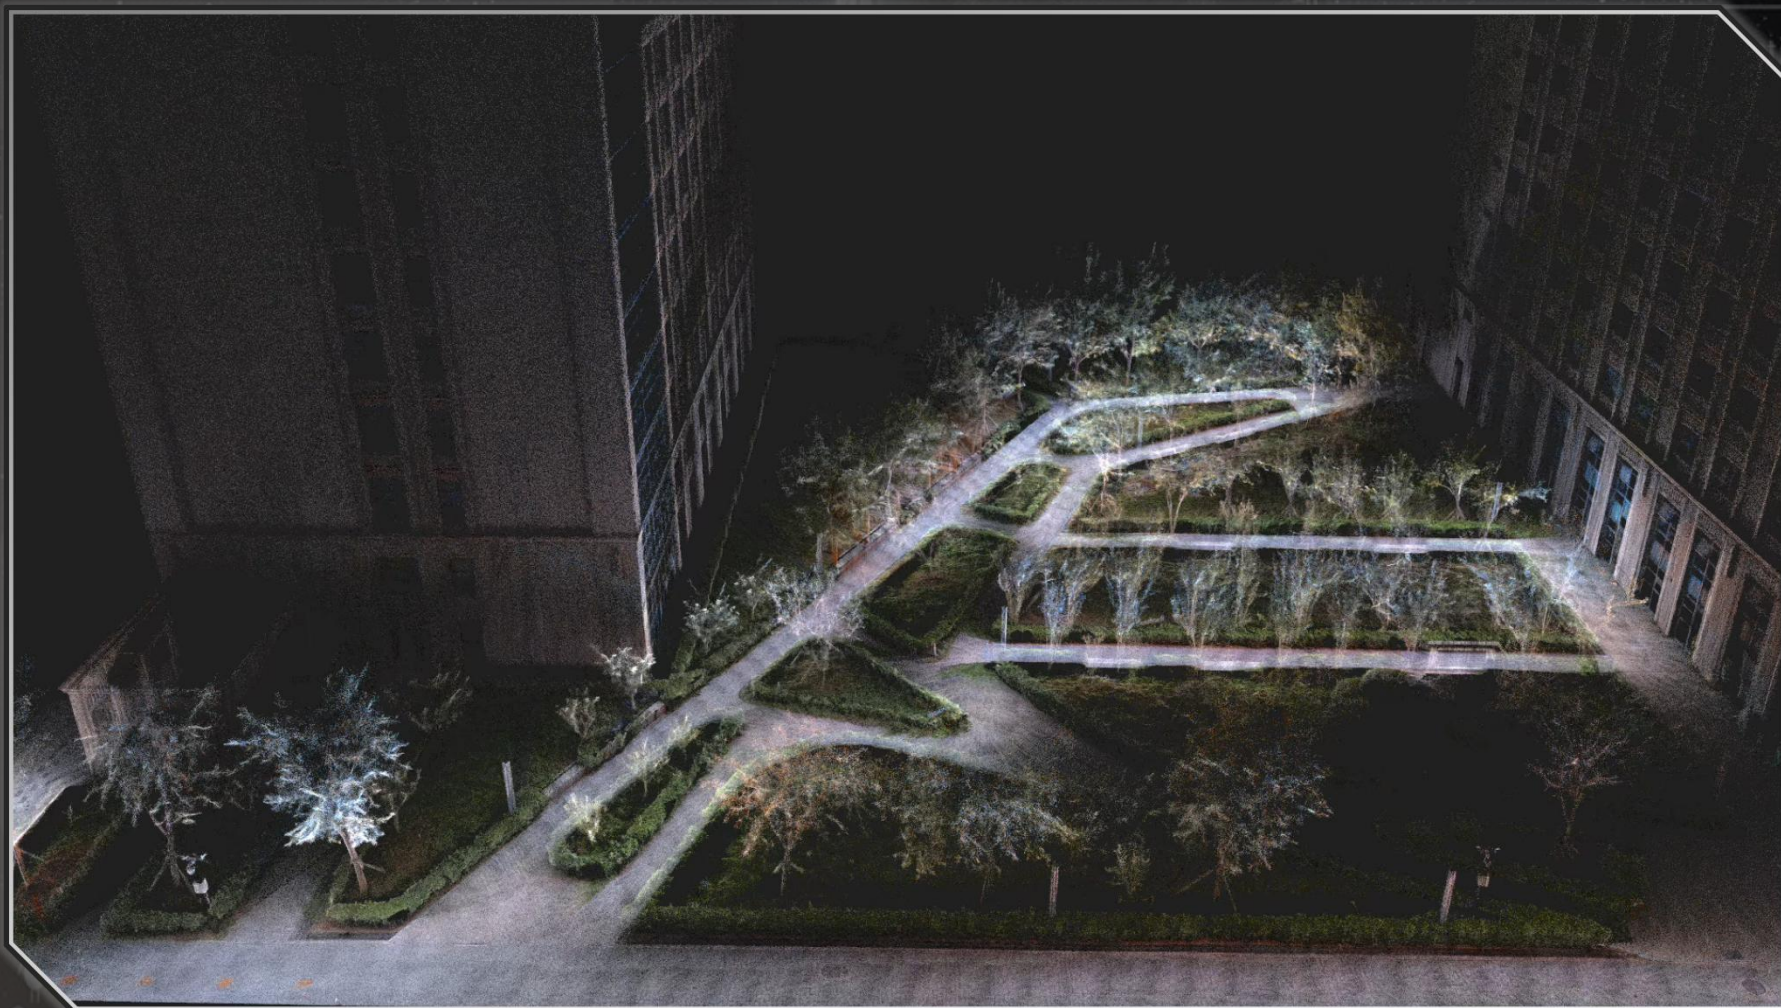


STREET & BUILDING




Analytics



Statistics

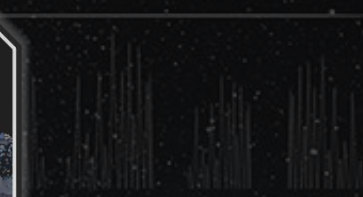

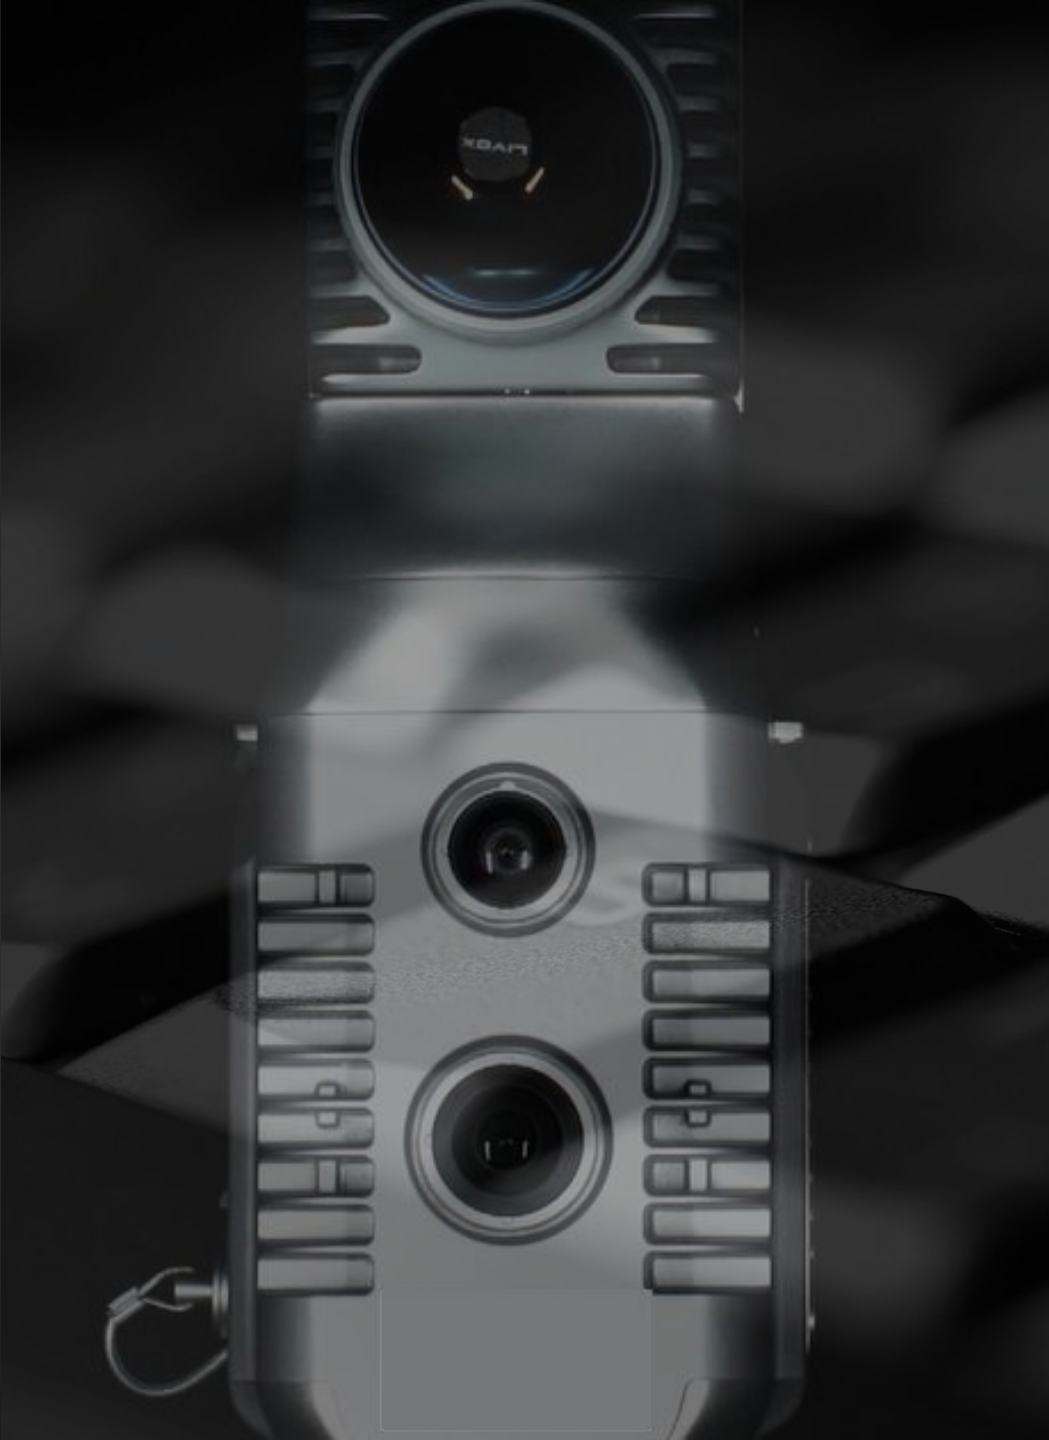

Thank you

