

SAFETY LOCKOUT/TAGOUT SOLUTIONS



... assist in your risk reduction efforts to comply with: ANSI/ASSP A244.1-2026 (R2020)
“The Control of Hazardous Energy Lockout, Tagout & Alternative Method”

The emergency stop buttons shown below are not energy-isolating devices. They are based on your risk assessment, a very viable risk reduction solution that goes beyond your normal emergency stop button, as they have an integrated interlock built into the switch. 3.25 Risk Reduction Measures and 3.26

Safeguards reference safeguarding devices, including interlock and stop devices. 5.8 Control Integration references safety interlock system as well Table 1 – The Hazard Control Hierarchy list Risk Reduction Measures (Guards, Safeguarding Devices) as the number to option to Elimination or Substitution.

Access Control w / Interlock



Request to access with integrated interlock.

22mm Interlocking E-Stop




Can fit into all existing 22mm E-stop button openings.

Trapped Key Interlocking



Safety switch and key transfer system for safeguarding protective devices.

Interlocking E-Stop

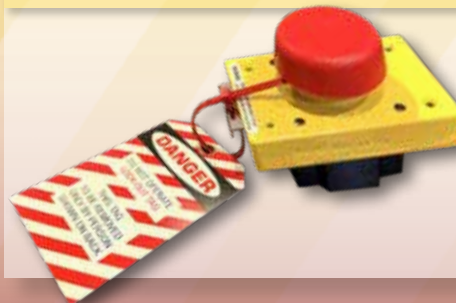

Oversized, robust.

Oversized Mushroom Head



2.25in mushroom head with integrated interlocking device.

Interlocking Solution



Uses bolt detection device with the ACOTOM technology process, guarantees a contactless connection with a type 4 coding. Axkef RFID coding system.

30mm Emergency Stop



Heavy duty with integrated interlock.

Start – Emergency Stop



Heavy duty with integrated interlock.



Brian T. Thomas
President

Specializing in
Industrial Safety - Automation -
Control Solutions

MACHINERY - ROBOTICS - AMR -
EV CHARGING - CONSULTING

1500 S. Sylvania Avenue, Suite 104 • Sturtevant, WI 53177
(262) 456-0927 • cell: (414) 719-4771

BrianT@IndustrialSafetyControls.com • IndustrialSafetyControls.com



SAFETY WIRELESS SOLUTIONS

SAFETY RATED:
SIL Level 3 / Cat 4 / PLe

RE6900 Enabling Switch

DOLD 



Up to 100
meters range.

RE6900 E-Stop

DOLD 



Up to 100
meters range.

UH6900 Group Mode


DOLD 



Up to a 300 meter indoor range
and an 800 meter outdoor range,
and for up to 255 receivers.

UH6900 Pair Mode

DOLD 

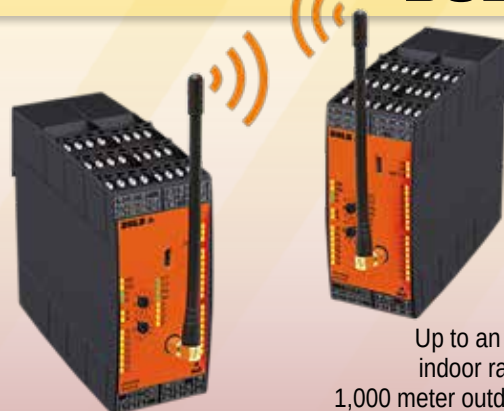

Up to an 800 meter
indoor range and a
1,000 meter outdoor range.

Wireless E-Stop w/ Controls

COMHAND
HANDS-FREE



Up to a 100 meter range.
Incorporates 4 additional non-safety
wireless control signals.

Wireless E-Stop SecurHand

COMHAND
HANDS-FREE



Enhanced operator protection.



Brian T. Thomas
President

Specializing in
Industrial Safety - Automation -
Control Solutions

MACHINERY - ROBOTICS - AMR -
EV CHARGING - CONSULTING

1500 S. Sylvania Avenue, Suite 104 • Sturtevant, WI 53177
(262) 456-0927 • cell: (414) 719-4771

BrianT@IndustrialSafetyControls.com • IndustrialSafetyControls.com

