
Restoring the Crossbar

Whether late for an appointment, (or a tee time) chances are you will knock the screen out of its track at least once.

Our products are designed to release from the track should they be accidentally bumped with your car, golf cart, etc. If this should occur, stop immediately, and pull your vehicle away from the screen. Inspect both the track and screen. If there is no visible damage, it should roll up and back down (repairing itself). If it will not roll up, call your SKEET'R BEAT'R Authorized Dealer





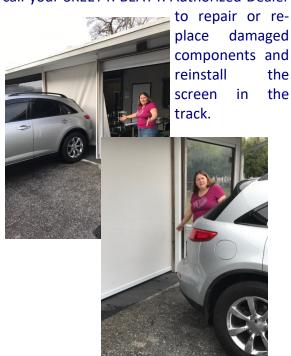



Care and Maintenance

America's #1 Motorized Insect and Solar Protection Systems!





YOUR AUTHORIZED DEALER

Screen Kings 941-961-0935


joseph@luxurygaragescreening.com



7269 W Homosassa Trail Homosassa, FL 34448 352.628.5512 800.764.1110 screenamerica.com

Congratulations on Your Purchase of America's #1 Motorized Insect and Solar Protection System!

After installation you will receive a blue warranty registration card to be filled out by the dealer or yourself. It is important for this card to be returned to Screen America Corporation so that your unit's information can be recorded and registered in our database.



Our standard warranty includes five years on the motor, one year on the balance of the electronics, and a limited life time warranty detailed on the warranty card.

Cleaning the Screen, Housing & Vinyl Components

To extend the life of your system, we recommend using a mild dish detergent mixed with water every 3-6 months (depending on your location) for cleaning your screen, housing, & vinyl components. Apply the solution using a softbristled brush and then spraying the screen (DO NOT SPRAY INSIDE THE MOTOR OR HOUSING UNIT) with a hose until no suds remain. Let the screen dry completely before rolling it up to help prevent mold and mildew. Automotive wax can also be used on the exterior surfaces of the aluminum housing.

"Armor All" or a similar product can be applied to the vinyl portions of the track assembly and/or the vinyl vee-seal to help keep them from drying out, prolonging their functionality.

Contact your Screen America Certified Dealer to see if they offer a maintenance program that suits your needs.

Lubricating the Tracks

We recommend using a non-petroleum based silicone to lubricate the track assembly.



With the screen up, spray the section of track that the screen is retained in. Roll the screen down, then spray the edge of the screen where it contacts the track. Let dry and any "sticking" should disappear. Depending on your location, this process should be performed every 3-6 months.

Additional cans of our SKEET'R BEAT'R Spray Silicone are available from your Screen America Authorized Dealer.