




Product Bulletin

Promix LCD / SD Update for Hino FE 1426 PTO Mode 191211-1

Date:	11/12/19
Topic :	Promix LCD / SD Switching to Engage ECU PTO Mode on HINO FE 1426
Software Ver:	Promix LCD – Main 3.0 (For LCD Ver 01 PCB – Main 8.4); Promix SD 1.7

Promix LCD and SD now have the capability to automatically engage ECU PTO mode on Hino FE 1426. In PTO mode the vehicle ECU will maintain engine RPM regardless of engine load.

(Photo – Using the Promix Universal Main Vehicle Harness White Connectors)

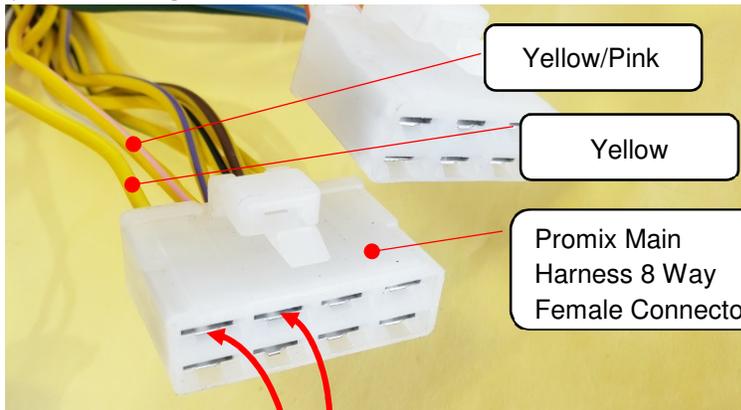

Yellow/Pink – Connect to fused +24v supply

Yellow – Switched +24v to Red/Black wire of vehicle PTO connector

Relay contacts within the Promix console join the Yellow/Pink and Yellow wires when analog revs control is selected and appropriate lockouts are active. Maximum load for this circuit must be below 60w.