

LC-TC5044

UNIVERSAL CONTROLLER

TEMPERATURE HUMIDITY PRESSURE CARBON MONOXIDE & CARBON DIOXIDE & TIME SCHEDULING

DESCRIPTION

The LC-TC5044 is a programmable controller that does not need to be programmed. It has pre-programmed blocks for temperature, humidity, pressure, flow, CO & CO₂.

The LC-TC5044 has 40+ pre-programmed function blocks. It is only necessary to scroll through the functions and select one. The controller is then programmed. The default program (001) is 2 Stage Reverse Cycle. This is also used for 1 Stage Reverse Cycle.

Any parameter of the program can also be changed, e.g. : proportional bands, relay on and off points, PWM rates, PI & PID functions, etc.

Inbuilt Timeclock with User Friendly programmable 7 - day time schedule and programmable holidays (default holidays pre-programmed except variable holidays each year).





The Timeclock can be enabled on Menu 25 / 26 with the ability of programming the 4 relays and 3 analogue outputs independently. It can also operate as a stand-alone Timeclock. The controller is housed in a 4 DIN module 70 x 88 x 62 mm enclosure. It comes with its own DIN rail mount or can be mounted on a standard 35mm DIN mounting rail. The LC-TC5044 controller has a 2 x 16 character LCD display with white backlighting, 4 x blue relay status LED's and 3 push button's for INCREASE, DECREASE & SELECT.

The controller will operate with 1K, 2K and 10K NTC thermistor sensors and existing Regulator remote setpoints. It will also operate with PTC 1K Nickel and 1K Platinum sensors. The default is the 10K thermistor sensor. Up to 4 Smart Sensors can be connected to the controller. The controller will accept 2 or 3 wire 4 – 20mA / 0-10VDC inputs for Temperature, Humidity, Pressure, Flow, CO and CO₂.

There are 3 analogue outputs, plus one diode protected output of AO3. The analogue outputs are short circuit proof for low voltages. They will even protect against 24vac connected to them. The output will open circuit under fault conditions and will reset when the fault is removed.

There are 4 relay outputs, Relay 1 is a SPCO contact and Relays 2, 3 & 4 are SPNO contacts. The relays are rated at 5A 250VAC. The power supply will operate over the range of 18 – 265V AC/DC. It can power CO₂ sensors and other sensors requiring an external 24VDC power supply. The 24VDC output is available from terminal 1 when operating from a 2 wire 4-20mA or 3 wire 0-10vdc transducer. It can also power small damper and valve actuators directly without requiring an external 24VAC transformer, from Terminal 5.

CONNECTION DIAGRAM

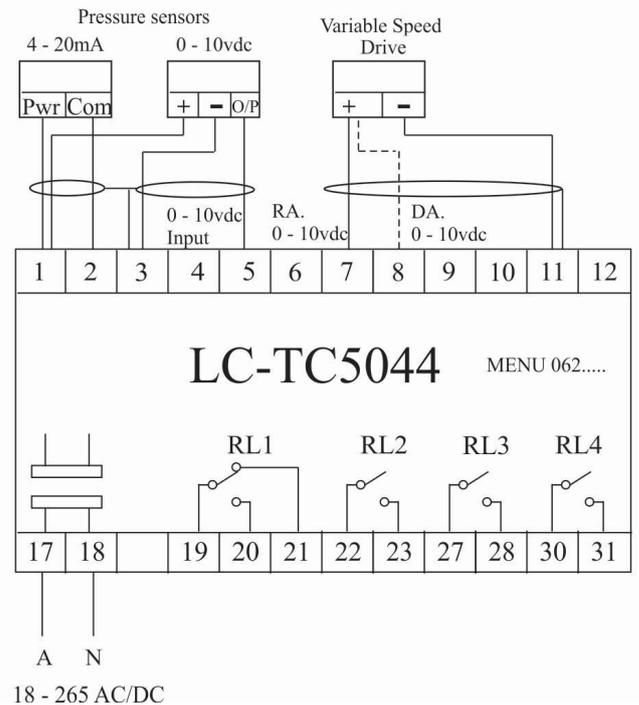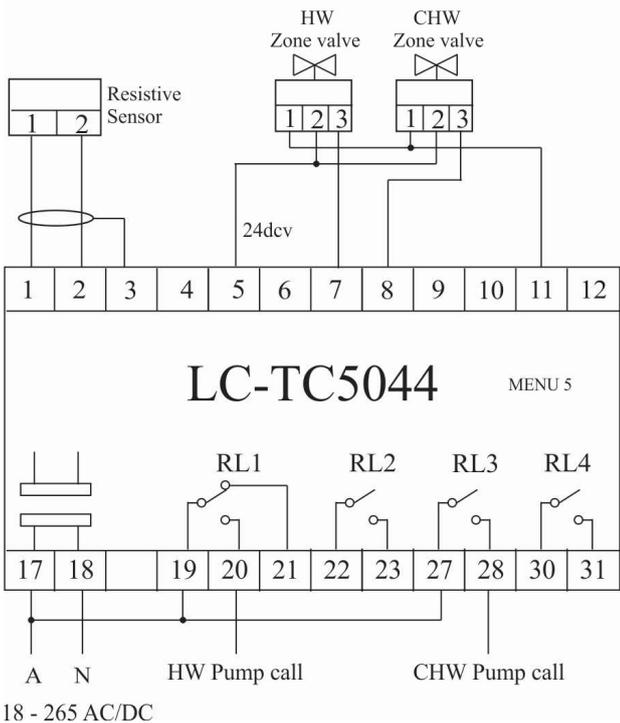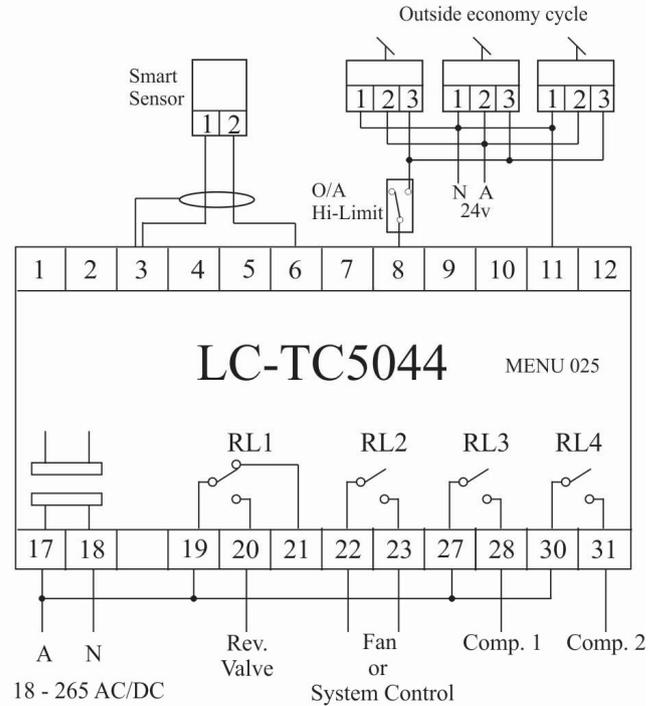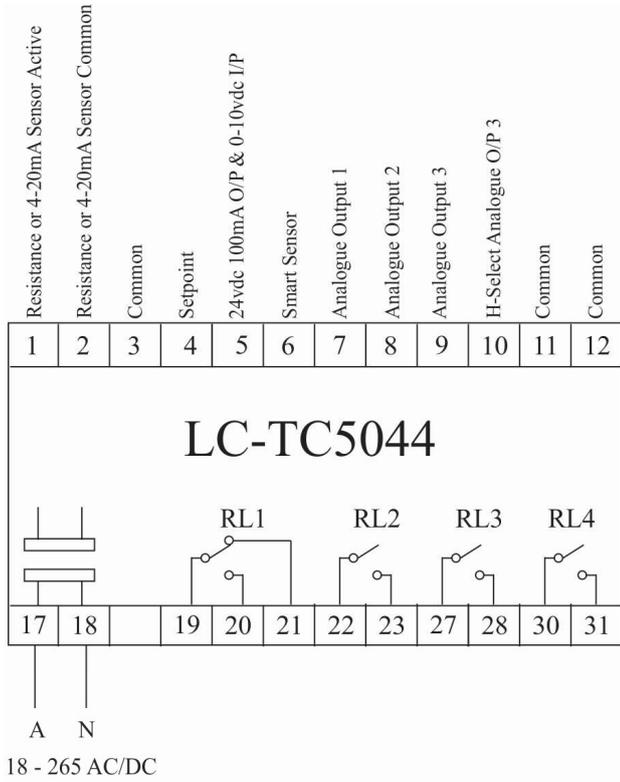

TECHNICAL DATA

ITEM	DESCRIPTION
Supply Voltage	18 -265V AC/DC
Power Consumption	2 W nominal – up to 5 W with external load
Model	LC-TC5044
Ambient Temp Operation	0 - 50°C
Ambient Humidity	Max. 90% RH
Dimensions	L 70 x H 88 x D 62mm
Weight	0.4 Kg
Wiring Terminal Size	4.0 mm ²
Inputs – Resistive Sensors	Thermistor 1K, 2K, 10K, Ni 1000R , Pt 1000R
- Smart Sensors	LC-TR3800, LC-TR3840, & LC-TR3700 (Temp & Humidity)
- 0-10Vdc / 4-20mA Sensors	Humidity, Pressure, Flow, Carbon Monoxide & Carbon Dioxide etc.
Analogue Outputs	AO1, AO2 & AO3 0 – 10Vdc , 10mA Short Circuit Protected AO4 – Diode Protected Output of AO3
Relay Outputs	RL1 SPCO , RL2, RL3 & RL4 SPNO 250Vac 5 A Resistive
24 Vdc Power Supply	Output Current 100mA
Microcontroller	ST Processor : STM32F103ZG 32bit microprocessor 72 MHz ARM Cortex – M3 , 1 Mbyte Flash 96 Kbyte RAM , 12 Bit A/D Converter



New South Wales
The Hub
Unit 6
128 Station Road
Seven Hills NSW 2147
Tel: (02) 9674 3898
Mob: 0418 636 618

Queensland
Unit 4
16 Metroplex Avenue
Murarie QLD 4172
Tel: (07) 3899 1573 or 1300 962 113
Mob: 0455 999 303