



TAYLOR[™]
WITH YOU EVERY STEP[™]

2022 PRODUCT CATALOG



ADVANCED FLOORING SOLUTIONS

CONTENTS

▶ WHO WE ARE

03 WELCOME TO TAYLOR

04 OUR STEPS OF INNOVATION

06 INDUSTRY-LEADING WARRANTIES

07 OUR ASSOCIATIONS

▶ WHAT'S NEW IN 2022

08 COLOR-CODED LABELS PER PRODUCT CATEGORY

08 WHAT TO LOOK FOR ON OUR PRODUCT LABELS

09 PRODUCT COLLECTIONS

SIGNATURE LINE®

11 INTRODUCTION

12 RESOLUTE®

13 PINNACLE®

14 DYNAMIC®

15 STEADFAST®

16 RIDGELINE®

17 IRONWOOD®

18 ASPEN®

19 IRONWOOD GLUE ASSIST®

20 AGILE®

21 VERSATILE®

22 SAHARA®

23 ZEPHYR®

24 ENHANCE®

25 FINALE®

26 ELEVATE™ (NEW PRODUCT)

27 GRAVITY™ (NEW PRODUCT)

28 FLOORING CHART

30 TOOLS CHART

ESSENTIALS LINE

33 INTRODUCTION

34 2062

34 MS-PLUS® ADVANCE

35 TIMBERLINE™

35 2071

36 2049

36 900

37 722

37 710

38 EDGE-LOCK

38 2025

39 TOOLS CHART

40 FLOORING CHART

ADDITIONAL ITEMS

42 2037

42 501

42 2070

42 2055

42 2089

42 757

42 720/720-C

42 775/775-C

42 700

43 901

43 1N/1N-C

43 725

43 18" ROLLER SYSTEM

43 18" ROLLER COVERS

43 TAYLOR SHIELD

43 TAYLOR GUARD

43 ODORGHOST™ +UV

43 ODORGHOST™

▶ RESOURCES

44 PACKAGING AND SHIPPING CHART

46 TAYLOR ONLINE

47 TAYLOR TIME

48 TAYLOR TECHNICAL SERVICES


50 MORE THAN A SUNDRY

51 LEADING THE INDUSTRY



WELCOME TO TAYLOR

At TAYLOR we are proud to be one of the flooring industry's most trusted brands. From our roots as a carpet installation adhesive company over 40 years ago, Taylor now manufactures a complete line of innovative adhesives for a wide range of flooring types. We also provide coatings that mitigate moisture transmission and a variety of other specialty installation products. But, what really sets us apart is our focus on the success of our customers. We live this out through our brand promise of being With You Every Step™.

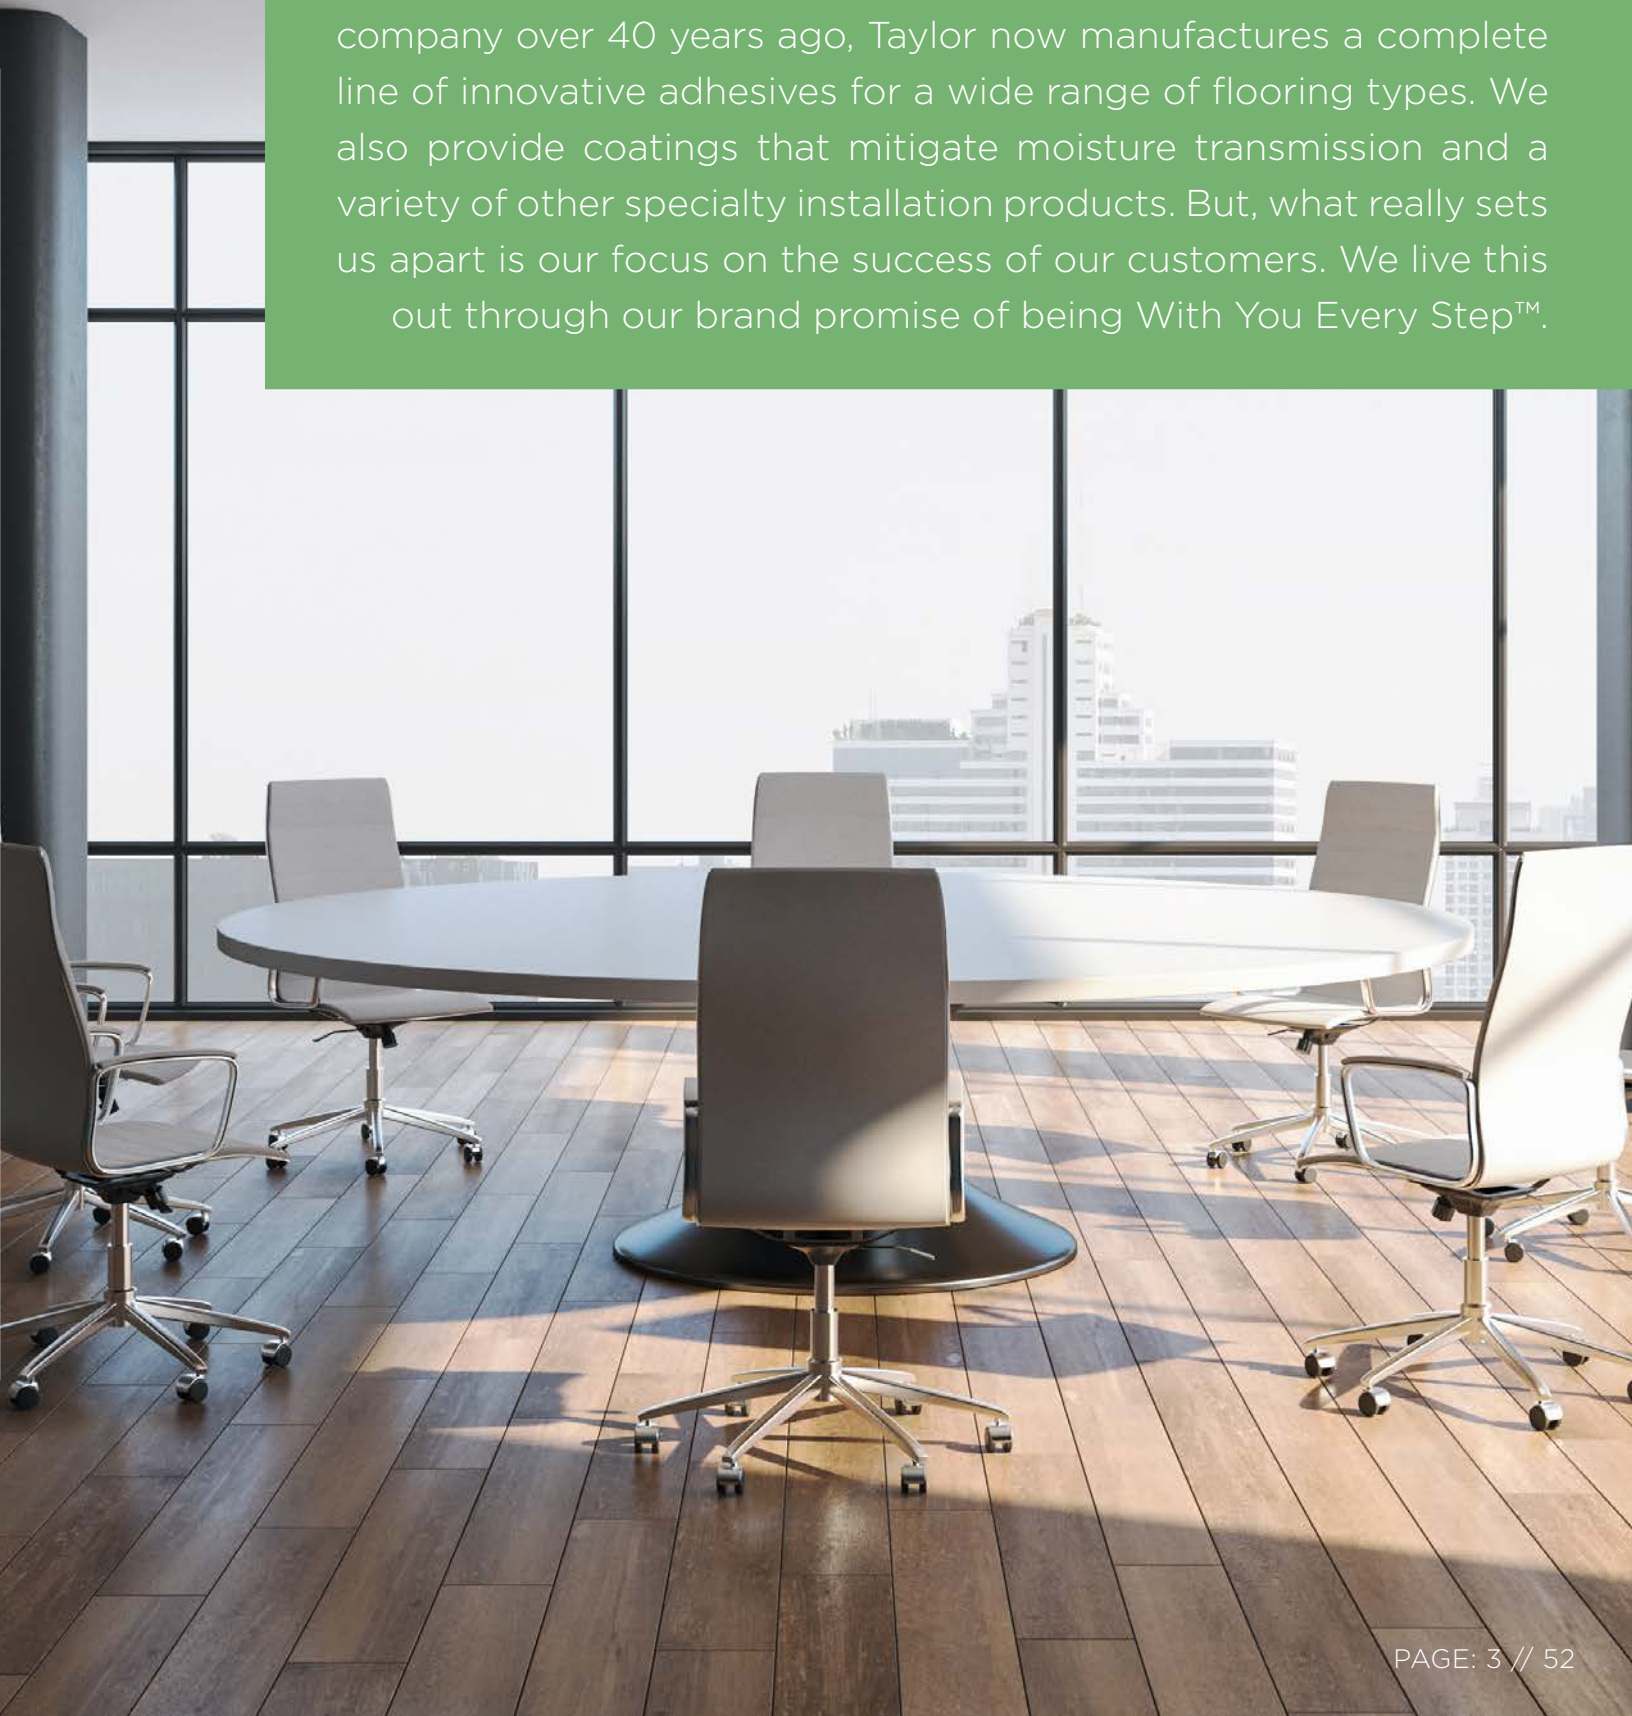

OUR STEPS OF INNOVATION



Wally Taylor started W.F. Taylor as a carpet adhesive supplier

1977



First flooring adhesive certified by CRI Green Label Plus®

1991



Introduced Meta-Tec technology with a superior cross-linking system, achieving high-shear strength and a waterproof bond

2001



First flooring adhesive certified by Greenguard®

2007



Earned USDA BioPreferred® certification

2008



First flooring adhesive certified by FloorScore®

2013



1989

Launched Envirotec Healthguard adhesive technology



1989

Developed the first solvent-free flooring adhesive in the U.S.



1995

Chosen by the EPA as the exclusive adhesive for their new headquarters building



2006

Launched MS Plus with Meta-Tec for safer and easier wood installations - solvent and isocyanate free



2008

Introduced MS Plus Advance, the most innovative wood flooring adhesive with moisture and sound control



2014

First flooring adhesive certified by Cradle to Cradle™



KEY




TAYLOR MILESTONES



CERTIFICATION FIRSTS



TECHNOLOGY FIRSTS

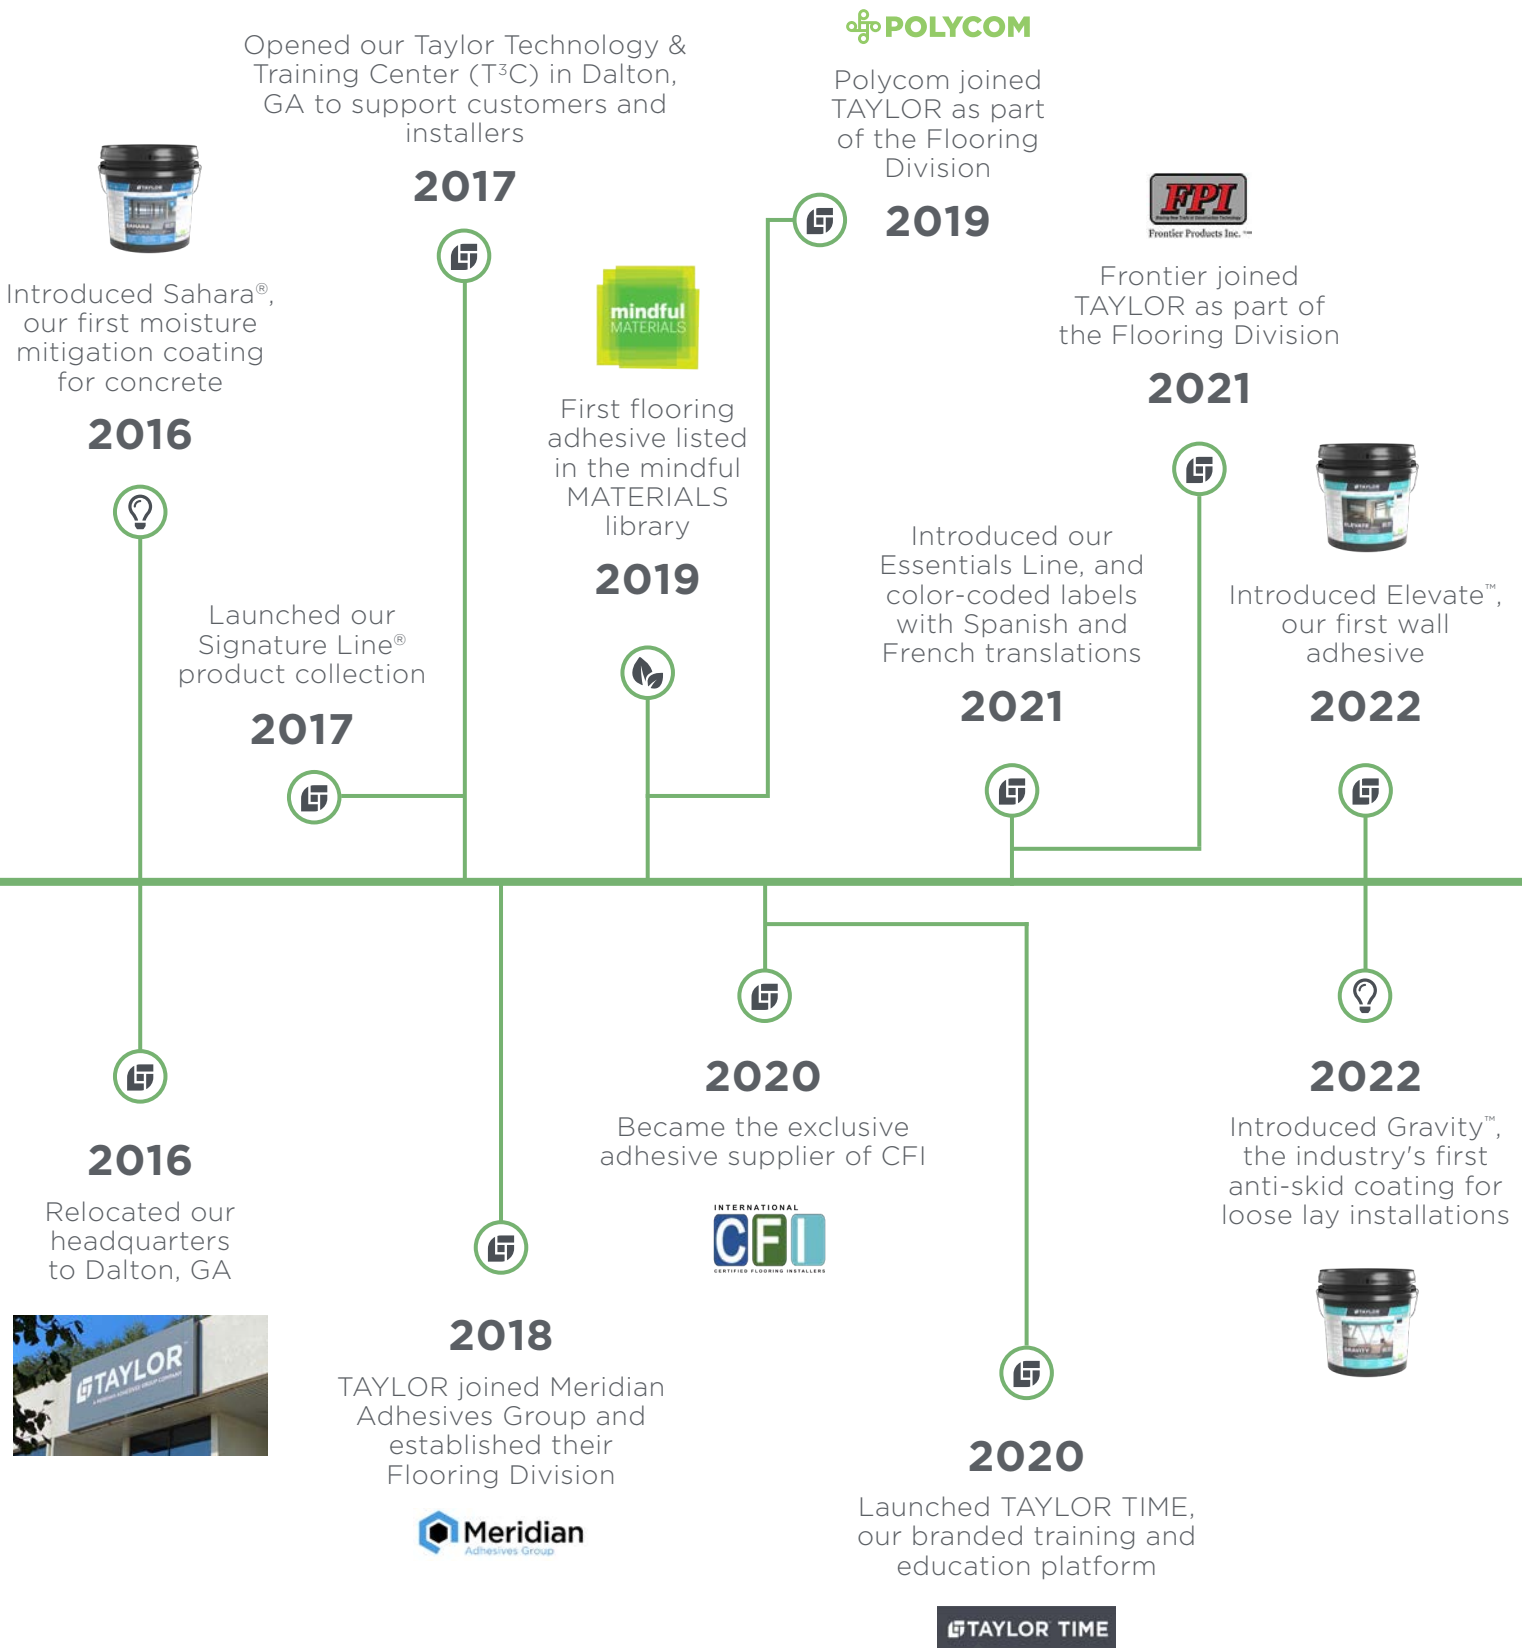

Industry-Leading Warranties

At TAYLOR, one of the ways we are With You Every Step™ is through the performance of our products. Our industry-leading warranties protect you against bond failures, de-lamination from elevated moisture, and even topical liquids*.



OUR PERFORMANCE WARRANTIES COVER†

	<u>Non-CFI Installer</u>	<u>CFI Certified Installer✓</u>
✓ Replacement floor covering material	10 years	Lifetime
✓ Replacement TAYLOR product(s)	10 years	Lifetime
✓ Labor costs to repair/replace	10 years	Lifetime

Our Associations

At TAYLOR, we are active in supporting many well-respected industry associations and groups. Our goal is to help further their growth and service throughout the industry. We would like to thank them for supporting us in return.




Founded in 2020, The Taylor Advisory Council advises us on ways to improve our products and services. This valuable feedback allows us to be more responsive to all of our industry partners.



WHAT'S NEW IN 2022

COLOR-CODED LABELS

Our new color-coded labels allow easy identification of each products' primary usage category.

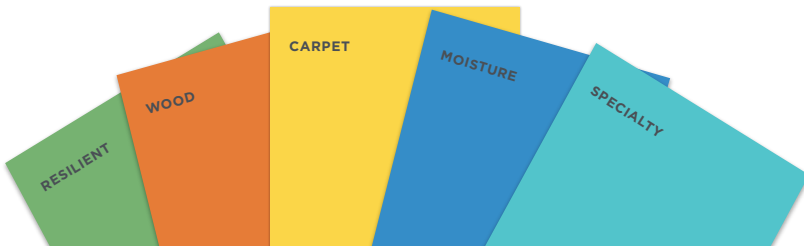

Look for the **PRODUCT CATEGORY KEY** on all our products!

PRODUCT CATEGORY KEY	
● RESILIENT	● MOISTURE
● WOOD	● SPECIALTY
● CARPET	This product can be used with circled categories (see Technical Data Sheet)

WHAT TO LOOK FOR ON OUR PRODUCT LABELS

SIGNATURE LINE®

- ① Signature Line® Band
- ② Where to Use Band
- ③ Label Photography
- ④ Moisture Protection Bar
- ⑤ Low Odor Badge
- ⑥ App QR Code
- ⑦ Product Benefits
- ⑧ Data Icons
- ⑨ Approved Tools
- ⑩ Certifications
- ⑪ Product Category Key
- ⑫ English, Spanish, French



PRODUCT COLLECTIONS

Our three product collections make it easier to recognize, specify, inventory, sell and use our products.

- 1 SIGNATURE LINE®**
As our flagship collection, the Signature Line® has redefined industry expectations for adhesive technology, sustainability, and Indoor Air Quality (see pages 10-31).
- 2 ESSENTIALS LINE**
As our newest collection, the Essentials Line upholds the same exacting quality and proven performance TAYLOR products are known for (see pages 32-41).
- 3 ADDITIONAL ITEMS**
As our third collection, these additional items offer unique solutions to get the job done professionally (see pages 42-43).

ESSENTIALS LINE

- 1 Where to Use Band
- 2 Moisture Protection Bar
- 3 Essentials Line Title
- 4 Low Odor Badge
- 5 App QR Code
- 6 Product Benefits
- 7 Data Icons
- 8 Approved Tools
- 9 Certifications
- 10 Product Category Key
- 11 English, Spanish, French





SIGNATURE LINE®

Welcome to the most advanced line of flooring adhesives and coatings available in the industry. Ranging from residential to heavy commercial applications, these high-performance, user-friendly, one-part products are designed to save time and money, all while being low VOC and low odor.

This premium collection is formulated with no solvents or isocyanates, making them safer and easier to use. Our dedication to Indoor Air Quality and a healthier environment for both installers and occupants is reflected below:



SIGNATURE LINE® SUSTAINABILITY

Certified by:



Listed in:



Gold member of:



LEED v4 contributing:



RESOLUTE®

SIGNATURE LINE®

UNLIMITED MOISTURE VAPOR BARRIER,
HARD-SET, ELASTOMERIC ADHESIVE

Available in 2 gallons



Chasing moisture can cost valuable time and money, but with **Resolute**, you can stop it in its tracks. Designed with safe, single-part, moisture-cured chemistry, Resolute is a faster, more installer friendly alternative to two-part epoxy systems. Resolute is engineered for heavy rolling loads and challenging environments, and its waterproof design forms an unlimited moisture vapor barrier that can also take the punishment introduced by topical liquids.

WHY USE

- Unlimited moisture protection (see TDS)
- Cost savings potential
- No moisture or pH testing required
- No sub-slab moisture barrier required (see TDS)
- Topical liquid resistance (water, spills, etc.)
- Permanent, waterproof bond
- 1-step installation (no stirring/mixing)
- Self-healing, elastomeric membrane
- Excellent plasticizer migration resistance
- Faster construction timeline
- 6-hour cure (heat weld, wet mop, strip/finish)
- Rapid occupancy times
- Extreme heavy rolling loads
- Installs multiple flooring types
- Sound control (IIC, STC)
- Low VOC, extremely low odor
- Antimicrobial technology

NOW
FEATURING
NO TESTING



COST SAVINGS POTENTIAL

Skip Testing: Can save \$0.15/ft² by not having to moisture or pH test

Start Installing: Save days or weeks by avoiding costly construction delays

Save \$4-5/ft² by not having to bead blast, skim coat, or use a 2-part epoxy system

Savings are based on an estimated national average and may vary based on location and job site.



RH
NTR*
100%



PH
NTR*
5-14



MVER
NTR*



OPEN
TIME
0 MIN



WORKING
TIME
45 MIN



CURE
TIME
6 HRS



LIGHT
TRAFFIC
3 HRS



HEAVY
TRAFFIC
4 HRS



ROLLING
LOADS
8 HRS



ΔIIC
18 dB**

PINNACLE®

WHY USE

- Aggressive tack, fast grab
- High moisture tolerance
- Permanent, waterproof bond
- High-strength, elastomeric bond
- Ideal for heavy rolling loads
- Immediate access for light traffic
- Installs multiple flooring types
- ColorReady® technology
- Excellent plasticizer migration resistance
- Low VOC, extremely low odor
- Antimicrobial technology

SIGNATURE LINE®

HARD-SET, TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

Available in 1 and 4 gallons

Pinnacle goes above and beyond by withstanding severe moisture and alkalinity. Offering the upfront benefits of a PSA, it quickly transitions; fully cross-linking into a hard-set to securely lock your flooring in place. With its aggressive, fast-grab design, Pinnacle handles the pressure of heavy rolling loads with ease.



RH
99%



PH
5-12



MVL
12 LBS



FLASH
TIME
30-60 MIN*



WORKING
TIME
3 HRS*



CURE
TIME
12 HRS



LIGHT
TRAFFIC
0 MIN*



HEAVY
TRAFFIC
24 HRS



ROLLING
LOADS
48 HRS

*Data reference PSA usage only. See technical data sheet for complete details.



DYNAMIC[®]

SIGNATURE LINE[®]

FIRM-SET, MODIFIED TRANSITIONAL PRESSURE SENSITIVE[®] ADHESIVE

Available in 1 and 4 gallons



When it comes to ultimate adaptability for numerous flooring types, **Dynamic** holds the market. Breaking all the rules, this revolutionary product saves time with its instant access for light traffic. Dynamic provides the superior bond-strength of a fully cross-linked adhesive, while temporarily retaining PSA-like surface tack.

WHY USE

- Aggressive tack, fast grab
- High moisture tolerance
- High-strength, water-resistant bond
- Repositionable installation
- Immediate access for light traffic
- Handles heavy rolling loads
- Attractive price point
- Installs multiple flooring types
- 12 hours of working time
- ColorReady[®] technology
- Simple installation
- Elastomeric bond
- Plasticizer migration resistance
- Low VOC, extremely low odor
- Antimicrobial technology



RH
99%



PH
5-12



MVR
12 LBS



FLASH
TIME
30-60 MIN*



WORKING
TIME
12 HRS*



CURE
TIME
12 HRS



LIGHT
TRAFFIC
0 MIN*



HEAVY
TRAFFIC
24 HRS



ROLLING
LOADS
48 HRS

STEADFAST®

WHY USE

- High-strength, water-resistant bond
- Immediate access for light traffic
- Competitive price point
- 24 hours of working time
- Warranted over cutback residue (see TDS)
- Simple installation
- Elastomeric bond
- Handles heavy rolling loads
- Designed specifically for VCT flooring
- Low VOC, extremely low odor
- Antimicrobial technology

SIGNATURE LINE®

CLEAR THIN SPREAD, VCT ADHESIVE

Available in 1 and 4 gallons

Reliability often comes at a price, but with **Steadfast**, the benefits far outweigh the cost. Steadfast changes the game with its ability to handle light traffic immediately after installation. With its strong, water-resistant bond, it gives you confidence that your flooring is secure.



RH
90%



PH
5-9



MVER
8 LBS



FLASH
TIME
30-60 MIN



WORKING
TIME
24 HRS



CURE
TIME
24 HRS



LIGHT
TRAFFIC
0 MIN



HEAVY
TRAFFIC
24 HRS



ROLLING
LOADS
48 HRS



RIDGELINE®

SIGNATURE LINE®

**UNLIMITED MOISTURE VAPOR BARRIER,
ELASTOMERIC ADHESIVE**

Available in 4 gallons



As the peak performer in its industry, **Ridgeline** rises above by offering complete protection for your wood floors. Ridgeline forms an unlimited moisture vapor barrier, resists alkalinity, and greatly reduces impact and sound transmission. With no moisture-related testing required, Ridgeline saves you valuable time and money.

WHY USE

- Unlimited moisture protection (porous slab)
- Cost savings potential
- No moisture or pH testing required
- Permanent, waterproof bond
- Solvent and isocyanate-free
- Non-staining and easy to clean
- 1-step installation (no stirring/mixing)
- High-strength, elastomeric membrane
- Rapid occupancy times
- Faster construction timeline
- Sound control (IIC, STC)
- Warranted over cutback residue (see TDS)
- Protects flooring from alkali attack
- Extremely low VOC, extremely low odor
- Antimicrobial technology

NO TESTING



COST SAVINGS POTENTIAL

Skip Testing: Can save \$0.15/ft² by not having to moisture or pH test

Start Installing: Save days or weeks by avoiding costly construction delays

Save \$4-5/ft² by not having to bead blast, skim coat, or use a 2-part epoxy system

Savings are based on an estimated national average and may vary based on location and job site.



RH
NTR*
100%



PH
NTR*
5-14



MVER
NTR*



OPEN
TIME
0 MIN



WORKING
TIME
45 MIN



CURE
TIME
12 HRS



LIGHT
TRAFFIC
6 HRS



HEAVY
TRAFFIC
6 HRS



ΔIIC
68 dB**



STC
62 dB**

IRONWOOD[®]

WHY USE

- 95% moisture protection (porous slab)
- Permanent, waterproof bond
- Solvent and isocyanate-free
- Non-staining and easy to clean
- 1-step installation (no stirring/mixing)
- High-strength, elastomeric membrane
- Rapid occupancy times
- Sound control (IIC, STC)
- Warranted over cutback residue (see TDS)
- Protects flooring from alkali attack
- Extremely low VOC, extremely low odor
- Antimicrobial technology

SIGNATURE LINE[®]

95% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

Available in 4 gallons

In the realm of multi-functioning wood adhesives, **Ironwood** nails it. Through its stable, cross-linking chemistry, Ironwood ensures that your flooring stays where you want it. Capable of managing moisture from most concrete slabs, Ironwood is also resistant to high alkalinity.



RH
95%



PH
NTR*
5-14



MVER
15 LBS



OPEN
TIME
0 MIN



WORKING
TIME
45 MIN



CURE
TIME
12 HRS



LIGHT
TRAFFIC
6 HRS



HEAVY
TRAFFIC
6 HRS




ΔIIC
68 dB**



STC
61 dB**

*NTR = No Testing Required

**Ratings based on 6" concrete slab with a suspended wallboard ceiling overlaid with 3/8" engineered hardwood flooring

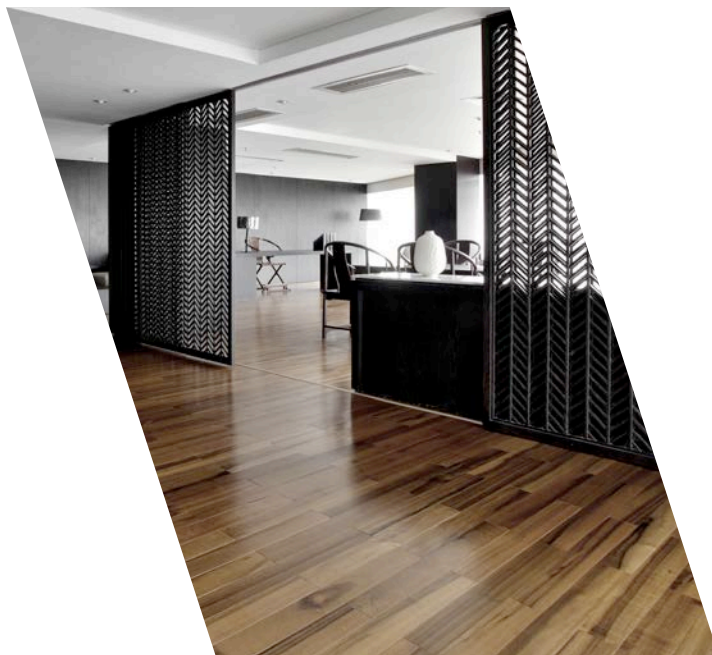

ASPEN[®]

SIGNATURE LINE[®]

**90% MOISTURE VAPOR BARRIER,
ELASTOMERIC ADHESIVE**

Available in 4 gallons



Aspen keeps you firmly grounded with both its price and performance. Created to offer an alternative to traditional urethane-based adhesives, Aspen is an easy-to-clean, low-odor, isocyanate-free solution. With its early grab, fast-curing formula and tenacious bond, Aspen reduces project time and labor accompanying most wood flooring installations.

WHY USE

- 90% moisture protection (porous slab)
- Attractive price point
- Permanent, waterproof bond
- Solvent and isocyanate-free
- Non-staining and easy to clean
- 1-part installation (no stirring/mixing)
- Rapid occupancy times
- High-strength, elastomeric membrane
- Sound control
- Warranted over cutback residue (see TDS)
- Protects flooring from alkali attack
- Extremely low VOC, extremely low odor
- Antimicrobial technology



RH
90%



PH
NTR*
5-14



MVER
10 LBS



OPEN
TIME
0 MIN



WORKING
TIME
45-60 MIN



CURE
TIME
12 HRS



LIGHT
TRAFFIC
6 HRS



HEAVY
TRAFFIC
6 HRS

IRONWOOD[®] GLUE ASSIST

WHY USE

- Reduces friction squeaks common with nail/staple-down installations
- Wet-set, early grab, fast-curing formula
- Solvent and isocyanate-free
- Non-staining and easy to clean
- Rapid occupancy times
- High-strength, waterproof, elastomeric bond
- Warranted over cutback residue (see TDS)
- Extremely low VOC, extremely low odor
- LEED v4 contributing (CDPH v1.2)
- Antimicrobial technology

SIGNATURE LINE[®]

WOOD FLOORING, GLUE ASSIST ADHESIVE

Available in 28 ounces

Ironwood Glue Assist makes squeaks and creaks a thing of the past. Keep your floors quiet by reducing friction noises with the high-strength, elastomeric bond of Ironwood Glue Assist. This wet-set, early-grab, fast-curing formula is low-odor and easy-to-clean, leaving no surface residue or ghosting, even once dried.




OPEN
TIME
0 MIN



WORKING
TIME
45 MIN



CURE
TIME
12 HRS

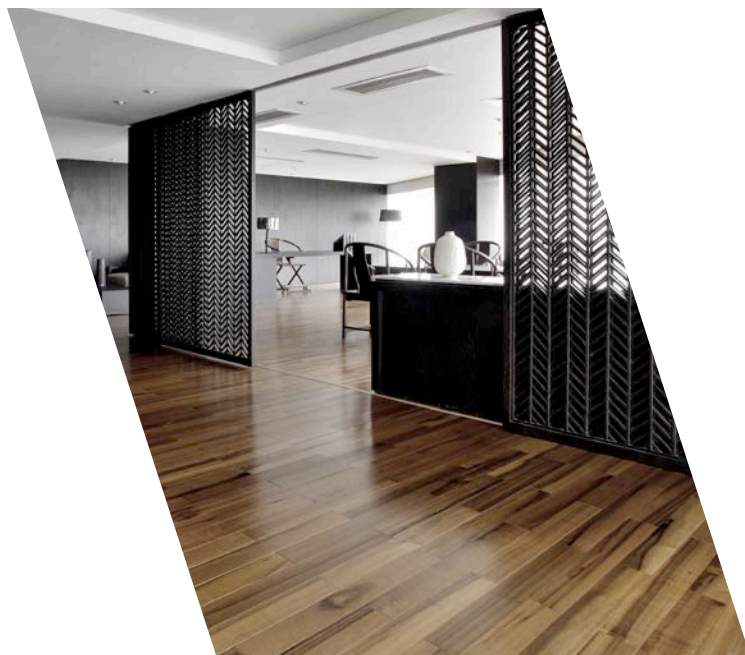

EXTREMELY
▶ **LOW**
ODOR

AGILE[®]

SIGNATURE LINE[®]

HARD-SET, MULTI-PURPOSE ADHESIVE

Available in 4 gallons



Agile has the flexibility to adapt to its environment. Designed to be used for direct glue-down, as well as double-stick applications, Agile is the ultimate choice for your project. Boasting early leg development, quick upfront grab, and a permanent, high-strength bond, Agile ensures even your patterned carpet installations hold perfectly in place.

WHY USE

- Early leg development
- Aggressive tack, fast-grab formula
- High-strength, elastomeric bond
- Up to 2 hours working time
- Rapid occupancy
- Permanent, water-resistant bond
- Attractive price point
- Installs multiple flooring types
- Simple installation
- Solvent and isocyanate-free
- Low VOC, extremely low odor
- Antimicrobial technology



RH
90%



PH
5-9



MVER
8 LBS



OPEN
TIME
15-45 MIN*



WORKING
TIME
15-60 MIN*



CURE
TIME
12 HRS



LIGHT
TRAFFIC
12 HRS*



HEAVY
TRAFFIC
24 HRS*

VERSATILE®

WHY USE

- Repositionable for entire life cycle
- Aggressive tack, fast grab
- High-moisture tolerance
- Elastomeric, water-resistant bond
- Immediate access for light traffic
- 24 hours of working time
- Attractive price point
- Installs multiple flooring types
- ColorReady® technology
- Simple installation
- Plasticizer migration resistance
- Solvent and isocyanate-free
- Non-staining and easy-to-clean
- Low VOC, extremely low odor
- Antimicrobial technology

SIGNATURE LINE®

SOFT-SET, FULLY REPOSITIONABLE PRESSURE SENSITIVE ADHESIVE

Available in 1 and 4 gallons

Versatile gets the job done again and again... and again. With its high-tack, fully repositionable design and immediate access for light traffic, it gives you the freedom to move. Versatile has multiple application methods that make it a perfect solution for all your modular flooring needs.



RH
95%



PH
5-10



MVER
10 LBS



FLASH
TIME
30-60 MIN



WORKING
TIME
24 HRS



CURE
TIME
24 HRS



LIGHT
TRAFFIC
0 MIN



HEAVY
TRAFFIC
24 HRS



SAHARA®

SIGNATURE LINE®

UNLIMITED MOISTURE VAPOR BARRIER, ELASTOMERIC MEMBRANE

Available in 2 gallons



When you need complete peace of mind, **Sahara** covers all your bases. Engineered to combat extreme moisture installations, it is one of the most aggressive moisture vapor barrier products on the market. Sahara can speed-up your construction timeline, eliminating the need for costly moisture testing.

WHY USE

- Protects floating and loose-lay flooring
- Unlimited moisture protection (porous slab)
- Replaces 2-part epoxies
- Cost savings potential
- No testing required (RH, pH, MVER)
- No shot/bead-blasting required (CSP 1+)
- Protects flooring from alkali attack
- Permanent, waterproof membrane
- Simple, 1-part installation
- Inhibits mold/mildew growth
- Faster construction timeline
- Self-healing, elastomeric membrane
- Handles extreme heavy rolling loads
- Solvent and isocyanate-free
- 1-step installation (no stirring/mixing)
- Extremely low VOC, extremely low odor
- Antimicrobial technology

NO TESTING



COST SAVINGS POTENTIAL

Skip Testing: Can save \$0.15/ft² by not having to moisture or pH test

Start Installing: Save days or weeks by avoiding costly construction delays

Save \$4-5/ft² by not having to bead blast, skim coat, or use a 2-part epoxy system

Savings are based on an estimated national average and may vary based on location and job site.



RH
NTR*
100%



PH
NTR*
5-14



MVER
NTR*



CURE
TIME
8 HRS

ZEPHYR[®]

WHY USE

- Protects floating and loose-lay flooring
- 93-95% moisture protection
- Inhibits mold/mildew growth
- Encapsulates cutback residue
- Fast-drying formula
- Detackifies existing adhesive residue
- Primes porous substrates
- Protects flooring from alkali attack
- Attractive price point
- 1-step installation (no stirring/mixing)
- Fast roller application
- Solvent and isocyanate-free
- Zero VOC, extremely low odor
- Antimicrobial technology

SIGNATURE LINE[®]

95% MOISTURE VAPOR BARRIER, ENCAPSULATOR, OR PRIMER COATING

Available in 4 gallons

Zephyr is a simple way to protect what's on top. Engineered to fight moisture, Zephyr can also be used as a primer, or even an encapsulator, eliminating the need to remove existing or cutback adhesive residue. This one-part, roller-applied coating requires no stirring or mixing and is uniquely adaptable to varying moisture levels.



RH
93-95%**



PH
NTR*
5-14



MVER
10-15 LBS**



CURE
TIME
1-2 HRS

*NTR = No Testing Required

**Based on 1- or 2-coat application - see technical data sheet for complete details.



ENHANCE[®]

SIGNATURE LINE[®]

SURFACE BOND PROMOTER & ENCAPSULATOR

Available in 2 gallon



Take your job site to the next level with **Enhance**. Its multi-functioning capabilities tackle many tough challenges such as detackifying or encapsulating existing adhesive residue, including cutback. Even difficult-to-bond substrates are no match for the textured surface profile Enhance provides.

WHY USE

- Highly-bondable, textured membrane
- Primes difficult-to-bond substrates
- Protects flooring from alkali attack
- Encapsulates cutback residue
- Detackifies existing adhesive residue
- Seals porous substrates
- Simple, 1-part installation (roller-applied)
- Rapid 1-2 hour cure time
- Primes Sahara for glue-down applications
- Extremely low VOC, extremely low odor
- Solvent and isocyanate-free
- Antimicrobial technology



RH
90%



PH
NTR*
5-14



MVER
8 LBS



CURE
TIME
1-2 HRS

FINALE[®]

WHY USE

- Cures off-white
- Non-staining and easy-to-clean
- Strong plasticizer migration resistance
- High-strength, water-resistant bond
- Permanent, elastomeric bond
- Attractive price point
- Aggressive tack, fast-grab formula
- 30 minute working time
- Simple installation
- Low VOC, extremely low odor
- Solvent and isocyanate-free
- Antimicrobial technology

SIGNATURE LINE[®]

HARD-SET, ELASTOMERIC COVE BASE ADHESIVE

Available in 10 ounces, 30 ounces, 1 gallon, 4 gallons

Cross the finish line first with **Finale**. With its immediate grab, Finale holds the pressure of inner and outer corners, allowing you to give your job site the final touch. Finale works flawlessly over multiple surfaces and has excellent plasticizer migration resistance to firmly hold your bases.



OPEN
TIME
0 MIN



WORKING
TIME
30 MIN



CURE
TIME
12 HRS



INTROD

2 NEW SIGNATURE LINE



ELEVATE™ YOUR ATMOSPHERE

Take your flooring to a whole new dimension with our roller applied wall adhesive for vinyl plank and tile.



SCAN TO LEARN MORE

DUCCING

® SPECIALTY PRODUCTS

HARNESS THE POWER OF GRAVITY™

Turn the tide of your flooring installation with our anti-skid substrate coating for floating floor installation.

SCAN TO LEARN MORE



SIGNATURE LINE® ADHESIVE PRODUCTS

APPROVED FLOORING TYPES

FLOORING TYPE		RESOLUTE® 50-250 ft ² /gal	PINNACLE® 150-350 ft ² /gal	DYNAMIC® 90-350 ft ² /gal	STEADFAST® 220-300 ft ² /gal
RESILIENT	LINOLEUM				
	MODULAR (LVP, LVT)				
	MODULAR (RIGID CORE - DRYBACK)				
	MODULAR (SVT, VET)				
	MODULAR (VCT)				
	MODULAR (WOVEN)				
	RUBBER (CRUMB)				
	RUBBER (SHEET & TILE)				
	SHEET (FELT-BACKED)				
	SHEET (FIBERGLASS)				
	SHEET (HETEROGENEOUS)				
	SHEET (HOMOGENEOUS)				
	SHEET (WOVEN)				
	STAIR TREADS (RUBBER, VINYL)				
WOOD	ACRYLIC IMPREGNATED PLANK				
	BAMBOO (STRAND WOVEN)				
	BAMBOO (NOT STRAND WOVEN)				
	CORK (FLOORING)				
	CORK (CORK-BACKED HARD SURFACE)				
	CORK (UNDERLAYMENT)				
	HARDWOOD (ENGINEERED, PARQUET)				
	HARDWOOD (SOLID)				
CARPET	ARTIFICIAL TURF				
	BROADLOOM (6-FT VINYL-BACKED)				
	BROADLOOM (ACTION-BAC, JUTE-BACK)				
	BROADLOOM (CARPET PAD)				
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)				
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)				
	BROADLOOM (HOT-MELT-BACKED)				
	BROADLOOM (HP & VINYL-BACKED)				
	BROADLOOM (NON-VINYL-BACKED PATTERNED)				
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)				
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)				
	BROADLOOM (WOVEN-BACKED)				
	MODULAR (HARD-BACKED CARPET TILE)				
	MODULAR (SOFT-BACKED CARPET TILE)				
	MODULAR (WALK-OFF CARPET TILE)				



For more details visit tayloradhesives.com.



Scan or search for Taylor Adhesives in the app store to download our app.



Scan for complete product information.

RIDGELINE® 20-70 ft²/gal	IRONWOOD® 20-70 ft²/gal	ASPEN® 20-70 ft²/gal	IRONWOOD® GLUE ASSIST® 20-70 ft²/gal	AGILE® 50-180 ft²/gal	VERSATILE® 150-350 ft²/gal
				☞	
					☞
					☞
					☞
☞	☞	☞			
				☞	
					☞
☞	☞	☞	☞		
☞	☞	☞	☞		
☞	☞	☞	☞		
☞	☞	☞	☞	☞	
☞	☞	☞	☞	☞	☞
☞	☞	☞	☞		
☞	☞	☞	☞		
					☞ ☞
				☞	
				☞	
				☞	☞
				☞	
					☞ ☞
				☞	
				☞	
				☞	
					☞ ☞
					☞

NOTE: Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart above.

SIGNATURE LINE® PRODUCTS

APPROVED INSTALLATION TOOLS

	PRODUCT	TOOL	FLOORING TYPE	COVERAGE
RESILIENT	RESOLUTE®	MOISTURE BARRIER & SOUND CONTROL 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (LVP, LVT, SVT, VCT, VET), Sheet (felt-backed, fiberglass, heterogeneous, homogeneous, woven)	180-250 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Modular (rigid core [dryback], woven), Rubber (crumb, sheet tile), Stair Treads (rubber, vinyl) CARPET: Modular (hard-backed, soft-backed, walk-off) WOOD: Cork (flooring, cork-backed hard surface, underlayment)	75-125 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/8" x 1/8" x 1/16" U Notch	CARPET: Artificial Turf	50-65 ft ² /gal
	PINNACLE®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (LVP/LVT [non-porous], SVT, VCT, VET), Sheet (heterogeneous/homogeneous/woven [non-porous])	220-260 ft ² /gal
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Modular (LVP/LVT [porous], rigid core [dryback], woven), Rubber (crumb, sheet tile), Sheet (heterogeneous/homogeneous/woven [porous]), Stair Treads (rubber, vinyl) CARPET: Broadloom (6-ft vinyl-backed) WOOD: Cork (cork-backed hard surface, underlayment)	150-180 ft ² /gal
		BOND ONLY 3/8" Short Nap Paint Roller	RESILIENT: Sheet (fiberglass)	Up to 350 ft ² /gal
	DYNAMIC®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (LVP/LVT [non-porous], SVT, VCT, VET), Sheet (heterogeneous/homogeneous [non-porous]), Stair Treads (rubber/vinyl [non-porous]) CARPET: Modular (hard-backed/soft-backed [non-porous])	220-260 ft ² /gal
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Modular (LVP/LVT [porous], rigid core [dryback]) Rubber (crumb, sheet, tile), Sheet (heterogeneous/homogeneous [porous]), Stair Treads (rubber/vinyl [porous]) CARPET: Broadloom (6-ft vinyl-backed, double-stick-cushion-to-substrate) Modular (hard-backed/soft-backed [porous], walk-off) WOOD: Cork (cork-backed hard surface, underlayment)	150-180 ft ² /gal
		BOND ONLY 1/8" x 1/8" x 1/16" V Notch	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, HP & vinyl-backed, polyurethane, rubber-backed, unitary Action-Bac)	90-120 ft ² /gal
		BOND ONLY 1/8" x 1/8" x 1/16" U Notch	CARPET: Broadloom (double-stick carpet-to-cushion, unitary, woven-backed)	50-65 ft ² /gal
		BOND ONLY 3/8" Short Nap Paint Roller	RESILIENT: Sheet (fiberglass) CARPET: Modular (hard-backed)	Up to 350 ft ² /gal
	STEADFAST®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (VCT [porous])	220-260 ft ² /gal
BOND ONLY 1/16" x 1/32" x 5/64" U Notch		RESILIENT: Modular (VCT [non-porous])	Up to 300 ft ² /gal	
WOOD	RIDGELINE®	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard-surface, underlayment), Hardwood (parquet)	60-70 ft ² /gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	25-30 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	Up to 20 ft ² /gal
	IRONWOOD®	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard-surface, underlayment), Hardwood (parquet)	60-70 ft ² /gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	25-30 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	Up to 20 ft ² /gal
	ASPEN®	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard-surface, underlayment), Hardwood (parquet)	60-70 ft ² /gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	25-30 ft ² /gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	Up to 20 ft ² /gal
	Ironwood® Glue Assist	BOND ONLY Tip Applicator Included	WOOD: Acrylic Impregnated Plank, Bamboo, Cork (flooring, cork-backed hard surface, underlayment) Hardwood (engineered, parquet, solid)	Dependent upon user



Scan for complete product information.

PRODUCT		TOOL	FLOORING TYPE	COVERAGE
CARPET	AGILE®	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Sheet (felt-backed) WOOD: Cork (underlayment)	150-180 ft²/gal
		BOND ONLY 3/32" x 3/32" x 3/32" V Notch	CARPET: Broadloom (double-stick cushion-to-substrate, polyurethane, rubber-backed) WOOD: Cork (cork-backed hard surface)	90-120 ft²/gal
		BOND ONLY 1/8" x 1/8" x 1/16" V Notch	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed)	90-120 ft²/gal
		BOND ONLY 1/8" x 1/8" x 1/16" U Notch	CARPET: Broadloom (double-stick carpet-to-cushion, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	50-65 ft²/gal
	VERSATILE®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	CARPET: Broadloom (6-ft vinyl-backed, HP & vinyl-backed) RESILIENT: Modular (LVP, LVT, SVT, VCT, VET [non-porous])	220-260 ft²/gal
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	CARPET: Broadloom (double-stick cushion-to-substrate) Modular (hard-backed, soft-backed) RESILIENT: Modular (LVP, LVT, SVT, VCT, VET [porous]) WOOD: Cork (underlayment)	150-180 ft²/gal
BOND ONLY 3/8" Short Nap Roller		RESILIENT: Sheet (fiberglass) CARPET: Broadloom (6-ft vinyl-backed, HP & vinyl-backed) Modular (hard-backed)	Up to 350 ft²/gal	
MOISTURE	SAHARA®	MOISTURE BARRIER 1/8" x 1/8" x 1/16" V Notch	For use under all glue-down, loose-lay, and floating floors	90-120 ft²/gal
	ZEPHYR®	MOISTURE BARRIER 3/8" Short Nap Paint Roller	For use under all glue-down, loose-lay, and floating floors	350 ft²/gal (1 coat) 200 ft²/gal (2 coats)
SPECIALTY	ENHANCE®	BOND ONLY 1/2" Short Nap Paint Roller	For use under all glue-down, loose-lay, and floating floors	Up to 250 ft²/gal
	FINALE®	BOND ONLY 3/32" x 3/32" x 3/32" V Notch	Approved base types: rubber, vinyl, rubber-vinyl blends, carpet	2" base - up to 560 lf/gal 4" base - up to 280 lf/gal 6" base - up to 187 lf/gal
	ELEVATE™	BOND ONLY 3/8" Short Nap Paint Roller	Approved LVP, LVT	Up to 350 ft²/gal
	GRAVITY™	BOND ONLY 3/8" Short Nap Paint Roller	Approved floating flooring products	Up to 350 ft²/gal

TOOL MEASUREMENTS

Trowel measurements = width x depth x spacing



1/16" x 1/32" x 1/32" U Notch
1.6mm x 0.8mm x 0.8mm U Notch



1/16" x 1/32" x 5/64" U Notch
1.6mm x 0.8mm x 2mm U Notch



1/16" x 1/16" x 1/16" Sq Notch
1.6mm 1.6mm 1.6mm Sq Notch



3/32" x 3/32" x 3/32" V Notch
2.4mm x 2.4mm x 2.4mm V Notch



1/8" x 1/8" x 1/16" V Notch
3.2mm x 3.2mm x 1.6mm V Notch



1/8" x 1/8" x 1/16" U Notch
3.2mm x 3.2mm x 1.6mm U Notch



1/8" x 1/8" x 1/8" Sq Notch
3.2mm x 3.2mm x 3.2mm Sq Notch



1/4" x 1/4" V Notch
6.35mm x 6.35mm V Notch



3/16" x 1/4" x 5/16" V Notch
4.8mm x 6.4mm x 7.9mm V Notch



1/2" x 15/32" V Notch
12.7mm x 11.9mm V Notch



3/8" Short Nap Paint Roller
9.5mm Short Nap Paint Roller



1/2" Short Nap Paint Roller
12.7mm Short Nap Paint Roller

IMPORTANT NOTE: Always use an approved tool that is in good condition. This maintains performance and protects your warranty.





ESSENTIALS LINE

Introducing a brand-new collection of products designed to complement our popular TAYLOR Signature Line®. Many of these essentials have been in the Taylor family for years, but now have a new home and an updated look.

By upholding our exacting quality and proven performance standards, this collection offers unique solutions for every flooring installer.

ESSENTIALS LINE SUSTAINABILITY IS DIFFERENT FOR EACH PRODUCT

Certified by:



CERTIFIED BY
SCS Global Services



Listed in:



Gold member of:



USGBC
MEMBER

LEED v4 contributing:



RESILIENT

2062 is a solvent-free seam sealer designed for use with fiberglass sheet in direct glue-down installations. This synthetic latex blend is non-flammable and easy-to-clean.

WHY USE

- Water-resistant bond
- Plasticizer migration resistance
- Easy application
- Non-staining, easy-to-clean
- Attractive price point
- Antimicrobial technology
- Low VOC, extremely low odor
- Solvent-free



ESSENTIALS LINE

2062

FIBERGLASS SHEET SEAM SEALER

Available in 8 ounces



WORKING TIME
5-10 MIN



CURE TIME
12 HRS



LIGHT TRAFFIC
24 HRS



HEAVY TRAFFIC
24 HRS

WOOD



MS-Plus Advance is formulated for the interior installation of all wood flooring types including: solid, engineered and parquet hardwood, cork and cork-backed products, bamboo, acrylic impregnated plank and even recycled rubber. This single-part adhesive protects flooring from moisture damage and greatly reduces sound transmission.

WHY USE

- 90% moisture protection (porous slab)
- Permanent, waterproof bond
- Elastomeric bond, isocyanate-free
- Non-staining and easy to clean
- Sound control
- Can be used over cutback residue
- Protects flooring from alkali attack
- Antimicrobial technology

ESSENTIALS LINE

MS-PLUS[®] ADVANCE

90% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

Available in 4 gallons



RH
90%



PH
5-14



MVER
10 lbs



OPEN TIME
0 MIN



WORKING TIME
45-60 MIN



LIGHT TRAFFIC
6 HRS



HEAVY TRAFFIC
6 HRS



ΔIIC
52 dB*



STC
51 dB*

*Ratings based on 6" concrete slab overlaid with 1/2" engineered hardwood flooring

Timberline is designed to easily install several flooring types including: solid (shorts) and engineered wood, parquet, cork, bamboo (not strand woven) and recycled rubber. This one-part, moisture-cured polyurethane is low VOC and low odor.

WHY USE

- Aggressive tack, fast-grab
- High-strength, elastomeric bond
- Permanent, waterproof bond
- Non-slump formula
- Easy application
- No stirring/mixing required
- Low VOC, low odor



ESSENTIALS LINE

TIMBERLINE™

MOISTURE-CURED URETHANE ADHESIVE

Available in 3.5 gallons

*This product does not provide moisture protection.



RH
75%*



PH
5-9



MVER
5 lbs*



OPEN
TIME
10 MIN



WORKING
TIME
45-60 MIN



CURE
TIME
24 HRS



LIGHT
TRAFFIC
4 HRS



HEAVY
TRAFFIC
12 HRS



2071 is designed for the interior installation of engineered wood, dry-back parquet and acrylic impregnated plank. This amide-ester-acrylate blend adhesive is non-flammable and fully cross-links into a waterproof bond.

ESSENTIALS LINE

2071

CROSS-LINKING LATEX ADHESIVE

Available in 1 and 4 gallons

WHY USE

- Aggressive tack, fast-grab formula
- High-strength, elastomeric bond
- Permanent, waterproof bond
- Non-staining, easy-to-clean
- Solvent and isocyanate-free
- Warranted over cutback residue
- Extremely low VOC, extremely low odor
- Easy application
- Antimicrobial technology



RH
75%



PH
5-9



MVER
3 lbs



OPEN
TIME
10-15 MIN



WORKING
TIME
45-60 MIN



LIGHT
TRAFFIC
24 HRS



HEAVY
TRAFFIC
48 HRS

WOOD

2049 is designed to glue tongue-and-groove for a variety of wood flooring, laminate, rigid-core and other floating floors. This vinyl acetate resin blend can be used over radiant heated floors and cross-links to form a water-resistant bond (passes the ANSI Type II test).

WHY USE

- ANSI Type II water-resistance
- Permanent, water-resistant bond
- Non-staining, easy-to-clean
- Solvent and isocyanate-free
- Zero VOC, extremely low odor
- Attractive price point
- Easy application
- Antimicrobial technology



ESSENTIALS LINE 2049

FLOATING FLOOR TONGUE-AND-GROOVE ADHESIVE

Available in 16 ounces



OPEN
TIME
0 MIN



WORKING
TIME
5-10 MIN



CURE
TIME
12 HRS



LIGHT
TRAFFIC
24 HRS



HEAVY
TRAFFIC
24 HRS

CARPET



900 is designed for the interior installation of direct glue-down, breathable, non-vinyl-backed carpet. This easy-to-spread, synthetic latex and hydrocarbon resin blend adhesive has strong wet-tack and a water-resistant bond.

WHY USE

- Permanent, water-resistant bond
- Up to 120-minute working time
- Attractive price point
- Installs multiple flooring types
- Easy application
- Low VOC, extremely low odor
- Solvent-free
- Antimicrobial technology

ESSENTIALS LINE

900

GENERAL PURPOSE LATEX ADHESIVE

Available in 4 gallons



RH
75%



PH
5-9



MVER
5 lbs



OPEN
TIME
20-30 MIN



WORKING
TIME
15-120 MIN



LIGHT
TRAFFIC
12 HRS



HEAVY
TRAFFIC
24 HRS

722 is designed to quickly lock carpet pad into place. This easy-to-use synthetic latex and hydrocarbon resin blend is non-flammable, solvent-free, fast-grabbing, and prevents slippage during power-stretching with its immediate wet-suction.

WHY USE

- Water-resistant bond
- Easy application
- Non-staining, easy-to-clean
- Attractive price point
- Low VOC, extremely low odor
- Solvent-free
- Antimicrobial technology



ESSENTIALS LINE
722

WATER-BASED PAD ADHESIVE

Available in 1 gallon



RH
75%



PH
5-9



MVER
3 lbs



OPEN
TIME
0 MIN



WORKING
TIME
45-60 MIN



CURE
TIME
12 HRS



710 is designed for a variety of applications, including: applying seaming tapes, joining padding, sealing raw edges, securing binding, patching carpet, replacing damaged nap and reinforcing seams and weak backings. This water-resistant, easy-to-spread synthetic latex and hydrocarbon resin blend dries extremely fast, starts white, and dries to a translucent amber.

ESSENTIALS LINE
710

MULTI-PURPOSE LATEX ADHESIVE

Available in 1 quart and 1 gallon

WHY USE

- Water-resistant bond
- Easy application
- Non-staining, easy-to-clean
- Attractive price point
- Extremely low odor
- Solvent-free
- Antimicrobial technology



WORKING
TIME
15-30 MIN



CURE
TIME
24 HRS



LIGHT
TRAFFIC
24 HRS



HEAVY
TRAFFIC
24 HRS

CARPET

Edge-Lock is designed to prevent carpet edge unraveling and seal cut edges to prepare them for hot-melt and glue-down seaming. This synthetic latex blend is easy-to-use, fast drying, and has blacklight tracers to verify proper application.

WHY USE

- Blacklight tracers
- Water-resistant bond
- Easy application
- Non-staining, easy-to-clean
- Low VOC, extremely low odor
- Attractive price point
- Solvent-free
- Antimicrobial technology



ESSENTIALS LINE EDGE-LOCK CARPET EDGE SEALING GLUE

Available in 8 ounces



WORKING
TIME
5-10 MIN



CURE
TIME
12 HRS



LIGHT
TRAFFIC
24 HRS



HEAVY
TRAFFIC
24 HRS

SPECIALTY



ESSENTIALS LINE 2025

UNIVERSAL LATEX PRIMER COATING

Available in 1 and 4 gallons

2025 is designed to prevent over-absorption of adhesives by priming most porous surfaces including floor patch, gypcrete, and acoustical concrete. This synthetic latex blend not only ensures a better bond, but also protects flooring from alkali attack.

WHY USE

- Primes porous substrates
- pH blocker, protects flooring
- No stirring/mixing required
- Fast, 1-coat, roller application
- Fast-drying formula
- Solvent and isocyanate-free
- Zero VOCs, extremely low odor
- Attractive price point
- Antimicrobial technology



RH
75%



PH
5-14



MVER
5 lbs



CURE
TIME
30-60 MIN

ESSENTIALS LINE PRODUCTS

APPROVED INSTALLATION TOOLS

PRODUCT	TOOL	FLOORING TYPE	COVERAGE	
RESILIENT	2062	Applicator tip	RESILIENT: Sheet (fiberglass)	90-100 lf/8oz
WOOD	MS-PLUS® ADVANCE	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard surface, underlayment) Hardwood (parquet)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 3/16" x 1/4" x 1/2" Flat V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	25-30 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo, Hardwood (engineered, solid [planks greater than 6' long and 5" wide])	Up to 20 ft²/gal
	TIMBERLINE™	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	WOOD: Cork (underlayment) RESILIENT: Rubber (crumb)	150-180 ft²/gal
		BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, underlayment), Hardwood (parquet) RESILIENT: Rubber (crumb)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Impregnated Plank, Bamboo (not strand woven), Cork (flooring, cork-backed hard surface, underlayment), Hardwood (engineered, parquet, solid)	Up to 50 ft²/gal
	2071	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, underlayment), Hardwood (parquet) RESILIENT: Rubber (crumb)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Impregnated Plank, Cork (flooring, cork-backed hard surface, underlayment) Hardwood (engineered, parquet)	Up to 50 ft²/gal
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	WOOD: Cork (underlayment) RESILIENT: Rubber (crumb)	150-180 ft²/gal
2049	Applicator tip	WOOD: Acrylic Impregnated Plank, Hardwood (engineered, parquet)	400 lf/16oz	
CARPET	900	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Sheet (felt-backed [porous])	150-180 ft²/gal
		BOND ONLY 1/8" x 1/8" x 1/16" V Notch	CARPET: Broadloom (Action-Bac, jute-back)	90-120 ft²/gal
	722	BOND ONLY Tip Applicator Included	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	~1000 lf/gal
	710	BOND ONLY Tip Applicator Included	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	~1200 lf/gal
	EDGE-LOCK	BOND ONLY Tip Applicator Included	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	~75 lf/8oz
SPECIALTY	2025	3/8" Short Nap Paint Roller	For use under all glue-down, loose-lay, and floating floors	300-450 ft²/gal

TOOL MEASUREMENTS

Trowel measurements = width x depth x spacing



Scan for complete product information.



1/16" x 1/32" x 1/32" U Notch
1.6mm x 0.8mm x 0.8mm U Notch



3/16" x 1/4" x 1/2" V Notch
4.8mm x 6.4mm x 12.7mm V Notch



3/16" x 1/4" x 5/16" V Notch
4.8mm x 6.4mm x 7.9mm V Notch



1/16" x 1/16" x 1/16" Sq Notch
1.6mm 1.6mm 1.6mm Sq Notch



1/8" x 1/8" x 1/8" Sq Notch
3.2mm x 3.2mm x 3.2mm Sq Notch



1/2" x 15/32" V Notch
12.7mm x 11.9mm V Notch



3/16" x 1/4" x 1/2" Flat V Notch
4.8mm x 6.4mm x 12.7mm Flat V Notch



3/8" Short Nap Paint Roller
9.5mm Short Nap Paint Roller

IMPORTANT NOTE: Always use an approved tool that is in good condition. This maintains performance and protects your warranty.

ESSENTIALS LINE ADHESIVE PRODUCTS

APPROVED FLOORING TYPES

FLOORING TYPE		2062 90-100 lf/8oz	MS-PLUS® ADVANCE 20-70 ft²/gal	TIMBERLINE™ 50-180 ft²/gal
RESILIENT	LINOLEUM			
	MODULAR (LVP, LVT)			
	MODULAR (RIGID CORE - DRYBACK)			
	MODULAR (SVT, VET)			
	MODULAR (VCT)			
	MODULAR (WOVEN)			
	RUBBER (CRUMB)		↙	↙
	RUBBER (SHEET & TILE)			
	SHEET (FELT-BACKED)			
	SHEET (FIBERGLASS)	✓		
	SHEET (HETEROGENEOUS)			
	SHEET (HOMOGENEOUS)			
	SHEET (WOVEN)			
	STAIR TREADS (RUBBER, VINYL)			
WOOD	ACRYLIC IMPREGNATED PLANK		↙	↙
	BAMBOO (STRAND WOVEN)		↙	↙
	BAMBOO (NOT STRAND WOVEN)		↙	↙
	CORK (FLOORING)		↙	↙
	CORK (CORK-BACKED HARD SURFACE)		↙	↙
	CORK (UNDERLAYMENT)		↙	↙
	HARDWOOD (ENGINEERED, PARQUET)		↙	↙
	HARDWOOD (SOLID)		↙	↙
CARPET	ARTIFICIAL TURF			
	BROADLOOM (6-FT VINYL-BACKED)			
	BROADLOOM (ACTION-BAC, JUTE-BACK)			
	BROADLOOM (CARPET PAD)			
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)			
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)			
	BROADLOOM (HOT-MELT-BACKED)			
	BROADLOOM (HP & VINYL-BACKED)			
	BROADLOOM (NON-VINYL-BACKED PATTERNED)			
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)			
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)			
	BROADLOOM (WOVEN-BACKED)			
	MODULAR (HARD-BACKED CARPET TILE)			
	MODULAR (SOFT-BACKED CARPET TILE)			
	MODULAR (WALK-OFF CARPET TILE)			



ADDITIONAL ITEMS



FIBERGLASS BACKED SHEET VINYL PRESSURE SENSITIVE ADHESIVE

2037

2037 is a clear set, solvent-free, pressure sensitive adhesive for the installation of fiberglass-backed sheet goods over approved substrates. Fast drying for quick installation, flooring can be installed up to 24 hours after application.

Coverage: 300-500 ft²/gal • Shelf Life: 1 year



SOLVENT-FREE EPOXY FLOORING ADHESIVE

501

501 is a fast-setting, two-part, low VOC epoxy system used to install vinyl and rubber flooring including hard-to-stick recycled products.

Coverage: 220-260 ft²/gal • Shelf Life: 1 year



POWER-TAC™ CONTRACT GRADE ADHESIVE

2070

2070 is a high performance, latex-based adhesive formulated to have aggressive tack for the interior installation of most types of carpet and resilient sheet goods. Not for use with vinyl backings.

Coverage: 90-180 ft²/gal • Shelf Life: 1 year



PERFORMANCE PLUS FAST-TACK CARPET ADHESIVE

2055

2055 provides quick grab with fast suction and holding power for the interior installation of all non-vinyl-backed carpet in direct glue-down and double-stick installations.

Coverage: 50-180 ft²/gal • Shelf Life: 1 year



TUFF-LOK X-LINK™ OUTDOOR CARPET ADHESIVE

2089

A non-flammable, high solids, advanced cross-linking resin blend adhesive. Recommended for the interior and exterior installation of exterior grade (Action Bac®) unitary backed carpet, and rubber-backed carpet over approved substrates.

Coverage: 50-120 ft²/gal • Shelf Life: 1 year




ALL WEATHER EXTERIOR CARPET ADHESIVE

757

757 is an all-weather adhesive specially made for the permanent exterior installation of outdoor carpets, excluding vinyl-backed and urethane unitaries.

(Product 757-C available to meet California SCAQMD)

Coverage: 50-120 ft²/gal • Shelf Life: 1 year

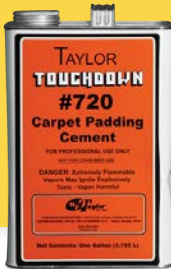

PAD CEMENT

720/720-C

Anchors carpet padding to any surface, effectively preventing slippage during power stretching. Dries fast – no tools or preparation needed.

EXTREMELY FLAMMABLE. FOR PROFESSIONAL USE ONLY.

(Product 720-C available to meet California SCAQMD)

Coverage: 500 ft²/gal • Shelf Life: 1 year



CARPET SEAM CEMENT-NATURAL

775/775-C

Permanently seam selvage edges and cross joints on carpet with 775. Not recommended for vinyl-backed carpets.

(Product 775-C available to meet California SCAQMD)

Coverage: 1500 lf/gal • Shelf Life: 1 year



TACKLES CEMENT

700

This specially formulated, high rubber content product is ideal for bonding carpet tack strips to almost any flooring surface – concrete, marble, terrazzo and wood. High strength formula permits immediate power stretching.

FLAMMABLE. FOR PROFESSIONAL USE ONLY.

Coverage: 1000 lf/gal • Shelf Life: 1 year



For more details visit tayloradhesives.com.

PRODUCT CATEGORY KEY

- RESILIENT ● WOOD ● CARPET ● SPECIALTY



ODYSSEY TYPE 1 PREMIUM CERAMIC TILE ADHESIVE

901

For the interior installation of ceramic wall and floor tile on vertical or horizontal surfaces. Virtually no tile slippage, easy spreading and a strong bond. Complies with ANSI 136.1, Type 1

Coverage: 35-50 ft²/gal • Shelf Life: 1 year



CONTACT CEMENT - BRUSH GRADE

1N/1N-C

Formulated to bond large, smooth surfaces such as formica to wood or particle board. Metal, plastic, rubber and wood veneer skins can be laminated to other smooth surfaces. Use when a permanent bond is desired. (Product 1N-C available to meet California SCAQMD)

Coverage: 200 ft²/gal • Shelf Life: 1 year



ALL PURPOSE SPRAY ADHESIVE

725

A non-wrinkling, pressure sensitive, all purpose spray that bonds to most materials including carpet, tile, fabrics, wood, hobby crafts, leather, etc.

Shelf Life: 1 year



18" Roller Assembly for Walls and Floors

18" ROLLER SYSTEM

This roller system is the most efficient way to use our roller-applied products. The 18" wide rollers allow for uniform coverage in less time with less mess. The application trays also double as lids, so you can leave adhesives covered for up to 6 hours without any drying out.



Woven and Microfiber Fabric Roller Cover Refill

18" ROLLER COVERS

- Applies a wide, uniform coat of product
- Minimizes high and low spots
- Integrated caps for easy roller replacement
- No moving parts
- No walk off
- Roller covers available in packs of six
- Applicator trays available in packs of five



TEMPORARY PROTECTION FOR MULTIPLE SURFACES

TAYLOR SHIELD

This temporary floor, counter, cabinet and surface protector is breathable, waterproof, anti-skid and reusable. Its adhesive underside allows for quick installation that retains grip. Made of non woven fibers, its anti-slip film prevents falls and tears. Ideal for interior construction projects but may be used on icy surfaces, playgrounds, vehicles, HVAC units and more.



TEMPORARY PROTECTION FOR EXISTING FLOORS

TAYLOR GUARD

Taylor Guard offers durable surface protection against spills, moisture, paint, mud and movers. Taylor Guard is reusable with 100% recycled fibers. With fast and easy setup, Taylor Guard can be simply rolled onto flooring to protect surface quality during renovations, alterations or moving.



BIO-ENZYMATIC ORGANIC-BASED ODOR ELIMINATOR

ODORGH0ST™ MULTI-SURFACE+UV

OdorGh0st Multi-Surface UV is a live enzyme engineered for odor removal. Its clinical strength is designed to consume any biological-based odor molecules.

Coverage: 600-800 ft²/gal • Shelf Life: 2 years



BIO-ENZYMATIC ORGANIC-BASED ODOR ELIMINATOR

ODORGH0ST™ MULTI-SURFACE

OdorGh0st Multi-Surface is a live enzyme engineered for odor removal. Its clinical strength is designed to consume any biological-based odor molecules.

Coverage: 600-800 ft²/gal • Shelf Life: 2 years



Scan or search for Taylor Adhesives in the app store to download our app.

PACKAGING & SHIPPING

SIGNATURE LINE®	CATEGORY	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	SHELF LIFE
	RESILIENT	Resolute*	2 gal	Plastic Pail	719692-022671	1	19 lbs	60	1 year
		Pinnacle*	1 gal	Plastic Pail	719692-022657	4	35 lbs	45	2 years
			4 gal	Plastic Pail	719692-022640	1	35 lbs	48	
		Dynamic*	1 gal	Plastic Pail	719692-022626	4	37 lbs	45	2 years
			4 gal	Plastic Pail	719692-022619	1	37 lbs	48	
		Steadfast*	1 gal	Plastic Pail	719692-023029	4	36 lbs	45	2 years
	4 gal		Plastic Pail	719692-023012	1	36 lbs	48		
	WOOD	Ridgeline*	4 gal	Plastic Pail	719692-022572	1	44 lbs	48	1 year
		Ironwood*	4 gal	Plastic Pail	719692-022633	1	43 lbs	48	1 year
Aspen*		4 gal	Plastic Pail	719692-023388	1	43 lbs	48	1 year	
Ironwood* Glue Assist		28 oz	Plastic Cartridge	719692-023623	12	28 lbs	40	1 year	
CARPET	Agile*	4 gal	Plastic Pail	719692-023074	1	43 lbs	48	2 years	
	Versatile*	1 gal	Plastic Pail	719692-022763	4	37 lbs	45	2 years	
		4 gal	Plastic Pail	719692-022701	1	37 lbs	48		
MOISTURE	Sahara*	2 gal	Plastic Pail	719692-022749	1	17 lbs	60	1 year	
	Zephyr*	4 gal	Plastic Pail	719692-022732	1	37 lbs	48	2 years	
SPECIALTY	Enhance*	2 gal	Plastic Pail	719692-023258	1	27 lbs	60	1 year	
	Finale*	10 oz	Plastic Cartridge	719692-023067	12	12 lbs	60	2 years	
		30 oz	Plastic Cartridge	719692-023050	12	35 lbs	50		
		1 gal	Plastic Pail	719692-023043	4	48 lbs	45		
		4 gal	Plastic Pail	719692-023036	1	48 lbs	48		
	Elevate™	1 gal	Plastic Pail	719692-023968	4	37 lbs	45	2 years	
Gravity™	4 gal	Plastic Pail	719692-023982	1	36 lbs	48	2 years		

ESSENTIALS LINE	CATEGORY	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	SHELF LIFE
	RESILIENT	2062	8 oz	Squeeze Bottle	719692-021063	12	8 lbs	60	2 years
	WOOD	MS-Plus* Advance	4 gal	Plastic Pail	719692-021773	1	44 lbs	48	1 year
		Timberline™	3.5 gal	Metal Pail	719692-023913	1	48 lbs	48	1 year
		2071	1 gal	Plastic Pail	719692-016342	4	43 lbs	45	2 years
			4 gal	Plastic Pail	7191092-015727	1	43 lbs	48	
	2049	16 oz	Squeeze Bottle	719692-022183	12	28 lbs	96	2 years	
	CARPET	900	4 gal	Plastic Pail	719692-001492	1	42 lbs	48	2 years
		722	1 gal	Plastic F-Style	719692-001362	4	45 lbs	48	2 years
		710	1 qt	Squeeze Bottle	719692-001331	12	26 lbs	48	6 months
1 gal			Plastic F-Style	719692-001348	4	34 lbs	48		
Edge-Lock		8 oz	Squeeze Bottle	719692-023982	12	8 lbs	60	6 months	
SPECIALTY	2025	1 gal	Plastic F-Style	719692-021025	4	37 lbs	48	2 years	
		4 gal	Plastic Pail	719692-015772	1	37 lbs	48		

STORAGE REQUIREMENTS

All TAYLOR products should be stored in their original container, unopened, at temperatures between 50-90°F (10-32° C). While these products are freeze-thaw stable, it is necessary to protect them from freezing. Freeze/thaw stable to 10°F (-12°C).



Scan for complete product information.

ADDITIONAL ITEMS

CATEGORY	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	SHELF LIFE
RESILIENT	2037	1 gal	Plastic Pail	719692-021117	4	38 lbs	45	2 years
		4 gal	Plastic Pail	719692-021049	1	38 lbs	48	
	501	1 gal	Plastic Pail	719692-002260	2	13 lbs	75	1 year
CARPET	2070	4 gal	Plastic Pail	719692-001737	1	42 lbs	48	2 years
	2055	4 gal	Plastic Pail	719692-001676	1	44 lbs	48	2 years
	2089	4 gal	Plastic Pail	719692-016304	1	44 lbs	48	2 years
	757	1 gal	Metal Container	719692-001423	4	35 lbs	45	1 year
		4 gal	Metal Pail	719692-001430	1	40 lbs	48	
	720	1 gal	Metal F-Style	719692-001355	4	33 lbs	60	1 year
	720-C	1 gal	Metal F-Style	719692-016427	4	33 lbs	60	1 year
	775	1 qt	Metal Container	719692-001461	12	25 lbs	60	1 year
	775-C	1 qt	Metal Container	719692-015598	12	25 lbs	60	1 year
	700	1 gal	Metal Container	719692-001317	4	29 lbs	45	1 year
SPECIALTY	901	1 gal	Plastic Pail	719692-014027	4	54 lbs	45	1 year
		3.5 gal	Plastic Pail	719692-010357	1	48 lbs	48	
	1N	1 qt	Metal Container	719692-002086	12	23 lbs	48	1 year
		1 gal	Metal Container	719692-002093	4	29 lbs	45	
		4 gal	Metal Pail	719692-002109	1	32 lbs	48	
	1N-C	1 pt	Metal Container	719692-015543	12	13 lbs	60	1 year
		1 gal	Metal Container	719692-015567	4	29 lbs	45	
		4 gal	Metal Pail	719692-015574	1	32 lbs	48	
	725	12 oz	Aerosol Spray	719692-016779	12	16 lbs	48	1 year
	18" Roller Cage Frame	18"	Flexible Cage	719692-023180	18	18.2 lbs	16	N/A
	18" Roller Cover - Microfiber	18"	Microfiber Cover	719692-023203	6	2.2 lbs	100	N/A
	18" Roller Cover - Woven	18"	Woven Cover	719692-023197	6	2.2 lbs	100	N/A
	Taylor Shield	40"x50'	Shrink-wrapped Roll	877347-002789	16	80 lbs	4	N/A
	Taylor Guard	36"x100'	Roll	N/A	1	24 lbs	44	N/A
OdorGhost™ + UV	1 gal	Plastic F-Style	719692-023869	4	36 lbs	36	1 year	
OdorGhost™	1 gal	Plastic F-Style	719692-023852	4	36 lbs	36	1 year	


PRODUCTION CODE KEY

SAMPLE CODE: **D2C2325**

- D**2C2325 = The first character designates where the product was manufactured
Example: **D** = Dalton **F** = Fontana **A** = Alvarado
- D****2**C2325 = The second character designates the year of manufacture
Example: **9** = 2019 **0** = 2020 **1** = 2021 **2** = 2022
- D2****C**2325 = The third character designates the month of manufacture
Example: **A** = Jan **B** = Feb **C** = March **D** = April
- D2C****2325** = The last four numbers are the product's part number

Taking **TAYLOR** With You Every Step™

We offer the most user-friendly, digital experience in our industry. Visit us online or download our app to stay up-to-date on all things TAYLOR.

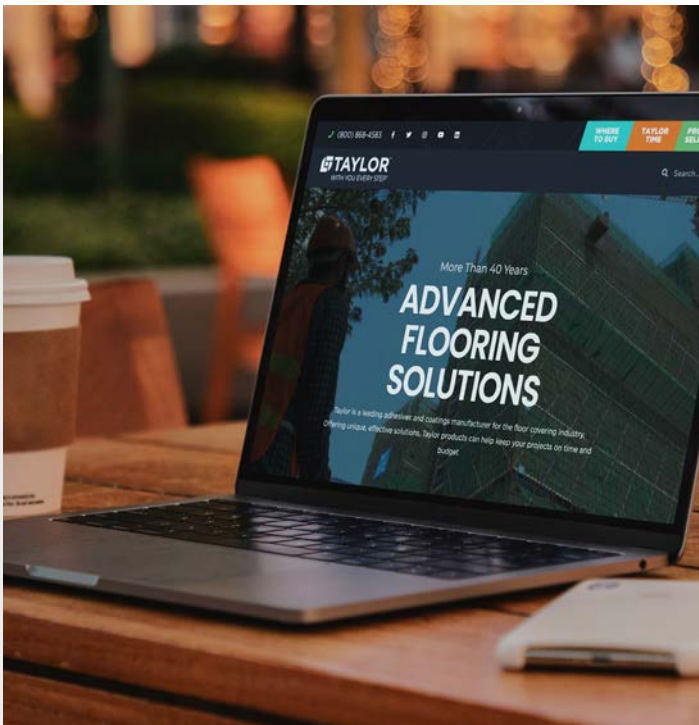


TOP WEBSITE FEATURES

- ✓ Product downloads
- ✓ Access to TAYLOR TIME
- ✓ WHERE TO BUY Interactive map
- ✓ Clean, modern design
- ✓ Easy-to-navigate



VISIT US ONLINE

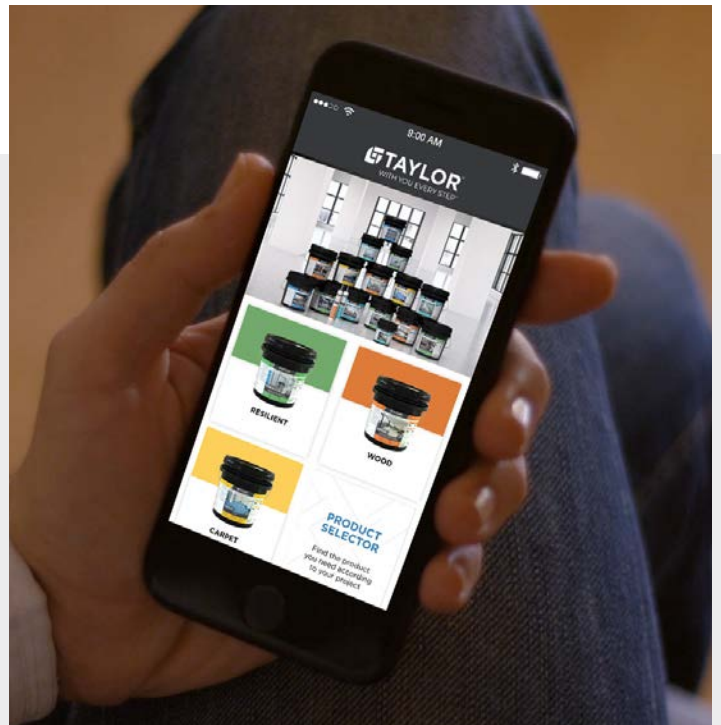

TOP APP FEATURES

- ✓ Offline access to documents
- ✓ One-touch contact (call/email)
- ✓ Automatic updates
- ✓ Product Selector Tool
- ✓ Easy-to-navigate



DOWNLOAD OUR APP



VISIT TAYLOR TIME

Make Your **TIME** Worth More

By making TAYLOR TIME part of your schedule, you can learn valuable information and insider skills you won't find anywhere else.



TAYLOR TIME NEWS

Install tips, industry topics and other relevant news.



TAYLOR TIME LIVE

Live webinars featuring industry experts with Q&A.



TAYLOR TIME TIPS

Short videos focused on specific installation topics.



TAYLOR TIME PARTNER EXCLUSIVE

Custom webinar training designed for your team.



TAYLOR TIME TECH

Bulletins and articles issued by our technical team.



THE TECHNICAL DEPARTMENT

At TAYLOR, we are dedicated to the training and success of installers, sales representatives, and the entire flooring industry. Our experienced technicians possess the knowledge and expertise that help uphold our brand promise of being With You Every Step™.

HOW OUR TECHNICAL TEAM CAN HELP

No matter where you are, our Technical Team is here to help. We can host you at our facility, come to your job-site or locations, or assist you through digital options.

Technical Department Hours: Monday - Friday 8am to 8pm EST

- T³C (Taylor Technical & Training Center)
- Flooring manufacturing plants
- Flooring manufacturer testing facilities
- Distributor locations
- On-site locations
- Email/text
- On-call 706-712-5823
- Video chat
- Live webinars
- Installation videos
- How-to videos
- Bilingual support

WHAT'S INSIDE OUR T³C*

Located in Dalton, GA, our T³C serves as a central support hub and an extension of our customers technical departments. Inside our T³C facility you will find the following:

- State-of-the-art classroom
- Product testing rooms
- Hands-on application areas
- Custom rolling-load testing lab
- Moisture modules
- Environmental chamber
- TAYLOR TIME studio
- Conference room
- Shipping/Receiving center
- Technical team offices



*T³C = Taylor Technical & Training Center

TECHNICAL TEAM SERVICES

Our product testing, troubleshooting and training often make the difference between success and failure. English and Spanish technical support are available throughout North America.



PRODUCT TESTING

Our adhesive products:

- RH - Moisture tolerance
- MVER - Moisture vapor transmission
- pH - alkali tolerance
- Viscosity/spread-ability
- Temperature tolerance
- Traffic times
- Peel/sheer strength
- Bond strength
- Compatibility/performance
- Rolling load testing

Your flooring products:

- Strength
- Dimensional stability
- Plasticizer migration
- Moisture tolerance
- Environmental performance (heat, cold, humidity)



TROUBLESHOOTING

On-and-off site:

- Moisture issues
- Substrate history
- Substrate conditions
- Substrate preparation
- Adhesives/coatings
- Flooring materials
- Warranty coverage
- Job-site inspections
- Compatibility
- Peaking, gapping, cupping



TRAINING

In-person or remote:

- Product knowledge
- Installation skills
- Best practices
- General knowledge
- Installation techniques
- Product selection
- Substrate preparation
- Adhesive application
- Terminology
- Acclimation
- Custom sessions
- How-to-videos

WHAT MAKES TAYLOR **MORE** THAN A SUNDRY

At TAYLOR, we are made different. We provide **MORE** than just quality products; we deliver an unrivaled level of partnership. Sundries are just that...Sundries. We strive to be the vital accessory that is essential to your **SUCCESS, REPUTATION, PROFITABILITY, GROWTH, and IMAGE.**

sundry /'sendre/noun
various items not important enough
to be mentioned individually.



Scan to hear
more from
our President

accessory /ek'ses(e)re/noun
an item which can be added to
something else in order to make it
more useful, versatile, or attractive.



Our Partnership
Approach to Business



Our World-Class
Service



Our Industry-Leading
Technology



Our Unparalleled
Product Confidence



Our Best-in-Class
Marketing and
Technical Support

WHAT MAKES TAYLOR AN INDUSTRY LEADER

As an industry leader, the success of our clients drives our momentum and growth. Everything about us is designed to serve them, ensuring a successful partnership. The following services are available for our Private Label partners, and many are accessible to our Distribution Network as well.

WHO WE ARE

- **Trusted industry leader for over 40 years**
- **Proven history of innovation** (see pages 4-5)
- **Specialists in adhesives & coatings**
- **Focused on sustainability**
- **Top-rated brand for 15 consecutive years**
- **A vital accessory** (see left-hand page)
- **The Flooring Division of the Meridian Adhesives Group**

HOW WE APPROACH BUSINESS

- **Highly collaborative**
- **Partner-centric**
- **Open and transparent communication**
- **Dedicated to industry training & education**

MANUFACTURING & DISTRIBUTION

- **3 TAYLOR manufacturing facilities** (CA, GA, TX)
 - Warehousing & shipping - FOB
 - Strategic location access (rail, interstate)
- **Distribution options** (shipping, pricing, inventory)
 - FOB - 3 Canadian warehouses
 - FOB - 10 Meridian warehouses
 - FOB - TAYLOR wholesale distributors
 - Hybrid programs available

ACCOUNT MANAGEMENT

- **World-class service and quality**
- **Outstanding management and support**
- **Collaboration on promotional opportunities**
- **Partnership approach**
- **Responsive customer support**

R&D DEPARTMENT

- **Discovery and consulting**
- **Ongoing product innovations**
- **Product development**
- **Quality control management**
- **Certifications and sustainability**

TECHNICAL DEPARTMENT

 (see pages 48-49)

- **Product testing** (flooring, adhesives, coatings)
- **Troubleshooting** (on-site, in-person, remote)
- **Product training** (on-site, in-person, remote)
- **Technical assistance** (on-site, in-person, remote)
- **Bi-lingual support** (English/Spanish)

MARKETING DEPARTMENT

- **Strategy consulting**
 - Go-to-market planning
 - Brand updates and transitions
- **Packaging/labeling**
 - Consulting
 - Product naming strategy
 - Colors, fonts, images, icons, etc.
 - Layout, design, execution
 - Translation services (additional fees may apply)
 - Review services
 - Finished product renders (3-D)
- **Collateral services**
 - Design, consulting, production, review
 - › Product highlight sheets
 - › Technical data sheets
 - › Safety Data Sheets (SDS)
 - › Warranty documents
 - › Flyer's/promotional materials
- **Video services** (additional fees may apply)
 - Consulting
 - Script generation
 - Filming
 - Directing
 - Producing
 - Post-production editing
- **Mobile app services** (additional fees may apply)
 - Consulting
 - Wire frame creation
 - Programming and implementation
- **TAYLOR TIME**
 - PARTNER EXCLUSIVE virtual training events
 - LIVE
 - TIPS

TAYLOR™

WITH YOU EVERY STEP™



DISTRIBUTED BY:

 800.868.4583

 tayloradhesives.com

 800 College Drive, Dalton, GA 30720

 A Meridian Adhesives Group Company

© 2021 Taylor Adhesives. All rights reserved.

