

EXLINE

COMPANY LIMITED

PRODUCT CATALOG

**ADD : 253 ASOKE BUILDING 28TH FLOOR,
ASOKE ROAD, SUKHUMVIT SOI 21, KLONGTOEY NUA, WATTANA, THAILAND.
TEL : +66-2-664 2310 , 02-664 2311
FAX : +66-2-664 2312
Email : info@exlineco.com
www.exlineco.com**

Features

- Ultra-thin Slice led panel light, IK06 IP54 approved
- CE, RoHS Certified
- Material: High-quality Aluminum + PMMA
- Efficacy (IES): 100lm/w $\pm$ 10%, Up to 125lm/w $\pm$ 10%
- Input Voltage: DC30-42V
- Support 1-10V dimming,DALI dimming driver
- Ultra narrow frame,Support UGR<19
- Instant on/off, edge-lit, no dark area, anti-yellowing
- High CRI: Ra>80, SDCM<4
- L80B50 Lifespan(Ta=25°C): 50,000hrs, Warranty: 5 years
- CCT: 3000K: 3045 $\pm$ 175K, 4000K: 3985 $\pm$ 275K, 5000K: 5029 $\pm$ 283K, 6000K: 6065 $\pm$ 415K
- Suspending&Ceiling&Surface mounted&Recessed installation
- Application: Office / Hospital / University / School / Supermarket / Show room / Exhibition hall



Data Sheet

Article Number	Dimension (mm)	Power (W)	Lumen (lm)
SL-P1112-X-26B	295*295*7	12	1100
SL-P1225-X-26B	295*595*7	25	2500
SL-P2240-X-26B	595*595*7	40	4000
SL-P2240-X-26B2	620*620*7	40	4000
SL-P1440-X-26B	1195*295*7	40	4000
SL-P2460-X-26B	1195*595*7	60	6000

*The "X" represents CCT, it can be W(3000K/4000K), P(5000K), C(6000K)

Light Source	SMD2835/4014
CRI	>80
Beam Angle	120°
CCT	3000K/4000K/5000K/6000K
DC Input	30-42V
SDCM	<4
Waterproof	IP54
IK Rate	IK06
Warranty	5 Years
Operating Temperature	-20~+40°C


Efficacy Version

Cover	Standard	Premium
Frosted	100lm/w	125lm/w

Please note:


1. Above efficacy based on 4000K
2. All values are based on an ambient temperature of 25°C
3. Efficacy tolerance is $\pm$ 10% and wattage tolerance is $\pm$ 10%
4. UGR<19 light efficiency will be reduced by 5-8%
5. IP54 waterproof just for front

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

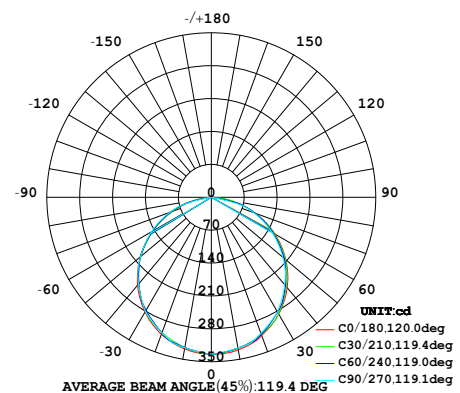


Wiring details


1 Standard version

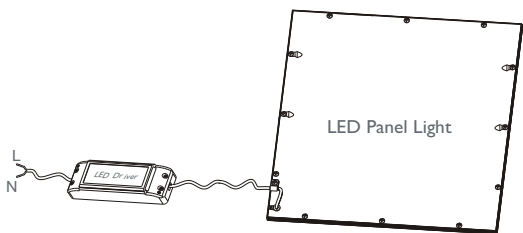


2 1-10V dimming version

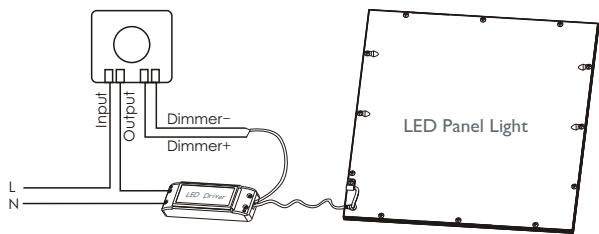

3 DALI dimming version

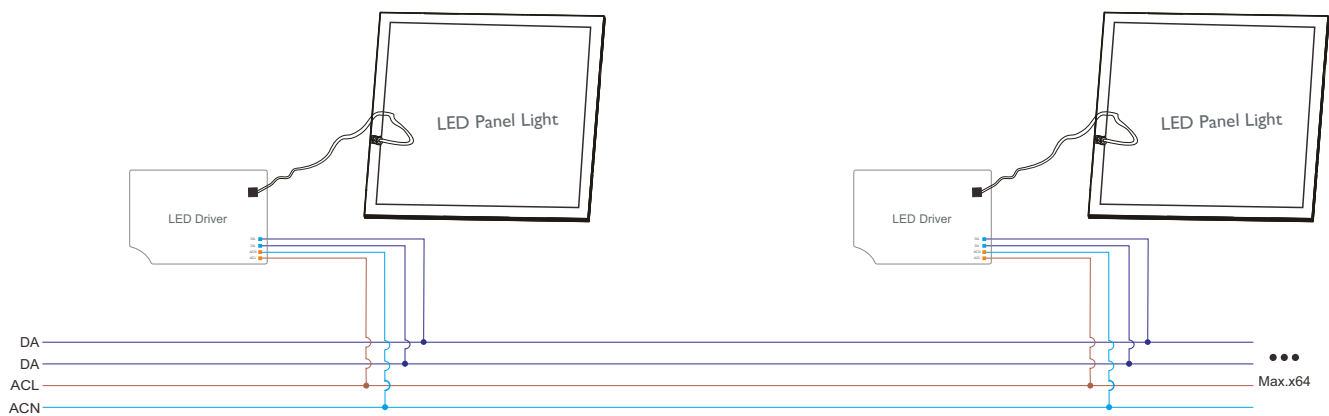


Dimension

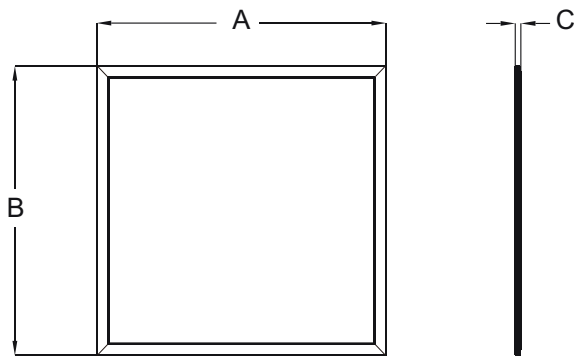

Length ——	A		B		C
	Min.mm	Max.mm	Min.mm	Max.mm	Min.mm
295x295	295	296	295	296	7
295x595	295	296	595	596	7
595x595	595	596	595	596	7
620x620	620	621	620	621	7
1195x295	1195	1196	295	296	7
1195x595	1195	1196	595	596	7


Packaging

Length	Carton Size (6pcs/ctn)	N.W.(CTN)	G.W.(CTN)	20'GP	40'GP	40'HQ
295*295*7mm	350X145X350mm	6.5kg	8kg	8424pcs	17424pcs	20328pcs
295*595*7mm	650X145X350mm	11kg	12.5kg	4572pcs	9612pcs	11214pcs
595*595*7mm	650X145X650mm	16kg	18kg	2286pcs	4806pcs	6408pcs
620*620*7mm	675X145X650mm	17kg	20kg	2232pcs	4644pcs	4644pcs
1195*295*7mm	1250X145X350mm	16kg	18kg	2196pcs	4716pcs	5502pcs
1195*595*7mm	1250X145X650mm	28kg	30kg	1098pcs	2358pcs	3144pcs

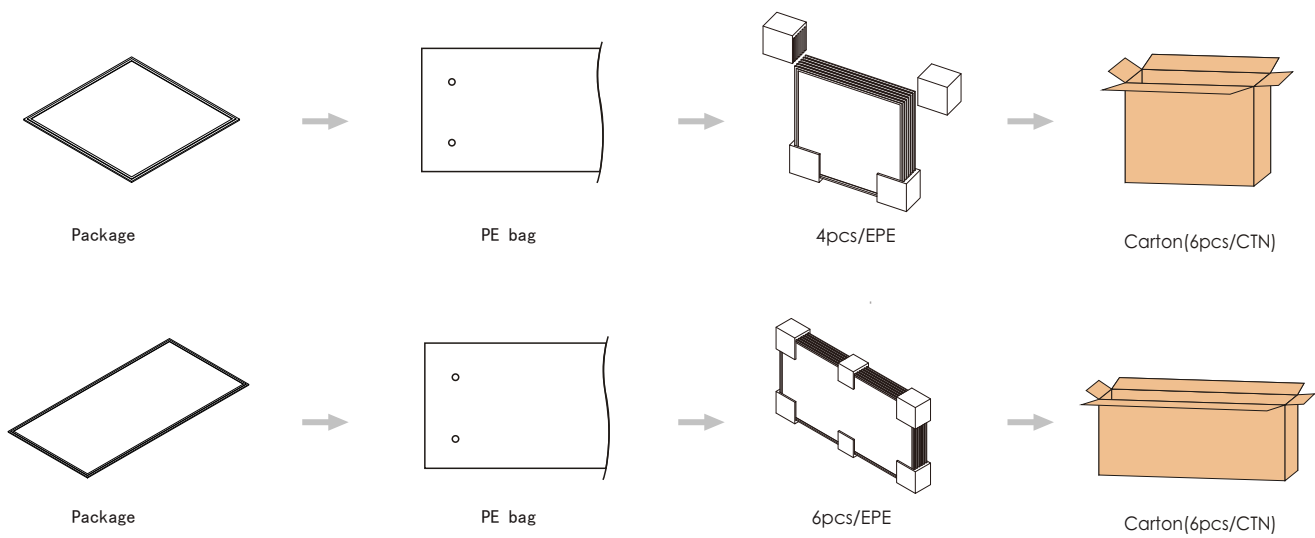


Installation


Ceiling Installation

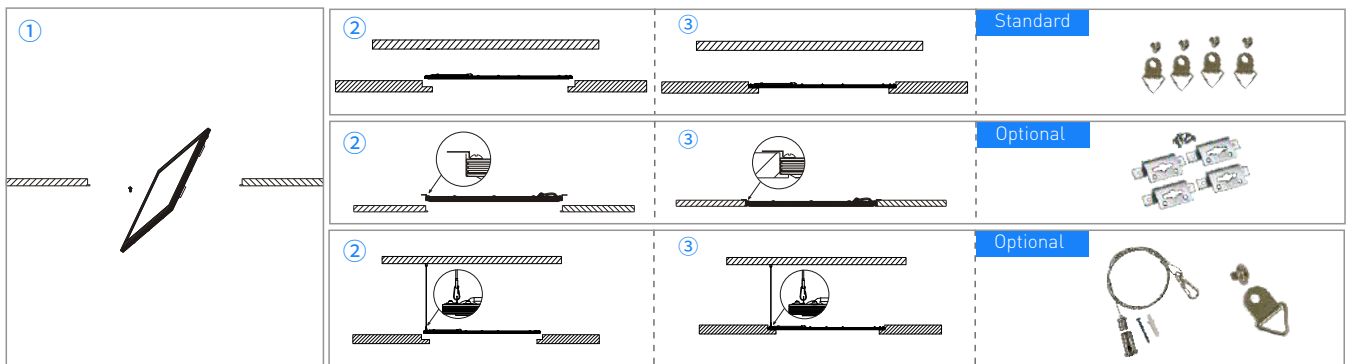


Suspending Installation

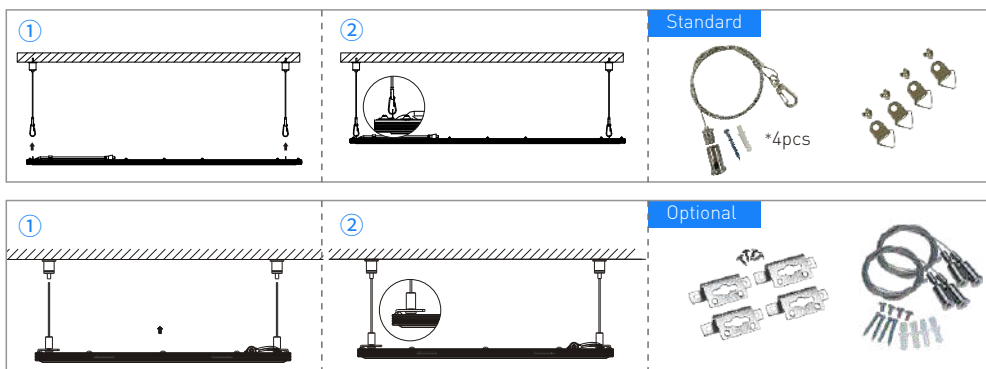

Surface mounted Installation

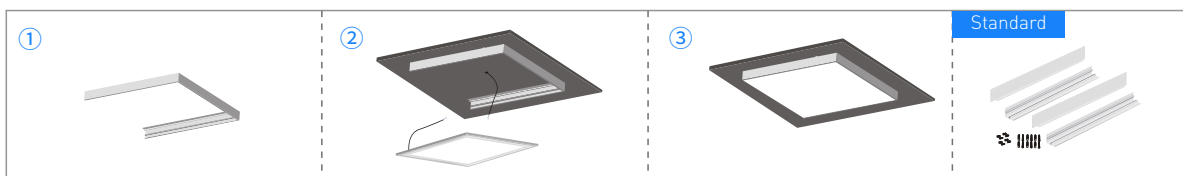

Recessed Installation

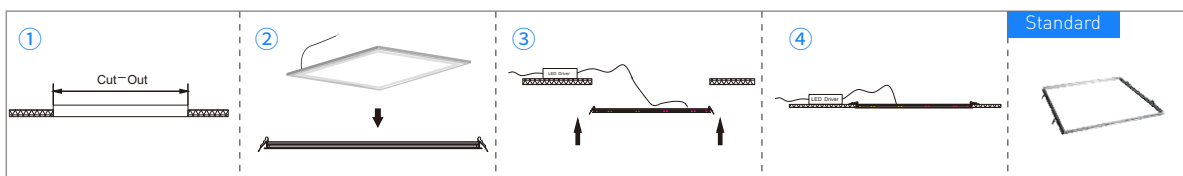

PLS NOTE: Recessed installation is ShineLong standard configuration. Suspended or surface mounted installation will be charged additionally by hanging ropes or mounted frame.



All the operations must be in the condition of power off



The luminaires are intended for indoor use or under shelter for outdoor use.

Applications



Office



Bathroom




Supermarket



Office



Auditorium

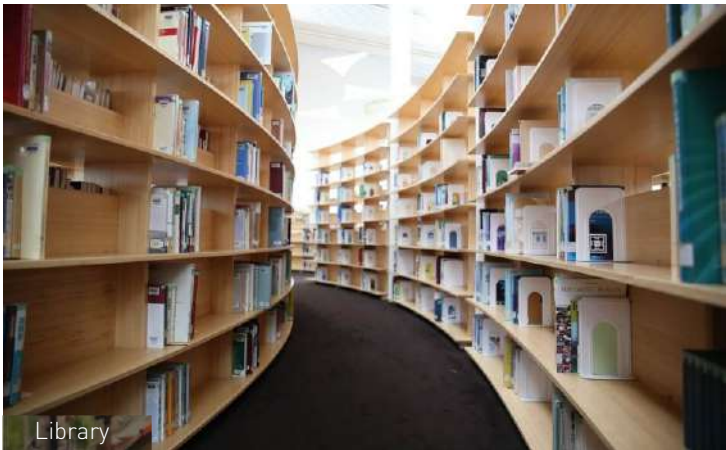

Library



Supermarket



School