

POLYCAB

YOUR CONNECTION TO A SAFER FUTURE

HOUSE WIRES & CABLES PRICELIST



ABOUT POLYCAB INDIA LTD.

Polycab India Limited (PIL) is India's largest manufacturer of Wires and Cables and one of the fastest growing FMEG companies with a consolidated turnover of INR 180+ Bn in FY24. PIL is at the forefront of providing innovative, safe and energy efficient products to a diverse set of customers via a strong distribution network of 3,800+ authorized dealers and 205,000+ retail outlets. PIL's business operations span across India through 27 manufacturing facilities, 13 offices and 29 warehouses. PIL has also served customers in 79 countries globally. PIL's 4,800+ employees are dedicated to upholding robust governance practices, preserving a customer centric culture, having a purpose to serve the communities, and imbibing a genuine sense of ecological consciousness. For further information, please visit www.polycab.com



INDIA'S WIDEST RANGE OF WIRES & CABLES

We manufacture and sell a diverse range of wires and cables and our key products in this segment are power cables, control cables, instrumentation cables, solar cables, building wires, flexible cables, flexible single/multi core cables, communication cables and others including welding cables, submersible flat and round cables, rubber cables, overhead conductors, railway signalling cables and specialty cables. We strive to deliver customized and innovative products with speed and quality service. Our production process is designed to ensure quality while delivering the ability to produce complex electrical products on short timeframes to meet our customers' needs.



INNOVATION & SUSTAINABILITY

Polycab's house wires epitomize innovation and sustainability. We've invested heavily in research and development to create products that cater to our customers' dynamic needs while maintaining a strong commitment to safety and the environment. Polycab house wires are made from lead free non-carcinogenic raw materials. They meet stringent European norms of RoHS and REACH compliance. Our R&D team is dedicated to pioneering ground-breaking solutions, with a focus on customer safety. We're proud to have engineered insulating compounds that ensure safety during fire emergencies and also possess a high oxygen index and low smoke properties to set up a new standard for safety and environmental responsibility.



QUALITY FOCUS

Our manufacturing facilities are accredited with quality management system certificates for compliance with ISO 9001, ISO 14001 and OHSAS 18001 requirements.

Our products are also certified to be compliant with various national and international quality standards including Bureau of Indian Standards 'BIS', British Approvals Service for Cables 'BASEC', US Underwriters Laboratory, FQC and international electrotechnical commission 'IEC'.





POLYCAB GREEN WIRE+

INDIA'S 1ST GREENPRO
CERTIFIED HOUSE WIRES
HR FR-LSH LF

POLYCAB GREEN WIRE+ PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING		
	LP (₹)	COILS PER CARTON	AVAILABLE COLOURS
0.75	2210	28	Rd, Yw, Be, Bk, Gn, We
1	2980	24	Rd, Yw, Be, Bk, Gn, We
1.5	4350	16	Rd, Yw, Be, Bk, Gn, We
2.5	6825	12	Rd, Yw, Be, Bk, Gn, We
4	9960	8	Rd, Yw, Be, Bk, Gn
6	14950	6	Rd, Yw, Be, Bk, Gn

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - HEAT RESISTANT FLAME RETARDANT LOW SMOKE LOW HALOGEN - LEAD FREE CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

FEATURES



30% HIGHER
HEAT RESISTANCE



35%* HIGHER CURRENT
CARRYING CAPACITY



RELEASE LOW SMOKE
& LOW TOXIC GASES



LEAD FREE
PVC INSULATION



RODENT
PROTECTION



MOISTURE
RESISTANT



HIGH ABRASION
RESISTANCE



ENERGY SAVING
CONSTRUCTION



ECO-FRIENDLY
WIRING



REACH
COMPLIANT



RoHS
COMPLIANT



99.97%
PURE COPPER



POLYCABOPTIMA+

HIGH QUALITY MATERIALS,
POWER SAVING DESIGN

LF FR

POLYCABOPTIMA+ PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING		
	LP (₹)	COILS PER CARTON	AVAILABLE COLOURS
0.75	2080	28	Rd, Yw, Be, Bk, Gn, We, Gy
1	2790	24	Rd, Yw, Be, Bk, Gn, We, Gy
1.5	4080	16	Rd, Yw, Be, Bk, Gn, We, Gy
2.5	6455	12	Rd, Yw, Be, Bk, Gn, We, Gy
4	9445	8	Rd, Yw, Be, Bk, Gn
6	14115	6	Rd, Yw, Be, Bk, Gn
10	24100	1	Rd, Yw, Be, Bk, Gn
16	38050	1	Rd, Yw, Be, Bk, Gn

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - LEAD FREE FLAME RETARDANT (LF FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

FEATURES

- 

FLAME
RETARDANT
- 

LEAD FREE
PVC INSULATION
- 

RODENT
PROTECTION
- 

MOISTURE
RESISTANT
- 

HIGH ABRASION
RESISTANCE
- 

ENERGY SAVING
CONSTRUCTION

- REACH
COMPLIANT
- RoHS
COMPLIANT
- 99.97%
HIGH PURITY
COPPER



POLYCABPRIMMA

FLAME RETARDANT LEAD FREE WIRES

LF FR

POLYCABPRIMMA PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING		
	LP (₹)	COILS PER CARTON	AVAILABLE COLOURS
0.75	2060	28	Rd, Yw, Be, Bk, Gn, We, Gy
1	2640	24	Rd, Yw, Be, Bk, Gn, We, Gy
1.5	3840	16	Rd, Yw, Be, Bk, Gn, We, Gy
2.5	6120	12	Rd, Yw, Be, Bk, Gn, We, Gy
4	9385	8	Rd, Yw, Be, Bk, Gn
6	14075	6	Rd, Yw, Be, Bk, Gn

POLYCABPRIMMA PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - LEAD FREE FLAME RETARDANT (LF FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

FEATURES

- 

99.97%
HIGH PURITY
COPPER
- 

FLAME
RETARDANT
- 

LEAD FREE
PVC INSULATION
- 

RODENT
PROTECTION
- 

MOISTURE
RESISTANT
- 

HIGH ABRASION
RESISTANCE
- 

EASY TO PULL
INSIDE CONDUITS

REACH
COMPLIANT

RoHS
COMPLIANT



ETIRA

TRUSTED QUALITY,
ASSURED PERFORMANCE

ETIRA PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING		
	LP (₹)	COILS PER CARTON	AVAILABLE COLOURS
0.75	1930	28	Rd, Yw, Be, Bk, Gn, We, Gy
1	2505	24	Rd, Yw, Be, Bk, Gn, We, Gy
1.5	3690	16	Rd, Yw, Be, Bk, Gn, We, Gy
2.5	5890	12	Rd, Yw, Be, Bk, Gn, We, Gy
4	8805	8	Rd, Yw, Be, Bk, Gn
6	13540	6	Rd, Yw, Be, Bk, Gn
10	24100	1	Rd, Yw, Be, Bk, Gn
16	38050	1	Rd, Yw, Be, Bk, Gn

ETIRA PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - FLAME RETARDANT (FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

FEATURES



FLAME RETARDANT



99.97% COPPER




EASY TO PULL
INSIDE CONDUITS

REACH
COMPLIANT

RoHS
COMPLIANT

180M POUCH PACKAGING

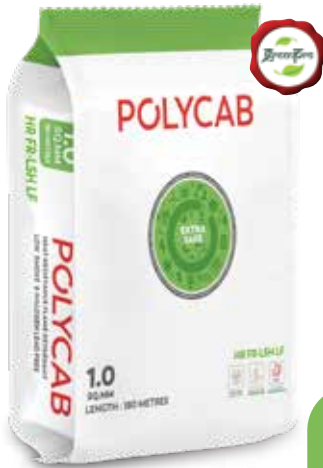

FEATURES


LOW SMOKE
DURING EXTREME
FIRES


LOW TOXIC
FUMES


LEAD FREE
PVC INSULATION


HIGH ABRASION
RESISTANCE


RODENT
PROTECTION

 FLAMESTOP
TECHNOLOGY

REACH
COMPLIANT

RoHS
COMPLIANT

99.97%
HIGH PURITY
COPPER

POLYCAB GREEN WIRE PRICELIST

SIZE (SQ.MM.)	180 METER POUCH PACKAGING		
	LP (₹)	COILS PER CARTON	AVAILABLE COLOURS
1	5960	12	Rd, Yw, Be, Bk, Gn, We
1.5	8700	10	Rd, Yw, Be, Bk, Gn, We
2.5	13650	6	Rd, Yw, Be, Bk, Gn, We
4	19920	4	Rd, Yw, Be, Bk, Gn
6	29900	3	Rd, Yw, Be, Bk, Gn

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - HEAT RESISTANT FLAME RETARDANT LOW SMOKE LOW HALOGEN - LEAD FREE CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS



FEATURES

 FLAMESTOP
TECHNOLOGY

 LEAD FREE
PVC INSULATION

 RODENT
PROTECTION

REACH
COMPLIANT

RoHS
COMPLIANT

99.97%
HIGH PURITY
COPPER

POLYCAB LF FR PRICELIST

SIZE (SQ.MM.)	180 METER POUCH PACKAGING		
	LP (₹)	COILS PER CARTON	AVAILABLE COLOURS
1	5580	12	Rd, Yw, Be, Bk, Gn, We
1.5	8160	10	Rd, Yw, Be, Bk, Gn, We
2.5	12910	6	Rd, Yw, Be, Bk, Gn, We
4	18890	4	Rd, Yw, Be, Bk, Gn
6	28230	3	Rd, Yw, Be, Bk, Gn

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - LEAD FREE FLAME RETARDANT (LF FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS



INSTANT **SCAN** INSTANT **MONEY**

Join the EXPERTS APP by scanning the QR code.
Only for retailers and electricians.

STEPS TO EARN



REGISTER



SCAN



EARN

To Register yourself in the **Polycab Experts Loyalty Program**

Reach out to your Polycab Sales Team Family call on **1800 419 1091**

TERMS AND CONDITIONS APPLY

- The above rates are exclusive of GST which shall be charged extra.
- This pricelist is subject to change without notice.
- As per international practice which is also adopted by the Bureau of Indian Standards, the diameter of the conductor shown herein is nominal; the size of the conductor is determined by its resistance. The construction of the conductor is as per market convention and should be treated as a guideline only. It may vary within the limits of IS 8130:1994 with its related classes & tables.

POLYCAB

CORPORATE OFFICE

POLYCAB INDIA LIMITED

#29, The Ruby, 21st Floor, Senapati Bapat Marg,
Tulsi Pipe Road, Dadar (West),
Mumbai – 400 028, Maharashtra (India)
Ph.: +91-22-2432 7070/4, 6735 1400

enquiry@polycab.com | Toll Free No: 1800 267 0008 | www.polycab.com

FOLLOW US ON

