



# Business Two-way Radio S1 mini Tiny. Mighty.




Hytera S1 mini is a tiny business-ready analog radio for restaurant, book store, or beauty salon, and more. It blends fashion and communication like never before—first-of-its-kind design, minimalist style, reliable PTT service, superb audio, long-lasting battery, and more. This radio helps you better stay connected with your team while staying focused on your customers.



# S1 mini



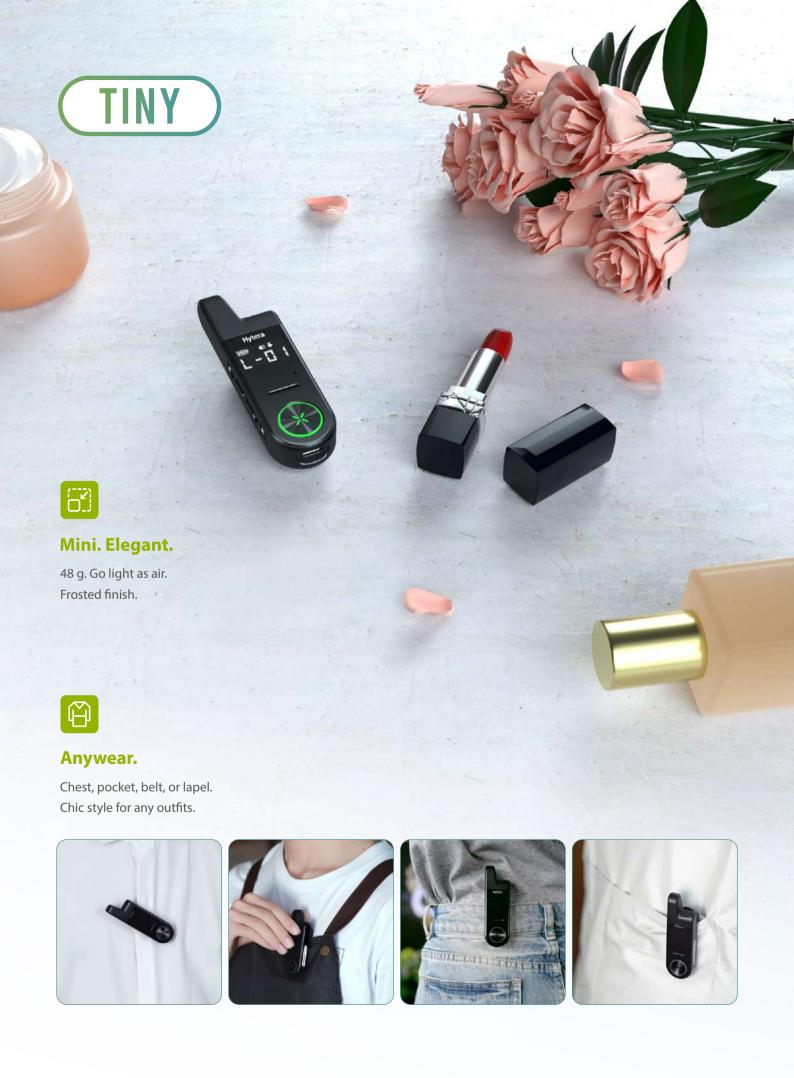








\* The communications distance is subject to the actual environments.



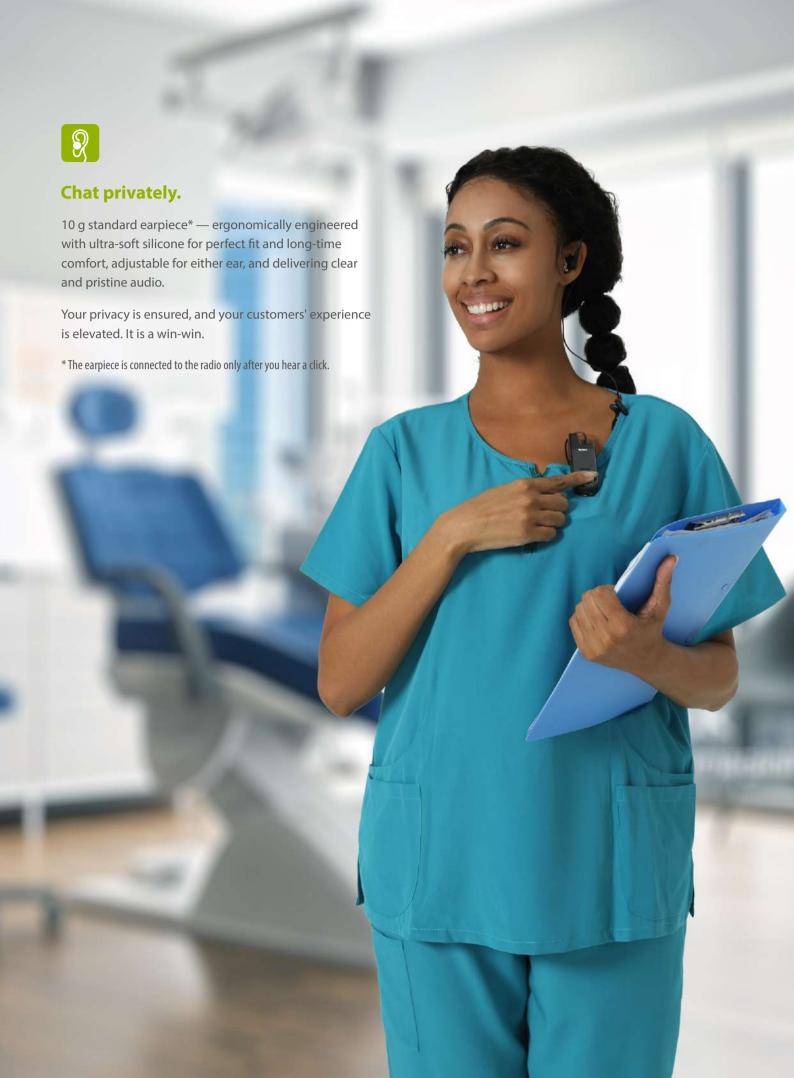







#### Simple management.

Hytera Radio app on your phone, a high-efficient radio manager.



Download APP Now











#### Hear it. Get it.

Always give you voice notifications about channel number, battery level, configuration data, and more.

Get key information without any glance.



# **Application Scenarios**









Restaurant Cafe Bookstore Beauty Salon

# **Specifications**

General		
Model	HYT-S10	
Frequency Range	400-440 MHz, 430-470 MHz	
Channel Capacity	16	
Zone Capacity	1	
Channel Capacity per Zone	16	
Channel Spacing	12.5kHz/20kHz/25kHz	
Operating Voltage	3.8 V (Rated)	
Battery	750mAh Li-Polymer	
Battery Life	1471	
(5/5/90 Duty Cycle, TX Power)*	With earpiece: 16 hrs (1W)	
Frequency Stability	±2 ppm	
Antenna Impedance	50 Ω	
Dimensions (H×W×D)	99×30×16mm (Without belt clip)	
Weight (with battery and antenna)	48 g	
Display	0.88 inch	
BT	BLE (only data) 5.0	

0.14µV
ETSI: 60dB@12.5kHz/70dB@20/25kHz
ETSI: 65dB@12.5/20/25kHz
ETSI: 70dB@12.5/20/25kHz
ETSI: 84dB
40dB@12.5kHz
43dB@20kHz
45dB@25kHz
0.5W
≤5%
+1 to -3dB
<-57dBm

Transmitter	
Power Output	400-440 MHz, 430-470 MHz: 1W
FM Modulation	11K0F3E@12.5kHz; 14K0F3E@20kHz; 16K0F3E@25kHz
Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz
Modulation Limiting	±2.5kHz@12.5kHz; ±4.0kHz@20kHz; ±5.0kHz@25kHz
FM Hum&Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Adjacent Channel Power	60dB@12.5kHz; 70dB@20/25kHz
Audio Response	+1 to -3dB
Audio Distortion	≤3%

Environment	
Operating Temperature	0°C ~ +55°C
Storage Temperature	-30°C ~ +70°C
ESD	±4kV (Contact)
	±8kV (Air)

#### \* Data comes from Hytera labs. Actual battery life will vary.


### **Accessories**







## 30 years of radio communications, beyond.

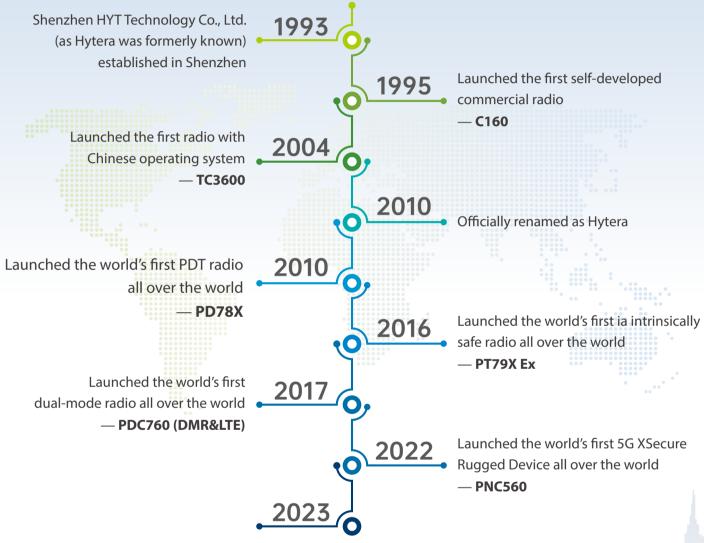

Hytera serves 20 million users for public safety, firefighting, railway, airports, factories, hotels, supermarkets, and more industries home and abroad.



#### **Hytera Communications Corporation Limited**

Stock Code: 002583.SZ

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, P.R.C









Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.