



AquaZoom

High Pressure, High Recovery RO Modules

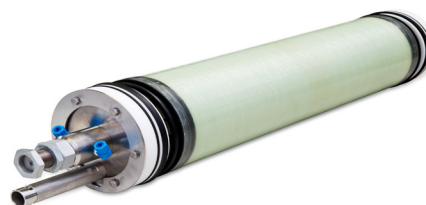

Spacer Tube (ST) RO4 Element Specifications

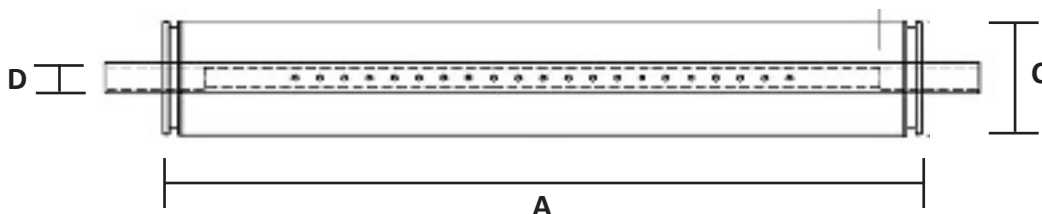

Product Summary

Model	RO4-8035MF-7G3F-2
Membrane Type	RO4; Low Energy, Seawater RO Membrane
Construction ¹	Spiral Wound Element with FRP Outerwrap and Brine Seal
Applications	High Dissolved Solids Rejection, High Pressure
Element Length with ATD ("A")	838 mm (33 in)
Element Diameter ("C")	200 mm (7.9 in)
Permeate Tube Outer Diameter ("D")	60.3 mm (2.4 in)
Permeate Flowrate ²	14.7 m ³ /d (3,888 gpd)
Nominal Rejection ²	99.5%
Minimum Rejection ²	99%
Membrane Area	23.9 m ² (257 ft ²)
Feed Spacer	Proprietary Design
Element Dry Weight	12 kg (26.5 lb)
Maximum Element ΔP	1.2 bar (17.4 psi)
Maximum Inlet Pressure	120 bar (1,740 psi)
Maximum Temperature (Process; CIP)	40°C (104°F) ; 45°C (113°F)
Continuous Process pH Range	3 - 11
CIP pH Range	2 - 12

¹Brine seal to be installed in flow direction on the low pressure side/element outlet side of the AquaZoom™ element.

²Performance specifications shown are nominal values. Individual module permeate flowrates may vary by $\pm 15\%$ from the values shown. Test conditions: 32,000 mg/L NaCl Solution at 55 bar (800 psi) applied pressure, 8% recovery, 25°C (77°F) and pH 8.



CrossTek
MEMBRANE TECHNOLOGY

CrossTek Membrane Technology
600 South Street
Holbrook, MA 02343 USA

+1 781 658-3340
info@crosstek.com
www.crosstek.com