


2-3/8" DIAMETER HELICAL PILE


MAXIMUM TORQUE NOT TO EXCEED
5,500FT-LBS. ULTIMATE CAPACITY IS
50 KIPS BASED ON A CAPACITY TO
TORQUE RATIO OF $k_t = 10 \text{ FT}^{-1}$

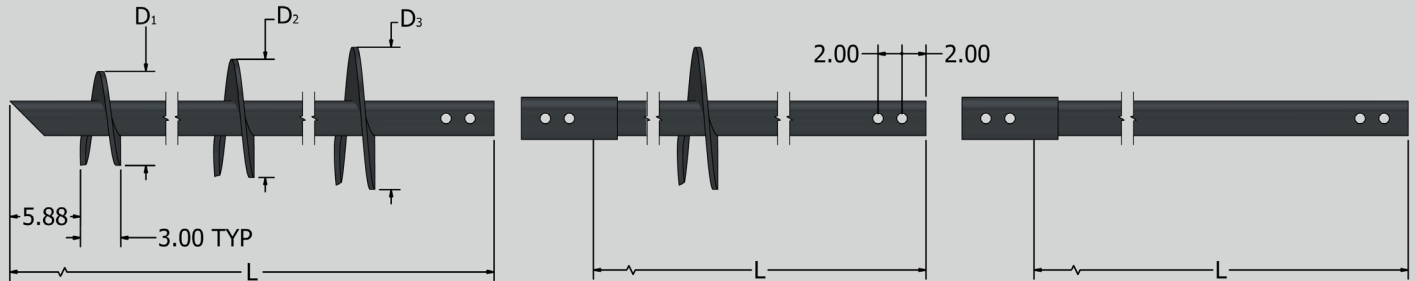

HELICAL PILE LEAD			
PART NUMBER	LENGTH (ft) A	HELIX BLADE SIZE (D ₁ -D ₂ -D ₃)	BLADE THICKNESS
SH23820028X38	2'	8"	3/8"
SH238200210X38	2'	10"	3/8"
SH23820058X38	5'	8"	3/8"
SH238200510X38	5'	10"	3/8"
DH2382005810X38	5'	8"-10"	3/8"
DH23820051012X38	5'	10"-12"	3/8"
HELICAL PILE EXTENSION			
EXT23820058X38	5'	-	-
FESH238200510X38	5'	8"	3/8"

NOTES:

1. PILE SHAFT TO MEET OR EXCEED REQUIREMENTS OF API 5CT L80, 80 KSI YIELD STRENGTH.
2. FLAT METAL TO MEET OR EXCEED REQUIREMENTS OF ATSM A572, GRADE 50.
3. LEADING EDGE OF HELICES ARE TAPERED.
4. HELIX SPACING IS THREE TIMES THE DIAMETER OF THE LOWER HELIX.
5. STANDARD HELIX DIAMETERS ARE 8", 10" AND 12".
6. STANDARD HELIX THICKNESS IS 3/8".
7. ALL WELDING TO BE PERFORMED BY CERTIFIED WELDOR IN ACCORDANCE WITH AWS D1.1 STRUCTURAL WELDING CODE.
8. HOT DIP GALVANIZING PER ASTM A153/ASTM A123. BARE STEEL IS ALSO AVAILABLE.
9. HELICAL PILE ASSEMBLIES MANUFACTURED IN ACCORDANCE WITH ICC-ES AC358 ACCEPTANCE CRITERIA FOR HELICAL FOUNDATION SYSTEMS AND DEVICES.

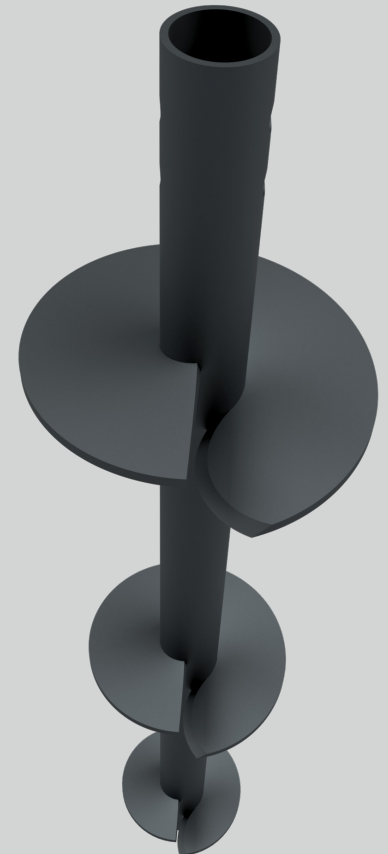

1-833-641-7111

