



3M™ Cubitron™ II Depressed Center Grinding Wheel

Thickness: 1/4 in
Grit: 36

SKU	Dia.	Speed
405-051115-78466	4-1/2 in	13,300 rpm
405-051125-87153	9 in	6,650 rpm
405-076308-64314	6 in	10200 rpm
405-076308-64317	5 in	12250 rpm
405-076308-64319	7 in	8,500 rpm
405-076308-64320	4-1/2 in	13,300 rpm



3M™ All Purpose Duct Tape DT8

Width: 1.88 in
Length: 60 yd
Thickness: 8 mil
Temp. Range: 150° F
Adhesion to Steel: 74 oz/in
Tensile Strength: 31 lb/in

SKU	Series	Color
405-689330-17225	DT8	Silver



3M™ E-A-Rsoft™ Earplugs 311-4106, Metal Detectable

Color: Red/Yellow
Type: Corded
Quantity: 200 pair per box

SKU	Noise Reduction	Body Material
247-311-4106	32 dB	Polyurethane



3M™ E-A-R™ Classic™ Earplugs

Body Material: PVC
Color: Yellow

SKU	Noise Reduction	Type	Packing Type
247-310-1001	29 dB	Uncorded	Pillow Pack
247-310-1103	29 dB	Uncorded	Pillow Pack
247-311-1101	29 dB	Corded	Poly Bag
247-312-1082	29 dB	Uncorded	Econopak
247-312-1201	29 dB	Uncorded	Poly Bag



3M™ Hi-Strength 90 CA Spray Adhesives

Adhesive Tensile Shear: 600 psi
Tensile Strength: 600 psi
Chemical Compound: Acetone
Working Time: 1 min to 10 min
Packing Type: Aerosol Can

SKU	Capacity vol.	Color
405-021200-30023	17.6 oz	Clear



3M™ Particulate Respirator 8511

Test & Approvals: Meets NIOSH 42 CFR 84 N95 Requirements, TC-84A-1299
Resistance: Dust; Non-Oil Particulates
Color: White
Suspension: Two Fixed Straps
Includes: 3M™ Cool Flow™ Valve; M Noseclip

SKU	Protected Area	Filtration Grade
142-8511	Half Facepiece	N95



3M™ Particulate Welding Respirator 8515/07189(AAD)

Test & Approvals: ASTM D2859-96; Meets NIOSH 42 CFR 84 N95 Requirements, TC-84A-0454; OSHA APF 10
Resistance: Gas/Vapor Particulates; Non-Oil Aerosol; Welding
Suspension: Stapled; Braided Head Band Straps
Includes: 3M™ Cool Flow™ Valve; Carbon Filter Material; Welding Web


SKU	Protected Area	Filtration Grade
142-8515	Half Facepiece with Adjustable Nose Clip	N95



3M™ Secure Click™ Full Facepiece Reusable Respirator

Body Material: Silicone
Resistance: Particulates; Gases; Vapors; Airborne Contaminants

SKU	Size Group
142-FF-801	Small
142-FF-802	Medium
142-FF-803	Large

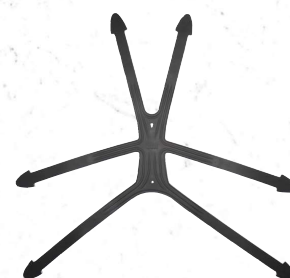

3M™ Head Harness FF-800-05

Color: Black

SKU	Type	For Model
142-FF-800-05	Head Harness	HF-800 Series; FF-800 Series

3M

3M™ Secure Click™ Quantitative Fit Test Adapter Kit FF-800-06

SKU	Type	Includes
142-FF-800-06	Fit Test Adapter	Adapter



SecureFit™ 3700 Series Safety Glasses

Lens Material: Polycarbonate
Resistance: 99.9% UV Protection

SKU	Frame Color	Lens Tint	Lens Coating/Shade
247-SF3701AS-BLU	Blue	Clear	Anti-Scratch; Clear
247-SF3701XSGAF-BLU	Blue	Clear	Scotchgard™ Anti-Fog; Clear
247-SF3730AS-BLK	Black	Gray 3.0 IR	Anti-Scratch; Gray 3.0 IR
247-SF3703SGAF-GRN	Green	Amber	Scotchgard™ Anti-Fog; Amber



3M™ SecureFit™ Safety Glasses

Lens Material: Polycarbonate
Resistance: 99.9% UV Protection

SKU	Frame Color	Lens Tint	Lens Coating/Shade
247-SF403SGAF-YEL	Black/Yellow	Amber	Anti-scratch; Scotchgard™ Anti-fog; Amber
247-SF402XSGAF-BLU	Gray/Blue	Gray	Anti-scratch; Anti-fog; Gray Shade
247-SF407XSGAF-BLU	Gray/Blue	Gray I/O	Anti-Scratch; Scotchgard™ Anti-Fog; Gray I/O
247-SF401XSGAF-BLU	Gray/Blue	Clear	Anti-scratch; Scotchgard™ Anti-fog



3M™ SecureFit™ Hard Hats

Material: HDPE
Suspension: 4 Point Ratchet
Size Group: 6-1/4 to 8

SKU	Color	Type
142-H-701SFV-UV	White	Cap; Vented
142-H-706SFR-UV	Orange	Cap
142-H-706SFV-UV	Orange	Cap; Vented
142-H-702SFR-UV	Yellow	Cap
142-H-701SFR-UV	White	Cap
142-H-702SFV-UV	Yellow	Cap; Vented



3M™ SecureFit™ Safety Helmet

Adjusting Method: Ratchet
Material: ABS
Applications: Construction; Forestry; Oil; Gas
Type: Vented; Reflective
Size Group: One Size

SKU	Color	Suspension
142-X5002VX-ANSI	Yellow	6 Point



3M™ Speedglas™ Welding Helmet 9100 06-0100-20SW

Window Size: 4.2 in x 2.1 in
Material: PPA
Suspension: Ratchet

SKU	Lens Coating/Shade	Color
Includes Side Windows		
711-06-0100-20SW	8 to 13; Shade 5	Black/Silver



3M™ Speedglas™ 9100 Series Inside Protection Plates

Resistance: Spark; Spatter
Material: Polycarbonate
Color: Clear
Type: Inside Protection Plate

SKU	Lens Coating/ Shade	Window Size
9100X		
711-06-0200-20	Clear	2.1 x 4.2 in
9100XX		
711-06-0200-30	Clear	2.8 x 4.2 in



3M™ Speedglas™ Welding Beanie 06-0500-54

Color: Black
Material: Cotton
Size: One Size

SKU	Used With	Type
711-06-0500-54	Speedglas™ Welding Helmets	Welding Beanie



3M™ Speedglas™ Welding Helmet Outside Protection Plate 9000

Resistance: Scratch
Window Size: 6 in x 3-3/4 in
Material: Polycarbonate
Color: Gray

SKU	Style	Lens Coating/ Shade
711-04-0270-01	High Density	Clear

3M

3M™ UV Resistant Green Masking Tape

Material: Crepe Paper
Roll Length: 60.149 yd (55 m)
Color: Green
Thickness: 4.8 mil

SKU	Width
405-710367-73720	0.709 in (18 mm)
405-710367-73721	0.945 in (24 mm)
405-710367-73719	0.472 in (12 mm)
405-710367-73722	1.417 in (36 mm)
405-710367-73724	2.835 in (72 mm)
405-710367-73723	1.890 in (48 mm)
405-710367-73775	3.780 in (96 mm)



3M™ DBI-SALA® Hard Hat Tether 1500178

Test & Approvals: ANSI / ISEA 121-2018
Material: Polyurethane
Color: Yellow

SKU	Used With	Suspension
098-1500178	Hard Hat	Hat Clips



Scotch-Brite™ Precision Surface Conditioning TN Quick Change Disc

Abrasive Material: Precision Shaped Ceramic

SKU	Speed	Dia.	Roughness Grade	Color
405-638060-89371	13300 RPM	4-1/2 in	Medium	Red
405-638060-89372	13300 RPM	4-1/2 in	Fine	Green
405-638060-89242	12000 RPM	5 in	Coarse	—
405-638060-89244	12000 RPM	5 in	Medium	—
405-638060-89370	13300 RPM	4-1/2 in	Coarse	Brown
405-638060-89373	13300 RPM	4-1/2 in	Very Fine	Blue
405-638060-89369	13300 RPM	4-1/2 in	Extra Coarse	Dark Gray
405-638060-89243	12000 RPM	5 in	Extra Coarse	Dark Gray
405-638060-89245	12000 RPM	5 in	Fine	Green
405-638060-89246	12000 RPM	5 in	Very Fine	Blue



Scotch-Brite™ Roloc™ Precision Surface Conditioning Disc

Abrasive Material: Precision Shaped Ceramic

SKU	Speed	Dia.	Roughness Grade	Color
405-638060-89292	20000 RPM	3 in	Fine	Green
405-638060-89305	25000 RPM	2 in	Coarse	Brown
405-638060-89308	25000 RPM	2 in	Very Fine	Blue
405-638060-89306	25000 RPM	2 in	Medium	Red
405-638060-89293	20000 RPM	3 in	Very Fine	Blue
405-638060-89291	20000 RPM	3 in	Medium	Red
405-638060-89304	25000 RPM	2 in	Extra Coarse	Dark Gray
405-638060-89289	20000 RPM	3 in	Extra Coarse	Dark Gray
405-638060-89290	20000 RPM	3 in	Coarse	Brown
405-638060-89307	25000 RPM	2 in	Fine	Green

Scotch®

3M™ Glass Cloth Electrical Tape 27

Test & Approvals: UL Recognized Component Listing for 150Â°C (Guide OAN22, File E17385; CSA Accepted Component 130Â°C, File LR93411)

Color: White

Material: Glass Cloth

Thickness: 7 mil

SKU	Length	Width
500-150749	66 ft	3/4 in



Scotch® Super 33+ Vinyl Electrical Tape

Color: Black

Material: Rubber-Based Adhesive; Vinyl (PVC) Backing

Thickness: 7 mil

SKU	Length	Width
405-638060-29035	76 ft	3/4 in



Scotch® Vinyl Color Coding Electrical Tape 35

Test & Approvals: UL Listed, UL 510 Standard "Insulating Tape" (product category OANZ), file E129200; CSA Certification, Standard C22.2 No. 197-M1983 "PVC Insulation Tape", File LR 48769

Material: PVC

Thickness: 7 mil

SKU	Length	Width	Color
500-108108	66 ft	3/4 in	Red
500-108283	66 ft	3/4 in	White
500-108443	66 ft	3/4 in	Yellow
500-108368	66 ft	3/4 in	Blue
500-108511	66 ft	3/4 in	Green

HyFlex®

11-842 Multi-Purpose Gloves

Cuff Style: Knitwrist



SKU	Material	Size Group
012-11842050	Recycled Nylon; Spandex	5
012-11842060	Recycled Nylon; Spandex	6
012-11842070	Recycled Nylon; Spandex	7
012-11842080	Recycled Nylon; Spandex	8
012-11842090	Recycled Nylon; Spandex	9
012-11842100	Recycled Nylon; Spandex	10
012-11842110	Recycled Nylon; Spandex	11
012-11842120	Recycled Nylon; Spandex	12

RINGERS® R840 Light-Duty Palm Coated/TPR Impact Protection Gloves

Lining: Black Nylon/Spandex

Coating: Nitrile

Cuff Style: Knit Wrist

Color: Black; Green-Yellow

Material: 15 ga Knit; TPR



SKU	Size Group
012-840-06	6
012-840-07	7
012-840-08	8
012-840-09	9
012-840-10	10
012-840-11	11



Dual-Cylinder Delivery Carts

Width: 21 in OD

Height: 48 in

Acetylene Cylinder: 10 in

Oxygen Cylinder: 10 in



SKU	Load Cap.	No. of Cylinders	Cylinder Diam	Depth
Flat Free				
021-55FF-3B	—	2	10 in	—
Solid Rubber/Plastic Rim; Secured with Locknuts				
021-55-3B	500 lb	2	9 in	10 in

CRESCENT



1/4 in and 3/8 in Drive 6-Pt SAE/Metric Professional Tool Sets

SKU	Includes	Drive Size	Quantity
181-CTK150	(2) Ratchets; (3) Extensions; (51) Standard Sockets Spark Plug Socket; (12) Combination Wrenches; (24) hex Keys; (2) Pliers Adjustable Wrench; (2) Screwdrivers Magnetic Bit Driver; (38) Bits; Bit Adapter; (12) Nutdriver Bits	1/4 in; 3/8 in	150 pc
181-CTK180	(2) Ratchets; (3) Extensions Adapter; (51) Standard Sockets; (31) Deep Sockets Spark Plug Socket; (12) Combination Wrenches; (24) Hex Keys; (2) Pliers Adjustable Wrench; (4) Screwdrivers Magnetic Bit Driver; (46) Bits; Bit Adapter	1/4 in; 3/8 in	180 pc



12 Point Standard SAE Mechanics Tool Sets

Drive Type: 12 Point

Opening Size: 7/8 to 2 in

Includes: 14 Pc. 3/4 in Drive 12 Point Standard SAE Mechanics Tool Set

Material: Alloy Steel

Finish: Chrome Plated

Measuring System: SAE

Quantity: 14 per set

SKU	Drive Size	No. of Points
192-CTK14SAEN	3/4 in	12



14 Piece SAE Combination Wrench Sets

No. of Points: 12

Opening Type: Open/Box

Material: Chrome Vanadium Alloy Steel

Finish: Full Polish Chrome Plated

Includes: Roll-Up Pouch; 3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in; 15/16 in; 1 in; 1-1/16 in; 1-1/8 in; 1-1/4 in

Measuring System: SAE

SKU	Opening Size
192-CCWS4-05	3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in; 15/16 in; 1 in; 1-1/16 in; 1-1/8 in; 1-1/4 in



15 Piece Metric Combination Wrench Sets

No. of Points: 12

Opening Type: Open/Box


Material: Chrome Vanadium Alloy Steel

Finish: Full Polish Chrome Plated

Includes: Roll-Up Pouch; 7 mm; 8 mm; 9 mm; 10 mm; 11 mm; 12 mm; 13 mm; 14 mm; 15 mm; 16 mm; 17 mm; 18 mm; 19 mm; 20 mm; 21 mm

Measuring System: Metric

SKU	Opening Size
192-CCWS5-05	7 mm; 8 mm; 9 mm; 10 mm; 11 mm; 12 mm; 13 mm; 14 mm; 15 mm; 16 mm; 17 mm; 18 mm; 19 mm; 20 mm; 21 mm

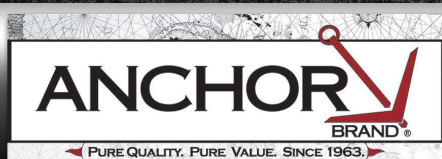

10 Person First Aid Kits

Length: 5.5 in

Width: 8.75 in

Height: 3 in

SKU	Usage	Case Material
101-10-9-FAKP	First Aid	Plastic

Drop Forged C-Clamps

Test & Approvals: Meets or exceeds Federal Standards

Type: C-Clamp

Body Material: Drop Forged Steel

Handle Type: Sliding Pin

Handle Material: Steel

SKU	Opening Size	Overall Length	Throat Depth	Pressure	Spindle Dia
102-404C	3-1/4 in	4 in	3-1/4 in	6,200 lb	3/4 in
102-406C	6-1/16 in	6 in	4-1/8 in	6,900 lb	3/4 in
102-408C	8-1/4 in	8 in	5 in	6,600 lb	3/4 in
102-410C	12-1/4 in	10 in	6 in	8,000 lb	3/4 in
102-412C	12-1/4 in	12 in	6-5/16 in	9,300 lb	7/8 in

Creme Beads Granular Detergents

Capacity Wt.: 100 lb

SKU	Packing Type	Applications
103-AB-CB100	Drum	Walls; Floors; Painted Surfaces; Engine Room



Adjustable Wrenches

Test & Approvals: Meets or Exceeds Federal and ANSI Specifications

Head Angle: 15°

Head Width: Varies

Head Thickness: Tapered

Handle Type: I-Beam

Material: Drop-Forged Alloy Steel

Finish: Chrome Plated

Cowhide Leather Palm Gloves

Style: Gunn Pattern; Wing Thumb

Cuff Style: Rubberized Safety

Cuff Length: 2-1/2 in

Lining: Unlined



Oil-Based Sanded Floor Sweeping Compounds


Color: Red

Odor/Scent: Slight Paraffinic

SKU	Opening Size	Overall Length
103-01-010	1-5/16 in	10 in
103-01-012	1-1/2 in	12 in
103-01-024	2-7/16 in	24 in

SKU	Size Group	Material
101-2100	Large	Canvas Back; Select Shoulder Leather; Split Cowhide

SKU	Capacity
103-FLOOR-SWEEP-DRM300	300 lb
103-FLOOR-SWEEP-GRIT	50 lb

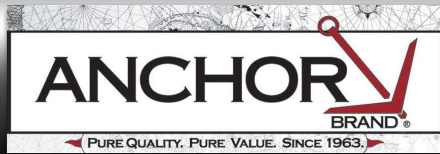

Knot Wheel Brushes

Dia.: 4 in
Arbor Diam: 5/8 in - 11
No. of Knots: 20
Arbor Thread: 5/8 in - 11

SKU	Bristle Material	Bristle Diam	Face Width
102-4K58	Carbon Steel	0.014 in	5/8 in
102-4K58S	Stainless Steel	0.014 in	5/8 in
102-R4K58	Carbon Steel	0.014 in	4 in
102-R4K58S	Stainless Steel	0.02 in	1/2 in



Utility Brushes

Bristle Material: Stainless Steel
Block Material: Wood
Block Width: 1/2 in
Bristle Rows: 3 X 7

SKU	Handle Type	Handle Material
102-15SS	Curved	Wood
102-30SS	Curved	Wood



Standard Soapstone Holders

Includes: Pocket Clip; Soapstone

SKU	Shape	Length	Used With
900-RH-30	Round	5 in	Standard Round Soapstone
900-SH-10	Flat	5 in	Standard Flat Soapstone



Universal Sorbent Pads

Packing Type: Bale

SKU	Length	Width	Absorption	Quantity
103-AB-BPU100	17 in	15 in	20.5 gal	100/BA
103-AB-BPU200	17 in	15 in	34 gal	200/BA



Coco Mats

Height: 1-1/2 in
Material: Densely Woven Fibers
Color: Natural Tan


SKU	Length	Width
103-AB-GDN-5	36 in	22 in



UV Stabilized Cable Ties

Color: Black
Material: Nylon 6/6

SKU	Length	Width	Tensile Strength	Bundle Diam
102-1150UVB	11.1 in	0.18 in	50 lb	3 in
102-12120UVB	12 in	0.298 in	120 lb	3 in
102-1450UVB	14.6 in	0.18 in	50 lb	4 in
102-15120UVB	15 in	0.298 in	120 lb	4 in
102-24175UVB	24.5 in	0.350 in	175 lb	7.2 in

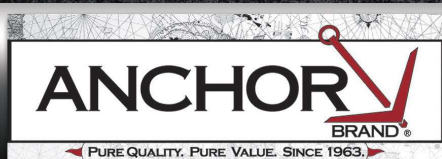

Visors

Test & Approvals: ANSI-Z87.1 2003; OSHA
Lens Material: PETG
Used With: Jackson Safety® Head Gear/Cap Adaptors
Length: 15-1/2 in
Height: 9 in
Thickness: 0.040 in

SKU	Lens Coating/ Shade	Binding	Style	Color
101-3440-B-CL	Clear	Aluminum Bound	Bound Visor	Clear
101-3440-U-CL	Clear	Unbound	Unbound Visor	Clear
101-3442-B-DG	Dark Green	Aluminum Bound	Bound Visor	Dark Green
101-3465-5	Shade 5.0	Aluminum Bound	Bound Visor	Shade 5

White PTFE Thread Sealant Tapes

Test & Approvals: Mil Spec T27730A, FDA 21 CFR 1550
Thickness: 0.0035 in
Color: White

SKU	Length	Width
102-1/2X1296PTFE	1296 in	1/2 in
102-1/2X520PTFE	520 in	1/2 in
102-1X1296PTFE	1296 in	1 in
102-1X520PTFE	520 in	1 in
102-3/4X520PTFE	520 in	3/4 in

Anti-Spatters

Physical Form: Liquid
Color: Clear

SKU	Capacity Vol.	Chemical Compound	Type
905-620-160Z	16 oz	Solvent-Based	Anti-Spatter & Nozzle Shield
905-620-240Z	24 oz	Methylene Chloride	Anti-Spatter



Weld Fillet Gauges

Test & Approvals: Calibration Certificate M18E2885-91
Measuring System: Inch; Millimeter
Accuracy: +/- 5.6 micron
Finish: Matt Polished

SKU	Type	Range
100-NFG-7	Fillet Gauge	1/8 in - 1 in

Flexible Depressed Center Wheels


Test & Approvals: ANSI B7.1, Latest Revision
Thickness: 1/8 in

SKU	Dia.	Arbor Size	Grit	Speed
903-45A27M	4-1/2 in	7/8 in	30	13,300 RPM
903-45A27MT	4-1/2 in	5/8 in-11	46	13,300 RPM
903-7A27M	7 in	5/8 in-11	46	8600 RPM

Chipping Hammers

Handle Material: Steel
Head Material: Forged Steel
Head Length: 7.6 in
Color: Black

SKU	Overall Length	Handle Type
900-000H	12 in	Spring

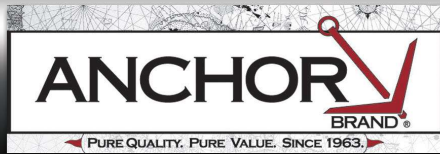

MIG Welding Pliers

Jaw Shape: Double-Edged
Material: Carbon Steel

SKU	Overall Length	Wire Diam
900-YS-50	21 cm	0.8 mm - 1.5 mm



DC Copperclad Gouging Electrodes

Model Type: Pointed

SKU	Amps	Dia.	Length
900-22-043-003X	300 A - 400 A	1/4 in	12 in
900-22-053-003X	350 A - 450 A	5/16 in	12 in
900-22-063-003X	450 A - 600 A	3/8 in	12 in
900-24-064-003X	450 A - 600 A	3/8 in	17 in



Mild Steel Electrodes

Test & Approvals: AWS A5.1
Material: Carbon Steel
Length: 14 in
Type: E7018

SKU
900-7018-18X5
900-7018-18X50
900-7018-332X50
900-7018-532X50



Cover Lens

Test & Approvals: OSHA
Resistance: Scratch; Static
Color: Clear




E3 Tungsten Electrodes

Material: E3

Type: TIG Tungsten Electrode

SKU	Lens Coating/ Shade	Window Size	Material
901-SP-1	Clear	2 in x 4.25 in	70% CR-39 Plastic
901-SP-2	Clear	2 in x 4.25 in	100% CR-39 Plastic
901-SP-35	Clear	4-1/2 in x 5-1/4 in	50% CR-39 Plastic
901-SP-45	Clear	5-1/4 in x 4-1/2 in	CR-39 Plastic

SKU	Dia.	Length
900-1167GE3	1/16 in	7 in
900-187GE3	1/8 in	7 in
900-3327GE3	3/32 in	7 in



E71T-GS Flux Cored Welding Wires


Type: Welding Wire

Packing Type: Carton

Temp. Range: -

Tensile Strength: 70,000 psi

SKU	Material	Dia.	Wt.
900-71TGS030X10	E71T-GS Alloy	0.030 in	10 lb
900-71TGS030X2	E71T-GS Alloy	0.030 in	2 lb
900-71TGS035X10	E71T-GS Alloy	0.035 in	10 lb
900-71TGS035X2	E71T-GS Alloy	0.035 in	2 lb

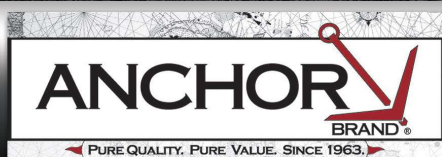

ER70S-6 MIG Welding Wires

Test & Approvals: ASME; SFA; AWS A5.18

Tensile Strength: 550 MPa

Material: Carbon Steel

SKU	Dia.	Wt.
900-70S6035X33-PLT	0.035 in	2,376 lb
900-70S6035X44-PLT	0.035 in	2,640 lb
900-70S6045X44-PLT	0.045 in	2,640 lb

Ground Clamps

Test & Approvals: BS 638.5

SKU	Amps	Cable Cap.	Jaw Opening	Throat Depth
900-GC-300	300 A	2/0	1 in	—
900-LGC-300	300 A	2/0	1.5 in	3 in
900-LGC-500	500 A	4/0	1.5 in	3-1/2 in
900-TGC-300	300 A	3/0	2 in	3.86 in

MIG Contact Tips

Type: Centerfire™ T Series

Used With: Bernard™ BTB; S-Gun™; Clean Air™; Dura-Flux™

SKU	Tip I.D.	Material	Wire Size
900-T-062	1/16 in	Copper	1/16 in
900-T-035	0.035 in	Copper	0.035 in
900-T-052	0.052 in	Copper	0.052 in
900-T-045	0.045 in	Copper	0.045 in



Electrode Holders - High Tong Type

Test & Approvals: Partial IEC 60974-11

Body Material: Brass

SKU	Process	Amps	Electrode Cap.	Cable Cap.	Length
900-A-316	Manual Arc Welding	250 A	4 mm	1/0	9.25 in
900-A-532	Manual Arc Welding	200 A	3.2 mm	#3	8.46 in
900-A-732	Manual Arc Welding	300 A	5 mm	1/0	10.04 in

Lube Pads

Chemical Compound: None


Physical Form: Solid

Applications: Welding

SKU	Type	Color
905-LUBE-PAD-6PK-TREATED	Treated Wire Lube Pad	Silver
905-LUBE-PAD-6PK-PLAIN	Plain Wire Lube Pad	White

MIG Gun Nozzles

SKU	Nozzle Style	Bore Size	Used With
900-23-62	1/8 in Recess, Self-Insulated	5/8 in	Best Welds® 250/400; Tweco® No 2, 3 and 4
900-4592	Heavy-Duty; Insulated	9/16 in	Bernard® Q-Gun™ and S-Gun™

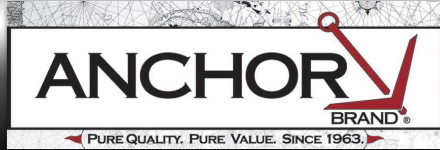

MIG Guns For Tweco® Consumables

Cable Length: 15 ft

SKU	Gas Type	Cooling Method	Welding Amp @ Duty Cycle	Wire Size
900-250153545M	Argon/CO2	Air	250 A @ 80%; 280 A @ 60%	0.035 in - 0.045 in
900-250153035M	Argon/CO2	Air	250 A @ 80%; 280 A @ 60%	0.030 in - 0.035 in
900-400153545M	Argon/CO2	Air	350 A @ 80%; 400 A @ 60%	0.035 in - 0.045 in

Rod Storage Tubes

Resistance: Air; Water

SKU	Capacity Wt.	Material	Color
900-BW14-BLU	10 lb	High Impact Polyethylene	Blue
900-BW14-RED	10 lb	High Impact Polyethylene	Red
900-BW36-BLU	10 lb	High Impact Polyethylene	Blue

Soapstones

Length: 5 in

SKU	Shape	Color
900-FL-5	Flat	White
900-RD-5	Round	White



TIG Torch Packages

Material: Rubber

Cooling Method: Air

Includes: Torch; (1) Handle; 1-Pc Rubber Power Cable; Insulator; Long Back Cap

SKU	Head Type	Cable Length
900-17FV-25-R	Flex with Valve	25 ft



Roll Goods

Test & Approvals: Meets ANSI FM4950 1.4.3. Vertical applications with light-moderate exposures resulting from chipping, grinding, heat treating, sand blasting, and light horizontal welding

Material: Fiberglass

SKU	Length	Width	Color
902-RG-2025-60	50 yd	60 in	Tan
902-RG-2523RA-40	50 yd	40 in	Red

Welding Cables

Test & Approvals: RoHS

Style: Welding Cable

Amps: Consult Ampacity Chart

Temp Range: -50° C (-58° F) - 105° C (221° F)

Jacket Material: EPDM

Number of Conductors: 1

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper

SKU	Cable/Wire Description	Insulation Thickness
911-1-250	1 AWG x 250 ft	0.06 in
911-1/0-250	1/0 AWG x 250 ft	0.08 in
911-1/0-500	1/0 AWG x 500 ft	0.08 in
911-2-500	2 AWG x 500 ft	0.06 in
911-2/0-250	2/0 AWG x 250 ft	0.08 in
911-2/0-500	2/0 AWG x 500 ft	0.08 in
911-4/0-250	4/0 AWG x 250 ft	0.08 in





High Performance White Lithium Greases

Packing Type: Aerosol Can

NLGI Grade: 1

Color: White

Temp. Range: -

Flash Point: 0° F

Specific Gravity: -

Thickener: Lithium

Odor/Scent: Fuel Oil-Like

Applications: Automotive Hinges;

Axles; Bearings; Chains; Conveyor

Belts; Couplings; Fan Motors; Heavy-Duty Chains; Heavy

Machinery; High Load Applications Including Gears; Mechanical

Mechanisms; Non Disc Brake Parts; Open Lube Points;

Plumbing Fixtures; Shafts; Springs



SKU

108-16-LG

Capacity Vol.

11 oz

PB™ Penetrating Catalysts

Packing Type: Aerosol Can



SKU

108-26-PB

Capacity Vol.

18 oz

Physical Form

Aerosol Liquid



Brake Parts Cleaners

Color: Clear

Removes: Brake Fluid; Dust Buildup;
Grease; Oil; Other Contaminants from
Brake Linings and Pads

Chemical Compound: Solvent



SKU

615-M715

Capacity Vol.

14 oz

Fill Amount

14 oz

VOC

10% to 50% /
10 to 500g/L
Greater Than

Specific Gravity

0.78

615-M720

19 oz

19 oz

50% / 500
g/L

1.6



SPC Allwik® Drum Spill Kits

Test & Approvals: Drum

meets UN Specifications

Absorption: 41 gal

Type: Universal

Includes: (60) Pads 15

in x 19 in; (4) SOC's; 3 in

x 12 ft; (8) Pillows; 17 in

x 19 in; Goggles; Nitrile Gloves; (5) Disposal Bags; Emergency

Response Handbook



SKU

655-SKA55

Width

24 in



MRO Plus™ Absorbents

Packing Type: Bale

Absorption: 26 gal



SKU

655-MR0100

Length

19 in

Width

15 in



1540 revolution® Premium Goat Grain Unlined Palm TIG/Multi-Task Welding Gloves

Lining: Fleece; Foam

Style: Cut and Sewn; Double

Palm; Glide Patch; Gunn Cut;

Kontour™ Design; Kontour™

Thumb; Kontour™ Wrist;

Padded/Reinforced Palm; Pull

Strap; Reinforced Wing Thumb

Cuff Style: Gauntlet

Color: Gold; Pearl White



SKU

607-1540-M

Size Group

Medium

Material

Cowhide Back/Cuff;
Fleece/Foam Liner;
Goat Grain Palm
Cowhide Back/Cuff;
Fleece/Foam Liner;
Goat Grain Palm
Cowhide Back/Cuff;
Fleece/Foam Liner;
Goat Grain Palm

607-1540-L

Large

607-1540-XL

X-Large



Knock'er Loose® Penetrating Solvents

Packing Type: Aerosol Can



SKU

125-03020

Capacity Vol.

16 oz; 13 wt oz

Physical Form

Liquid

Wasp and Hornet Killer Plus™ Insecticides

Insect Type: Crawling Bugs; Hornets;
Wasps

Capacity Wt. [Nom]: 14 wt oz



SKU

125-14010

Container Size

20 oz

Packing Type

Aerosol Can

1871 Multi-Task Gloves

Style: Leather Palm/Back;

Palm Patch; Reinforced

Thumb Saddle; Wool

Insulated Back

Cuff Style:

Reverse-Scalloped



SKU

607-1871-M

Size Group

Medium

Material

Boarhide™ Leather;
Kevlar® Thread; Ovis-
Hide™ Premium Sheep
Grain Leather; Wool
Boarhide™ Leather;
Kevlar® Thread; Ovis-
Hide™ Premium Sheep
Grain Leather
Boarhide™ Leather;
Kevlar® Thread; Ovis-
Hide™ Premium Sheep
Grain Leather

607-1871-L

X-Large

607-1871-L

Large



Tongue and Groove Straight Jaw Plier Sets

Handle Type: CHANNELLOCK
BLUE® grip
Material: Forged High Carbon Steel



SKU	Overall Length	Includes
140-GS-3	426° 6.5 in; 420° 9.5 in; 440° 12 in	426° 6.5 in; 420° 9.5 in; 440° 12 in
140-GS-1	(420°) 9.5 in; (426) 6.5 in	(1) 420°; (1) 426



3.5 gal Industrial Concrete Open Head Sprayers

Operating Pressure: 40 to 60 psi
Extension Type: Brass Wand
Hose Length: 48 in
Color: Red
Pump Type: Piston with Chemical-Resistant Seals and Gaskets
Handle Type: Tri-Lock Cap; Ergo
Nozzle Type: Brass Fan-Tip
Body Material: Tri-Poxy® Steel
Mounting: Hand Held
Applicable Materials: Concrete Additives; Form Oil
Includes: Tank; Brass Wand; Reinforced Hose
Wt.: 11 lb



SKU	Extension Length
139-1949	24 in

Lawn and Garden Sprayers

Operating Pressure: 45 psi
Extension Type: Straight Poly Wand
Hose Length: 34 in
Color: Translucent White
Pump Type: Universal PL Nitrile
Handle Type: Poly Shut-Off Assembly
Nozzle Type: Poly Adjustable Cone Nozzle
Body Material: Polyethylene
Mounting: Handheld
Applicable Materials: Liquids
Includes: Sprayer; Wand



SKU	Capacity Vol.	Extension Length	Wt.
139-20000	1 gal	12 in	2.5 lb
139-20002	2 gal	18 in	3.5 lb

ProSeries™ XP Poly Sprayers

Extension Type: Straight Poly
Hose Length: 48 in
Color: Translucent White
Handle Type: Comfort Grip
Nozzle Type: Adjustable Brass
Body Material: Polyethylene
Mounting: Hand Held
Applicable Materials: Plants; Trees; Lawns; Gardens



SKU	Capacity Vol.	Extension Length	Operating Pressure	Pump Type	Wt.
34 in Hose; 20 in Poly Wand					
139-26021XP	2 gal	16 in	45 psi	Poly Viton	5.2 lb
48 in Hose; 20 in Poly Wand					
139-26031XP	3 gal	20 in	40 to 60 psi	Piston	7 lb

SureSpray™ Select Sprayers

Operating Pressure: 45 PSI
Extension Type: Poly Extension Wand
Hose Length: 34 in
Color: Translucent
Pump Type: Nitrile
Handle Type: Ergo
Nozzle Type: Adjustable Brass Cone
Body Material: Polyethylene
Mounting: Hand Held
Applicable Materials: Fertilizers; Fungicides; Herbicides; Pesticides; Cleaners
Includes: Brass extension



SKU	Capacity Vol.	Extension Length
139-27030	3 gal	14 in



HAND MEDIC® Skin Conditioner ADX-7™ Dispensers

Test & Approvals: ADA
Height: 9.79 in
Length: 3.94 in
Width: 3.71 in
For Model: ADX-7™ Dispensers
Capacity Vol.: 700 mL
Color: Black; Chrome
Used With: GOJO® HAND MEDIC® Professional Skin Conditioner Refills



SKU	Type	Material
315-8782-06	Wall Mount Dispenser	ABS Plastic; Polycarbonate View Window



5 Minute® Epoxies

Test & Approvals: Adhesive Tensile Shear ASTM D 1002; Dielectric Strength, volts/mil ASTM D 149; Cured Hardness Shore D ASTM D 2240; Cured Density ASTM D 792
Adhesive Tensile Shear: 1,900 psi @ 0.050 in Bondline
Chemical Compound: Epoxy
Working Time: 3 min to 6 min @ 72° F
Dielectric Strength: 490 V/mil
Color: Colorless to Light Yellow



SKU	Capacity vol.	Packing Type
230-14200	15 oz	Dual Cartridge
230-14210	2.5 oz	Dual Tube
230-14250	25 mL	Dev-Tube™
230-14270	50 mL	Dual Cartridge

Aluminum Putty (F) Kits

Test & Approvals: Chemical resistance was tested by immersion for 30 days at 75 °F, after 7 days room temperature cure; Qualified per MIL-DOD-C-24176B.
Specific Gravity: 1.58 gm/cc
Stress Resistance: -
Hardness: 85 Shore D
Applications: Air Conditioning System Components
Applicable Materials: Aluminum; Most Metals
Full Cure Time @ Temp.: 7 days @ 75° F
Dielectric Strength: 100 V/mil
Resistance: 1 1-Trichloroethane; Ammonia; Cutting Oil; Gasoline (Unleaded); Hydrochloric 10%; Kerosene; Phosphoric 10%; Sodium Chloride Brine; Sulfuric 10%; Trisodium Phosphate
Packing Type: Tub



SKU	Temp. Range	Color
230-10610	Dry 250° F; Wet 120° F	Aluminum

Hand Medic® Professional Skin Conditioners

Odor/Scent: Fragrance Free



SKU	Packing Type	W x L Per Sheet	Capacity Vol.	Quantity
315-8745-04	Refill	x	685 mL	4 per Pack
315-8150-12	Tube	x	5 oz	12 per Case

DEWALT

20V MAX XR Lithium Ion Brushless Drill/Driver Kits

Speed: 500 rpm/1500 rpm/2250 rpm Hammer Mode; 450 rpm/1300 rpm/2000 rpm Drill Mode

Cycle Rate: 38250 blows/min

Batt Type: Lithium-Ion

Length: 7-3/4 in

Handle Type: T-handle

Includes: (2) DCB205 20V MAX* XR High Capacity Lithium-Ion Batteries; Charger; Tool; Case

Chuck Size: 1/2 in

SKU	Batt. Cap.	Includes
115-DCD996B	4.0 Ah	360° Side Handle; Belt Hook; DCD996 - 20V MAX XR® Lithium Ion Brushless 3-Speed Hammerdrill
115-DCD996P2	5.0 Ah	(2) DCB205 20V MAX* XR High Capacity Lithium-Ion Batteries; Charger; Tool; Case



20V MAX* Lithium Ion Grinder Tool Kits

Batt. Cap.: 5 Ah

Batt. Type: Lithium Ion

Length: 14 in

Control Type: Trigger

Handle Type: 2-Position Side Handle

SKU	Speed	Includes
115-DCG412P2	7,000 RPM	DCG412 Grinder; (2) DCB205 20V MAX* XR Premium Li-Ion Battery; Fast Charger; Spanner Wrench; 5 inch Type 27 Grinding Guard; 2-Position Side Handle; Contractor Bag
115-DCG412B	8,000 RPM	Bare Tool Only



20V MAX* Lithium Ion Reciprocating Saw Kits

Batt. Type: Li-Ion

Stroke Length: 1-1/8 in

Cycle Rate: 3000 SPM

Length: 18 in

Control Type: Variable-Speed Trigger

Handle Type: Rubber Comfort Grip

Includes: 20V MAX* Reciprocating Saw; 20V MAX XR Premium Li-Ion Battery (5.0 Ah); Fast Charger; Kit Box

SKU	Voltage	Batt. Cap.
115-DCS380P1	20V	5 Ah



20V MAX* XR® Brushless Cordless Compact Drill/Driver and Impact Driver Combo Kits

Batt. Cap.: 2.0 Ah

Includes: (1) DCD791 20V MAX drill/driver; (1) DCF887 20-volt MAX impact driver; (2) DCB203 20-volt MAX lithium ion 2.0-AH batteries; (2) belt hooks, charger and contractor

SKU	Voltage	Batt. Type
115-DCK283D2	20V	Lithium Ion



20V MAX* XR® Li-Ion Brushless Compact Drills/Drivers

Batt. Cap.: 2.0 Ah

Batt Type: Lithium-Ion

Length: 6.9 in

Handle Type: Pistol Grip

Wt.: 3.4 lb | **Chuck Size:** 1/2 in

Speed: 0 to 550 RPM; 0 to 2000 RPM

SKU	Includes
115-DCD791D2	(1) DCD791B - 20V MAX* XR® Li-Ion BL Compact Drill/Driver; (2) DCB203 - 20V MAX* Compact Lithium Ion Battery Packs; (1) Charger; (1) Kit Box; (1) Belt Hook
115-DCD791B	(1) 20V MAX* XR® Li-Ion Brushless Compact Drill/Driver (DCD791B); (1) Belt Clip



4HP Large Angle Grinders

Watts: 3,000 W

Speed: 6,500 RPM

Control Type: Lock-On; Trigger

Spindle Thread: 5/8 in to 11 in

Includes: 9 in Guard; 2-Position Side Handle

SKU	Wheel Dia	Amps
115-DWE4519	9 in	15 A

FLEXVOLT® 20 V/60 V MAX* Batteries

Batt. Type: Lithium-Ion

Compatible With: 20V MAX*, 60V MAX*, and 120 MAX* tools



SKU	Voltage	Batt. Cap.	Battery Quantity
115-DCB606-2	20 V; 60 V; 120 V	6.0 Ah	2
115-DCB609-2	20 V/60 V	9 Ah	2
115-DCB612	20 V/60 V	12 Ah	1

DEWALT

FLEXVOLT® 60V MAX* Cordless Grinders with Kickback Brake

Batt. Type: Lithium Ion
Speed: 9,000 RPM
Control Type: Trigger
Handle Type: Rat Tail
Spindle Thread: 5/8in-11

SKU	Includes
115-DCG418X1	(1) DCG418; (1) 20V/60V MAX* FLEXVOLT® 9.0 Ah Battery (DCB609); (1) Charger; (1) Side Handle; (1) 4-1/2 in Type 27 Guard; (1) 6 in Type 27 Guard; (1) Wrench; (2) Flanges; (1) Kit Bag
115-DCG418X2	(1) DCG418; (2) 20V/60V MAX* FLEXVOLT® 9.0 Ah Batteries (DCB609); (1) Charger; (1) Side Handle; (1) 4-1/2 in Type 27 Guard; (1) 6 in Type 27 Guard; (1) Wrench; (2) Flanges; (1) Kit Bag



High Performance Angle Grinders with E-Clutch®

Speed: 9,000 RPM
Spindle Thread: 5/8 in - 11
Wheel Dia.: 6 in
Amps: 13 A

SKU	Watts	Control Type	Includes
115-DWE43066	1,700 MWO	Trigger; Lock-On	Grinder; Side Handle; Inner and Outer Flange; 6 in Type 27 Guard; 6 in Type 1 Guard
115-DWE43066N	1,700 W	Trigger	Grinder; Side Handle; Inner and Outer Flange; 6 in Type 27 Guard; 6 in Type 1 Guard; 5 in Type 27 Guard



Medium Angle Grinders

Watts: 1837 W
Speed: 11000 rpm
Control Type: Spindle Lock
Spindle Thread: 5/8 in-11
Includes: Grinding Wheel; Wrench; Backing Flange; Clamp Nut; Keyless Adjustable Guard; 2-Position Side Handle

SKU	Wheel Dia	Amps
115-DW831	5 in	12 A

Spade Handle Drills

Voltage: 120 V
Amps: 7 A; 9 A
Speed: - 550 rpm
Cutting Cap.: 1-1/2 in (wood with auger bit); 1/2 in (steel with twist bit); 3 in (steel with hole saw)
Length: 10.88 in
Cord Length: 8 ft
Control Type: Variable Speed Reversible Switch
Handle Type: 2-Position Spade Handle; 3-Position Side Handle
Includes: Three-position Side Handle and Chuck Key with Holder



SKU	Chuck Size	Chuck Type
115-DW130V	1/2 in	Keyed

IRWIN STRAIT-LINE

Aluminum Chalk Reels

Case Material: Aluminum Alloy
Handle Type: Self-Locking
Handle Material: Steel
End Type: Metal Hook
Packing Type: Carded
Wt.: 4 oz



SKU	Line Length	Capacity Vol.
586-1932871	50 ft	2 oz

IRWIN VISE GRIP



8-pc GrooveLock Pliers Sets

Wt.: 7 lb

SKU	Includes	Finish
586-2078712	8, 10, 12 in GrooveLocks; 10 in Adjustable Wrench; 8 in Long Nose Pliers; 8 in Linesman Pliers; 6 in Diagonal Cutter Pliers; 6 in Slip Joint Pliers; Pouch	Injection molded



Adjustable Wrenches

Test & Approvals: Meets or Exceeds ANSI Specifications
Head Angle: 15°
Handle Type: ProTouch™ Grip
Material: Chrome Vanadium Steel
Finish: Chrome

SKU	Opening Size	Overall Length	Head Thickness
586-2078606	1 in	6 in	1/4 in
586-2078608	1-1/8 in	8 in	5/16 in
586-2078610	1-1/4 in	10 in	1-1/4 in
586-2078612	1-1/2 in	12 in	1-13/32 in

IRWIN VISE GRIP

Locking Welding Clamps

Test & Approvals: Meets Federal Specifications: GGG-W-00649
Throat Depth: 1-5/8 in
Material: High-Grade Heat-Treated Alloy Steel



SKU	Jaw Opening	Overall Length
586-9R	2-3/4 in	9 in

IRWIN VISE GRIP

Long Nose Locking Pliers

Test & Approvals: Meets Federal Specifications: GGG-W-00649
Material: High-Grade Heat-Treated Alloy Steel



SKU	Jaw Opening	Overall Length	Throat Depth
586-4LN-3	1-5/8 in	4 in	1-5/8 in
586-6LN-3	2-1/4 in	6 in	2 in
586-9LN-3	2-7/8 in	9 in	2-2/32 in


IRWIN
VISE GRIP

MIG Welding Pliers

Jaw Shape: Welder's
Material: Metal; Blade Steel



SKU	Overall Length
586-1873303	8 in



The Original™ Locking C-Clamps with Regular Tips


Test & Approvals: ASME B107.36-2002
Type: Locking C-Clamp
Pressure: Adjustable Turn Screw
Body Material: Heat-Treated Alloy Steel
Handle Type: Vise-Grip Release
Handle Material: Heat-Treated Alloy Steel

SKU	Opening Size	Overall Length	Throat Depth
586-11R	4 in	11 in	2-5/8 in
586-18DR	7-1/2 in	18 in	9-1/2 in
586-18R	8 in	18 in	9-1/2 in
586-24R	10 in	24 in	15-1/2 in
586-6R	2-1/8 in	6 in	1-1/2 in
586-9DR	4-1/2 in	9 in	4-3/4 in

IRWIN
TOOLS

Bi-Metal Utility Blades

No. of Cutting Edges: 1
Blade Shape: Trapezoid
Blade Tip Shape: Triangular Point
Type: Utility



SKU	Quantity	Wt.
586-2084100	5 per pack	0.05 lb
586-2084200	20 per pack	0.98 lb
586-2084300	50 per pack	0.01 lb
586-2084400	100/PK with Dispenser	—

Folding Lockback Utility Knives

Blade Length: 2-3/8 in
Blade Style: Folding
Blade Material: Stainless Steel
Handle Material: Aluminum
Color: Blue; Silver
Blade Tip Shape: Utility
Handle Type: Straight
Includes: (3) Irwin Safety Blades
Height: 1 in
Width: 1 in
Wt.: 0.29 lb



SKU	Handle Length	Overall Length
586-2089100	5-3/4 in	5-3/4 in



Hi-Vis Retractable Knife

Blade Length: 2-3/8 in
Blade Style: Bi-Metal
Blade Material: Bi-Metal
Color: Orange
Blade Tip Shape: Utility
Handle Type: Ergonomic
Includes: (3) Irwin Blue Blades
Width: 3/4 in
Type: Retractable
Wt.: 0.37 lb

SKU	Handle Length	Overall Length
586-2082300	6-1/2 in	6-1/2 in



Self-Retracting Safety Knives

Blade Length: 2-3/8 in
Blade Style: Self-Retracting
Blade Material: Bi-Metal
Handle Material: Aluminum
Color: High Visibility Red
Blade Tip Shape: Utility
Handle Type: Contoured
Includes: (1) Irwin Blue Blade™
Width: 1-1/2 in
Type: Safety Knife
Wt.: 0.25 lb

SKU	Handle Length	Overall Length
586-2088600	6 in	6 in

LENOX


All-In-One Screwdrivers

Blade Style: Phillips; Slotted; Nut Driver, Square Drive

SKU	Material	Components
433-23932	Composite	Phillips #1, #2; Slotted 3/16 in, 1/4 in; Square Drive #2, #3; Nut Driver 1/4 in, 5/16 in, 3/8 in



Master-Band® Band Premium Band Saw Blades

Width: 1/2 in
Thickness: 0.023 in
Teeth Per Inch: 18
Cutting Edge Material: Matrix
Style: Tuff Tooth™
Quantity: 3

SKU	Cutting Cap.	Cutting Length
433-8011638EW18	3/32 in - 1/4 in	44-7/8 in



Wolf-Band® Portable Band Saw Blades

Width: 1/2 in
Thickness: 0.020 in
Cutting Edge Material: Bi-Metal
Style: Wolf-Band® Portable Band Saw Blade
Cutting Length: 44-7/8 in

SKU	Cutting Cap.	Teeth Per Inch
433-8010738PW145	3/16 in - 3/8 in	14
433-8010838PW185	3/32 in - 1/4 in	18



Classic Standard Length Pear Head Ratchets

No. of Teeth: 24
Ratcheting Angle: 15°
Head Type: Pear
Material: Alloy Steel
Finish: Full Polish

SKU	Drive Size	Overall Length	Wt.
577-5249	3/8 in	7 in	0.60 lb
577-5449	1/2 in	10 in	1.46 lb



Foot Pound Ratchet Head Torque Wrenches

Test & Approvals: ASME B107.14M
Torque: 50 ft-lb - 250 ft-lb
Torque Increment: 1 ft-lb
Overall Length: 26-1/4 in
Head Type: Pear
Locking Type: Ball
Torque Setting: Micrometer
Material: Alloy Steel
Wt.: 6.11 lb

SKU	Drive Size	Drive Type
577-6014C	1/2 in	Male Square



Hinge Handles

Handle Material: Alloy Steel
Wt.: 2.68 lb

SKU	Drive Size	Overall Length
577-5469	1/2 in	24 in

STANLEY



Compo-Cast® Standard Head Soft Face Hammers

Color: Orange
Head Material: Urethane

SKU	Head Weight	Face Diam	Head Length	Wt.
680-57-530	10 oz	1.20 in	3-1/8 in	0.73 lb
680-57-531	18 oz	1.60 in	3-3/4 in	1 1/4 lb
680-57-532	21 oz	1.80 in	4-1/16 in	1.53 lb
680-57-533	42 oz	2 in	4-5/8 in	2.62 lb
680-57-534	52 oz	2-1/2 in	5-3/8 in	3 1/2 lb



Powerlock® Tape Rules 1/2 in Wide Blade

No. of Scales: 2
Blade Material: Steel
End Type: Hook
Return Motion: Spring
Type: Single Side Tape
Blade Length: 12 ft
Blade Width: 1/2 in

SKU	Graduations	Blade Finish	Color	Case Material
680-33-212	1/16 in; 1/32 in; 12 in	Yellow Enamel	Silver; Yellow	Metal
680-33-215	1/16 in; 10 mm	Mylar® Polyester Film	Chrome	Metal
680-33-272	1/16; 1/10	Mylar® Polyester Film	Silver; Yellow	Zinc



Powerlock® Tape Rules Wide Blade

No. of Scales: 1
Blade Material: Steel
End Type: Hook
Return Motion: Spring
Type: Single Side Tape
Color: Metallic

SKU	Blade Length	Blade Width	Graduations	Blade Finish	Case Material
680-33-116	16 ft	3/4 in	1/32 in	Polyester Yellow Enamel	ABS Plastic
680-33-158	5m/16 ft	3/4 in	1/8 in; 10 mm	Yellow Enamel	ABS
680-33-312	12 ft	3/4 in	1/32 in	Polyester Mylar®	ABS
680-33-425	25 ft	1 in	1/16 in	Polyester Mylar®	ABS Plastic
680-33-430	30 ft	1 in	1/16 in	Polyester Film Mylar®	ABS
680-33-835	35 ft	1 in	1/16 in	Polyester Film	ABS

DUPONT™**Tychem® 2000 Coveralls****Color:** Yellow**Resistance:** Abrasion; Chemicals; Flex Cracking; Puncture**Style:** Serged Seams; Attached Hood; Elastic Wrists and Ankles; Zipper Front; Storm Flap**Applications:** Chemical Processing; Food Processing; Petroleum Refining; Pharmaceutical Manufacturing; Pulp and Paper Manufacturing

SKU	Size Group	Material
251-QC127S-XL	X-Large	Tychem® 2000
251-QC127S-2XL	2X-Large	Tychem® 2000
251-QC127S-3XL	3X-Large	Tychem® 2000

Tyvek® 400 Coveralls**Color:** White**Resistance:** Hazardous Aerosols/Dry Particles; Non-Hazardous Light Liquid Splash**Applications:** Agriculture; Asbestos Abatement; Environmental Cleanup; Food Processing; General Maintenance/Operations; Mold Remediation; Spray Painting; Wind Turbine Manufacturing

SKU	Size Group
Serged Seams; Collar; Elastic Waist; Elastic Wrists and Ankles; Zipper Front; Storm Flap	
251-TY125SWHMD002500	Medium
251-TY125S-L	Large
251-TY125SWHL002500	X-Large
251-TY125S-2XL	2X-Large
251-TY125SWH3X002500	3X-Large
251-TY125SWH4X002500	4X-Large
Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap	
251-TY120S-M	Medium
251-TY120S-L	Large
251-TY120S-XL	X-Large
251-TY120S-2XL	2X-Large
251-TY120S-3XL	3X-Large
251-TY120S-4XL	4X-Large
251-TY120S-5XL	5X-Large
Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap	
251-TY127S-M	Medium
251-TY127S-L	Large
251-TY127S-XL	X-Large
251-TY127S-2XL	2X-Large
251-TY127S-3XL	3X-Large
251-TY127S-4XL	4X-Large

Tyvek® 400 Shoe & Boot Covers**Color:** Gray**Type:** Shoe Cover w/ Serged Seams**Fastening Method:** Low Elastic Top Opening

SKU	Size Group
251-FC450S	One Size Fits Most

Tyvek® 400 Sleeves**Width:** - 10 in**Material:** DuPont™ Tyvek® Sleeve**Closure Type:** Serged**Color:** White**Resistance:** Aerosol; Particulates; Light Liquid Splash; Serged

SKU	Size Group	Length
251-TY500S	Standard	18 in

FIRST AID ONLY™**10 Person ANSI First Aid Kits****Test & Approvals:** Contents Exceed Requirements of ANSI Standard Z308.1-2003**Length:** 5 in**Width:** 3 in**Height:** 8 in

SKU	Case Material
579-6060	Weatherproof Plastic

**25 Person Industrial First Aid Kits****Test & Approvals:** Contents Exceed Requirements of ANSI Standard Z308.1-2003**Length:** 7 in**Height:** 10 in

SKU	Case Material	Width
579-6084	Weatherproof Plastic	3 in
579-6086	Steel (Non-Gasketed)	3in
579-6100	Weatherproof Steel	3 in

IR Ingersoll Rand**300 Series Straight Die Grinders****Pressure:** 90 psi**Hose Size:** 3/8 in**Collet Size:** 1/4 in; 6 mm

SKU	Power Cap.	Noise Level	Free Speed	Length	Housing Material
383-307B	1/4 hp	83 dB	28,000	5.19 in	Aluminum
383-308B	0.33 hp	92 dB	25,000	6.85 in	Composite

**5100 Series Random Orbital Air Sanders****Power Cap.:** 0.3 hp**Air Consumption:** 17.5**Free Speed:** 12000 RPM**Inlet Size:** 1/4 in NPT**Hose Size:** 5/16 in**Handle Type:** Comfort Grip**Noise Level:** 77.9 dB

SKU	Spindle Thread	Disc/Pad Diam
383-5151-5	5/16 in-24	5 in

**Bloodborne Pathogens Kits****Length:** 7-1/2 in**Width:** 4-1/2 in**Height:** 2-3/4 in

SKU	Usage	Case Material
579-3060	Spill Clean Up Kit	Weatherproof Plastic

GASOILA
CHEMICALS**Free All® Deep Penetrating Oils**

Packing Type: Aerosol Can
Temp. Range: 20°F; -7°C - 120°F; 49°C
Flash Point: 66°F
Color: Clear



SKU	Capacity Vol.	Container Size
296-RE12	11 oz	11 oz

Soft-Set Thread Sealants

Test & Approvals: UL NSF CSA
Temp. Range: -100° F - 600° F
Color: Blue/Green
Applications: Pipes; Joints; Fittings; Hoses
Resistance: Gasoline; Petroleum; Solvents; Kerosene; Propane ;Butane
Full Cure Time @ Temp.: 24 hrs @ 50° F
Specific Gravity: 1.44
VOC: 205 g/L
Wt.: 1.8 lb



SKU	Capacity	Packing Type
296-SS16	1 pt	Brush Top Can

Tub-O Towels® Multi Purpose Towels

Odor/Scent: Orange
Capacity Vol.: 45 oz
Capacity Wt.: 2.38 lb
Quantity: 90 per dispenser



SKU	Packing Type	W x L Per Sheet
296-TW90	Canister	10 in x 12 in

**G Series 02 Perform® Thirst Quencher Instant Powders**

Package Yield: 2.5 gal
Capacity Vol.: 21 oz



SKU	Flavor	Packing Type
308-03944	Fruit Punch; Lemon-Lime; Orange; Frost Riptide Rush	Pack
308-03969	Lemon-Lime	Pouch
308-03970	Orange	Pouch
308-33673	Frost Riptide Rush	Pouch
308-33677	Glacier Freeze	Pouch
308-33691	Fruit Punch	Pouch

DYKEM**Cross-Check™ Torque Seal® Tamper-Proof Indicator Paste**

Temp. Range: -20° F - 400° F
Applications: Identifying Loose Nuts, Bolts, Fasteners and Assemblies
Resistance: Tamper Proof
Full Cure Time @ Temp.: 1 to 2 h
VOC: 42.28 %
Wt.: 0.2 lb

SKU	Capacity	Packing Type	Color
253-83319	0.05 lb	Tube	White
253-83314	0.05 lb	Tube	Orange
253-83315	0.05 lb	Tube	Green
253-83316	0.05 lb	Tube	Red
253-83317	0.05 lb	Tube	Yellow
253-83318	0.05 lb	Tube	Blue

**High Temp Markers**

Tip Size: Medium; Fiber #38
Tip Type: Threaded Cap
Temp Range: - 2,000° F

SKU	Color	Physical Form
253-44250	Black	Liquid

SCRUBS®**Hand Cleaner Towels**

Packing Type: Wipe Container
Odor/Scent: Citrus
W x L Per Sheet: 10 in x 12 in



SKU
253-42230
253-42272

**Utility Carts**

Load Cap.: 550 lb
Color: Gray

SKU	Height	Width	Depth
825-140018	33-1/2 in	17 in	39-3/4 in
825-141016	28-3/4 in	25 in	43 in
825-141013	32-1/2 in	17 in	34 in
825-141012	34-1/4 in	17 in	41 in
825-141014	33-1/2 in	26 in	41 in
825-140019	33-1/2 in	25-1/2 in	46 in

**Ratchet Tie-Down Straps**

Length: 27 ft
Load Cap.: 3,333 lb
Color: Yellow
Resistance: Abrasion
End Type: Flat Hooks; Open Molded Handle; Steel Ratchet

SKU	Width
130-04623	2 in

Honeywell
FIBRE METALAUTHORIZED
DISTRIBUTOR**Roughneck P2
Hard Caps****Test & Approvals:**
ANSI-Z89.1**Adjusting Method:**
Ratchet; Quick-Lok**Material:** Injection-Molded Fiberglass**Applications:** Construction; Steel Manufacturing; Foundries,
Fabrication, Chemicals; Heavy Industrial Applications**Type:** Type 1, Class G; Quick-Lok Attachments for Helmets and
Faceshields**Size Group:** 6-3/4 to 8

SKU	Color	Suspension
280-P2AQRW09A000	Gray	8 Point

Honeywell
MILLERAUTHORIZED
DISTRIBUTOR**H100 Series Harness****Test & Approvals:** ANSI Z359.11-2014;
OSHA 1910.140; OSHA 1926.502**Connection Type:** Back D-Ring**Style:** Vest**Material:** Elastic Keepers; Gold
Galvanize Finished Alloy Steel D-Rings
and Buckles; PVC Label; Evoprene and
Nylon Label Pack

SKU	Size Group	Load Cap.	Fastening Method
493-H13110021	Small/ Medium	420 lb	Mating Chest Buckles; Tongue Leg Buckles
493-H11110021	Small/ Medium	420 lb	Mating Chest/Leg Buckles

**H700 Full Body
Harness****Fastening Method:** QC Chest/Leg
Buckles**Style:** Industry Comfort (IC)**Material:** Anodized Aluminum Chest/
Leg/Shoulder Strap Buckles and
D-Rings; Brass Plated Belt Buckle;
Polyester/Polyurethane Padding

SKU	Size Group	Load Cap.	Connection Type
493-H7IC3A2	Univ	420 lb	Back/Front/Side D-Rings
493-H7IC1A2	Univ	420 lb	Back D-Ring

Honeywell
NORTHAUTHORIZED
DISTRIBUTOR**7700
Series Half Mask Respirator****Test & Approvals:** NIOSH Certified for use with North N Series
filters and cartridges, Compact Air PAPR and CF2000 Supplied
Air Respirator**Body Material:** Silicone**Resistance:** Particulates; Chemical; Contamination; Gas**Includes:** Facepiece

SKU	Protected Area	Size Group
068-770030M	Half Facepiece	Medium

Honeywell
UVEXAUTHORIZED
DISTRIBUTOR**Avatar™ OTG Eyewear****Test & Approvals:** ANSI Z87.1-2015; CSA Z94.3-2015**Lens Material:** Polycarbonate**Lens Coating/Shade:** Hard Coat**Resistance:** 99.9% UVA/UVB; Scratch

SKU	Frame Color	Temple Color	Lens Tint
763-S3850	Black	Black	Clear
763-S3851	Red/Black	Red/Black	Clear
763-S3852	Red/Black	Red/Black	Gray

**Clear® Plus
Lens Cleaning
Towelettes**

SKU	Length	Width
763-S470	5 in	6 in

**Fog Eliminator
Plus**

SKU	Length	Width
763-S479	2.25 in	5.25 in

**Hypershock™ Safety Eyewear****Test & Approvals:** ANSI Z87.1-2010**Lens Material:** Polycarbonate

SKU	Frame Color	Temple Color	Lens Tint	Lens Coating/ Shade
763-S2975	Clear Ice	Clear Ice	Blue Mirror	Hardcoat
763-S2941HS	Matte Black	Matte Black	Gray	HydroShield™ AF

**Stealth® Goggles****Lens Coating/Shade:** HydroShield™ Anti-Fog**Lens Material:** Polycarbonate**Frame Material:** Elastomer**Ventilation:** Indirect Vent**Strap Material:** Neoprene, Rubber

SKU	Frame Color	Lens Tint
763-S3960HS	Gray	Clear

Honeywell
HOWARD
LEIGHT

AUTHORIZED
DISTRIBUTOR

TrustFit™ Pod Earplugs

Color: Orange
Type: Uncorded



SKU	Noise Reduction	Body Material
154-TRUSTFITPOD-1	28 dB	Foam

VeriShield™ 100 Series Passive Earmuff

Color: Black
Mounting: Over-the-Head



SKU	Noise Reduction Rate (NRR)
154-1035100-VS	24 dB



Hand Scrub

Capacity Vol.: 14 oz



SKU	Packing Type
407-405	Plastic Squeeze Tube

JACKSON
SAFETY

MAXVIEW™ Series Premium Face Shields with Headgear

Style: Partial Crown with Chinguard
Color: Clear
Length: 13-1/4 in
Height: 9 in
Thickness: 0.04 in



SKU	Lens Coating/ Shade	Lens Material	Used With
138-14200	Uncoated; Clear	Polycarbonate	Safety Glasses; Hard Hats
138-14201	Anti-Fog	Polycarbonate	Faceshield Assembly

MAXVIEW™ Series Replacement Window

Used With: Faceshield Visor
Style: Replacement Visor
Color: Clear
Length: 13-1/4 in
Height: 9 in
Thickness: 0.04 in
Model: MAXVIEW™



SKU	Lens Coating/Shade	Lens Material
138-14214	Uncoated	Polycarbonate
138-14215	Anti-Fog	Polycarbonate



SG Series Safety Glasses

Lens Material: Polycarbonate
Lens Coating/Shade: Hardcoat Anti-Scratch
Resistance: Scratch

SKU	Frame Color	Temple Color	Lens Tint
138-50000	Black	Black	Clear
138-50006	Black	Black	Smoke Mirror
138-50004	Black	Black	Indoor/Outdoor

KLEIN
TOOLS



Cordless Utility LED Light

Lumens: Spot 900; Flood 1600; Spot/Flood 2500
Cord Length: Cordless
Guard Material: Pa6-g30; TPE
Type: Bucket Light
Includes: Light; (2) 4Ah Batteries; Charger



SKU	Bulb Type	Voltage
409-BAT20UBL1	LED	20 V



Ironworker's Diagonal-Cutting Pliers

Jaw Shape: Diagonal
Material: Steel

SKU	Overall Length
409-D248-9ST	9.13 in



Ironworker's Side-Cutting Square Nose Pliers

Jaw Shape: Square Nose
Material: Forged Tool Steel

SKU	Overall Length
409-D2000-7CST	9.19 in
409-D2000-9ST	9.35 in
409-D213-9ST	9.35 in



KleenGuard™ A35 Economy Liquid & Particle Protection Coveralls

Color: White

Resistance: Liquid; Particles

Style: Attached Hood; Elastic
Wrists and Ankles; Zipper Front

Applications: Industrial/General
Manufacturing; Liquid Handling;
Maintenance; Pressure Washing

Material: Microporous Film
Laminate



SKU	Size Group
412-38938	Large
412-38939	X-Large
412-38941	2X-Large
412-38942	3X-Large

KIMTECH™

Purple Nitrile™ Disposable Exam Gloves

Test & Approvals: ASTM D6978-05
(Non-Sterile Only)

Thickness: 6 mil



SKU	Lining	Cuff Style	Size Group
412-55080	Unlined	Beaded	X-Small
412-55081	Unlined	Beaded	Small
412-55082	Unlined	Beaded	Medium
412-55083	Unlined	Beaded	Large
412-55084	Unlined	Beaded	X-Large



KLEENGUARD™

G10 Kraken Grip™ Nitrile Gloves

Size Group: X-Large

Thickness: 6 mil Fingers/Palm



SKU	Cuff Style
412-49278	Beaded

KGA10 Lightweight Coveralls

Color: White

Resistance: Non-Hazardous Particulates

Style: Zip Front; Elastic Wrists; Open
Ankle



SKU	Size Group	Material
412-67303	Large	Spunbond Fabric
412-67304	X-Large	Spunbond Fabric
412-67305	2X-Large	Spunbond Fabric

KGA20 Lightweight Coveralls

Color: White

Resistance: Non-Hazardous
Particulates

Style: Zip Front; Elastic Wrists;
Open Ankle



SKU	Size Group	Material
412-68966	Large	SMS Fabric
412-68967	X-Large	SMS Fabric
412-68968	2X-Large	SMS Fabric



Nemesis™ Safety Glasses with Foam Gasket

Lens Material: Polycarbonate

Lens Coating/Shade: Anti-Fog

Resistance: Fog; UVA; UVB; UVC

SKU	Frame Color	Temple Color	Lens Tint
412-65335	Black	Black	Clear
412-65336	Black	Black	Smoke



V30 Nemesis™ VL Safety Glasses

Test & Approvals: ANSI/ISEA Z87.1+

Lens Material: Polycarbonate

Frame Color: Gunmetal

Temple Color: Gunmetal with Black Tips

SKU	Lens Tint	Lens Coating/Shade	Resistance
412-20470	Clear	Uncoated	99.9% UVA/ UVB/UVC
412-20471	Blue Mirror	Anti-Fog	99.9% UVA/ UVB/UVC; Fog
412-20473	IRUV Shade 5.0	Uncoated; IRUV Shade 5	99.9% UVA/ UVB/UVC
412-25704	Smoke	Uncoated	99.9% UVA/ UVB/UVC



V60 Nemesis™ Rx Readers Prescription Safety Glasses

Test & Approvals: ANSI Z87.1+

Lens Tint: Clear

Lens Material: Polycarbonate

Frame Color: Black

Temple Color: Black

Lens Coating/Shade: Hard Coated

Resistance: 99.9% UVA/UVB/UVC; Scratch

SKU	Diopter Strength
412-28618	+1.0
412-28621	+1.5
412-28624	+2.0
412-28627	+2.5
412-28630	+3.0



Equalizer Safety Glasses

Test & Approvals: ANSI Z87.1+

Lens Material: Polycarbonate

SKU	Lens Tint	Lens Coating/ Shade	Resistance
Frame Color: Gunmetal Temple Color: Gunmetal			
412-21294	Clear	Uncoated	99.9% UVA/UVB/UV
412-21296	Clear	Anti-Fog	99.9% UVA/UVB/UV; Fog
412-21297	Smoke	Anti-Fog	99.9% UVA/UVB/UV; Fog
412-21298	Indoor/Outdoor	Uncoated	99.9% UVA/UVB/UV
Frame Color: Blue Temple Color: Blue			
412-21301	Blue Mirror	Mirror	99.9% UVA/UVB/UV



20 in Portable Tool Box

Depth: 8-5/8 in

Height: 9-3/4 in

No. of Compartments: 1

No. of Trays: 1

Material: Steel

Color: Brown Wrinkle

Finish: Textured

Carrying Method: Handle

Includes: Tray

Wt.: 13 lb



SKU	Capacity Vol.	Width
444-K20B	1,636 in ³	20-1/8 in



24 in Professional Tool Box

Depth: 8-5/8 in

Height: 9-3/4 in

No. of Compartments: 1

No. of Trays: 1

Material: Steel

Color: Brown

Finish: Textured

Carrying Method: Handle

Includes: Tray

Wt.: 13 lb

SKU	Capacity Vol.	Width
444-K24B	1963 cu in	24-1/8 in



USA Division

Professional Series Power Tape

Blade Material: Steel

Blade Finish: Nylon

Case: ABS Plastic

Return Motion: Spring

End Type: Hook

Color: Yellow



SKU	Blade Length	Blade Width	Graduations	No. of Scales
416-4912	12 ft	5/8 in	1/16 in	1
416-4916	16 ft	3/4 in	1/16 in	1
416-4925	25 ft	1 in	1/16 in	1
416-4930IM	30 ft	1 in	1/16 in	1
416-4933	33 ft	1 in	Feet; Inches; 1/16ths	3



EC799 Series Electronic Caliper

Measuring Type: Digital

SKU	Outside Jaw Depth	Range
681-00145	2 in	8 in
681-00148	2-1/2 in	12 in
681-00142	1-1/2 in	6 in



Quik Stik®+ Oily Surface Mini Solid Paint Markers

Test & Approvals: OSHA

Temp Range: -50° F - 150° F

SKU	Color
434-28770	White
434-28771	Yellow



The Safety Company

Freedom Series™ V-Gard® Helmet

Test & Approvals: ANSI/ISES

Z89.1-2009; CSA Z94.1-205

Material: Polyethylene

Applications: General Purpose

Size Group: Standard 6-1/2 - 8



SKU	Color	Suspension	Adjusting Method
454-10104254	Camouflage	Fas-Trac® Ratchet	Ratchet
454-10071157	Red/White/Blue	Fas-Trac® III	Fas-Trac® Ratchet

Skullgard® Protective Cap and Hat

Test & Approvals: Meets

or Exceeds the Applicable

Requirements for a Type 1

Helmet (top impact) outlined in ANSI Z89.1 2003, Class E and G

Adjusting Method: Ratchet

Material: Phenolic

Type: Non-Slotted

Size Group: Standard; 6-1/2 to 8



SKU	Color	Type	Suspension
454-475395	Natural Tan	Cap	Fas-Trac Ratchet
454-475407	Natural Tan	Hat	Fas-Trac® Ratchet



Quik Stik®+ Oily Surface Solid Paint Markers

Length: 6 in

Temp. Range: -50° F - 150° F

Flash Point: 66.2° F

Applicable Materials: Ceramic; Concrete and Stone; Glass; Plastic; Rubber and Tires; Steel and Iron

Resistance: UV; Weather

SKU	Color
434-28880	White
434-28881	Yellow



Cut Pro® HyperMax® 13-Gauge Cut Resistant Gloves

Material: HPPE
Cuff Style: Knit Wrist



SKU	Size Group
127-92901KDS	Small
127-92901KDM	Medium
127-92901KDL	Large
127-92901KDXL	X-Large
127-92901KDXXL	XX-Large



Industrial Rhino™ Vinyl Label Cartridge

Material: Vinyl
Color: Black Print on White
Length: 18 ft
Resistance: Chemicals; Moisture; UV
Light



SKU	Width	Used With
784-18443	3/8 in	Rhino™ 1000; Rhino™ 3000; Rhino™ 4200; Rhino™ 5000; Rhino™ 5200; Rhino™ 6000; Rhino™ 6500
784-18444	1/2 in	Rhino™ 1000; Rhino™ 3000; Rhino™ 4200; Rhino™ 5000; Rhino™ 5200; Rhino™ 6000; Rhino™ 6500
784-18445	3/4 in	Rhino™ 4200; Rhino™ 5000; Rhino™ 5200; Rhino™ 6000; Rhino™ 6500

Rhino™ 5200 Advanced Labeling Tool

Test & Approvals: ANSI; TIA/
EIA-606-A



SKU	Includes
784-1755749	IND Vinyl Label Cartridge, Black on White, 3/4 in W x 18 ft L; Quick Start Guide; Rhino™ Industrial 5200 Label Maker; User Manual CD-ROM
784-1756589	IND Vinyl Label Cartridge, Black on White, 3/4 in W x 18 ft L; Hard Case; Quick Start Guide; Li-Ion Rechargeable Battery Pack and AC Adapter; Rhino™ Industrial 5200 Label Maker; User Manual CD-ROM



BRUTE® Round Containers without Lid

Height: 33 in
Dia.: 26-1/2 in
Material: Heavy-Duty Plastic


SKU	Capacity Vol.	Color
640-FG265500GRAY	55 gal	Gray



POLIFAN® Z SGP Curve Steelex Flap Discs

Arbor Diameter: 7/8 in
Speed: 13300 RPM
Abrasive Material: Zirconia

SKU	Dia.	Grit
419-67339	4-1/2 in	40



Aluminum Anti- Seize Lubricant

Temp. Range: -60° F - 1,600° F
Color: Silver
Chemical Compound: Aluminum Powder Calcium Oxide; Graphite; Paraffin Oils (Petroleum)
Resistance: Corrosion; Galling; Seizing
Applicable Materials: Aluminum; Brass; Iron; Stainless Steel
Applications: Anchor Pins on Brake Assemblies; Chain; Cylinder and Exhaust Head Bolts; Gears; Hinges; Rollers; Spark Plugs; Sprocket; U-Bolts and Spring Bolts
Physical Form: Paste Liquid
Odor/Scent: Petroleum
Specific Gravity: 1.13
Flash Point: >399° F
VOC: 0%

SKU	Capacity Wt.	Packing Type
230-80071	4 oz	Bottle
230-80078	8 oz	Brush-Top Bottle
230-80208	16 oz	Brush-Top Bottle

Ultra Silicone RTV Gasket Maker

Full Cure Time @ Temp.: 24 h



SKU	Capacity	Packing Type	Temp. Range
230-24105	13 oz	Cartridge	-65° F - 500° F
230-81724	3.35 oz	Tube	-65° F - 500° F
230-81725	13 oz	Cartridge	-65° F - 500° F
230-81878	3 oz	Tube	-65° F - 700° F
230-82180	3.35 oz	Tube	-65° F - 500° F
230-82194	3.5 oz	Tube	-65° F - 500° F
230-82195	13 oz	Cartridge	-65° F - 500° F
230-85080	9.5 oz	PowerBead™ Can	-65° F - 500° F



Dawn® Professional Heavy Duty Manual Pot & Pan Dish Detergent

SKU	Capacity Vol.
608-08836	38 oz
608-08838	2 gal
608-08837	4 gal



MaxiFlex® Ultimate™ Nitrile Coated Micro-Foam Grip Gloves

Coating: Nitrile
Style: Palm and Finger Coated; Seamless Knit
Cuff Style: Knit-Wrist
Color: Black; Gray
Material: Nitrile; Nylon with Lycra®

SKU	Size Group
112-34-874/S	Small
112-34-874/M	Medium
112-34-874/L	Large
112-34-874/XL	X-Large
112-34-874/XXL	2X-Large



Red Devil

Polyurethane Triple Expanding Foam

Test & Approvals: UL
Temp. Range: 55° F - 90° F
Color: Champagne
Applications: Window and Door Frames; Pipes; Electrical Outlets; Vents; Foundations
Resistance: Waterproof
Full Cure Time @ Temp.: 24 h @ 77 °F
Specific Gravity: 1.1
VOC: < 20%
Wt.: 1 lb



SKU	Capacity	Packing Type
630-0909	12 oz	Aerosol Can

RD PRO® Heat Resistant RTV Sealant

Test & Approvals: TT-S; ASTM; FDA; MIL
Temp. Range: -60° F - 500° F
Color: Red
Applications: Oven Belts; Heating Elements in Appliances; Flanged Pipe Joints; Fired Heaters; Access Doors; Drying Vents
Resistance: Chemicals; Heat; Water; Weather
Full Cure Time @ Temp.: 24 h @ 77 °F
Specific Gravity: 1.02
VOC: < 3%
Wt.: 0.87 lb



SKU	Capacity	Packing Type
630-0809/OI	10.3 oz	Cartridge

RD PRO® Industrial Grade RTV Sealant

Test & Approvals: TT-S; ASTM; FDA; MIL
Temp. Range: -60° F - 400° F
Color: Clear
Applications: Window and Door Frames; Baseboards; Siding; Countertops/Sinks; Shower/Tubs/Gutters; Plumbing Fixtures; Loose Tiles
Resistance: Weather; Water; Chemicals; Mildew
Full Cure Time @ Temp.: 24 h @ 77 °F
Specific Gravity: 1.02
VOC: < 3%
Wt.: 0.92 lb



SKU	Capacity	Packing Type
630-0826/OI	10.3 oz	Cartridge

NORTON

SAINT-GOBAIN®



Bluefire® Type 27 Depressed Center Wheel

Test & Approvals: ANSI
Tool Shape: Type 27
Arbor Size: 5/8 in
Grit: 24

SKU	Dia.	Thickness	Speed
547-66252843213	4-1/2 in	1/4 in	13580 RPM
547-66252843233	7 in	1/8 in	8600 RPM



Gemini K225 AO Coated Cloth Roll

Abrasive Material: Aluminum Oxide (AO)
Body Material: J-Weight Cotton Cloth
Abrasive Trade Name: Gemini K225

SKU	Width	Grit
547-66261126291	2 in	320
547-66261126297	2 in	120
547-66261126299	2 in	80



Max Power Cleaner and Degreaser

Applicable Material: Chrome; Concrete; Countertops; Fiberglass; Formica; Glazed Ceramic; Painted Metal; Porcelain Enamel; Stainless Steel; Sealed Granite

Removes: Grease; Ink; Cryon; Marker; Heel Marks; Adhesive Stickers

Chemical Compound: Benzyl Alcohol; Sodium C14-17 Alkyl Sec Sulfonate; Diisopropanolamine; Ethyleneglycol Monohexylether;

Odor/Scent: Pleasant



SKU	Capacity Vol.
889-323563	32 oz



Industrial Cleaner and Degreaser

Dielectric Strength: 65-70 mV/m

Color: Green

Applicable Material: Carpet; Ceramics; Cement/Concrete; Enamel; Fabric; Fiberglass; Laminates; Metal; Plastic; Upholstery

Removes: Grease; Oil; Dirt; Soil

Chemical Compound: Ethoxylated Alcohol; Sodium Citrate; Sodium Carbonate; Citric Acid

Odor/Scent: Sassafras

VOC: 0.25%

Specific Gravity: 1.03



SKU	Capacity Vol.
676-2710001213012	24 oz



Enduro® Pro HAZ-LO® Headlamp

Batt. Type: Alkaline

Beam Concentration (MBCP): Spot 73m; Flood 20m

Lumens: Spot 160 Lumens; Flood 160 Lumens; Spot/Flood 235 Lumens

Modes: Spot; Flood; Spot/Flood Combo

Color: Yellow; Black

Run Time: 5 h

Lamp Life: 50,000 h

Includes: (3) AAA Alkaline Batteries; Elastic Headstrap; Rubber Hard Hat Strap; 3M® Dual Lock for Strapless Mounting to Hard Hats



SKU	No. of Batteries	Batt. Size
683-61424	3	AAA



ProTac® 2AA Flashlight

Test & Approvals: ANSI/NEMA FL1

Batt. Type: Alkaline

Beam Concentration (MBCP): 4250 cd - High; 400 cd - Low

Lumens: High - 250; Low - 18

Modes: High; Low; Strobe

Color: Black

Run Time: High - 2 hr; Low - 43 hr; Strobe - 4 hr

Lamp Life: 50,000 hr

Includes: (2) Batteries; Nylon Holster

SKU	No. of Batteries	Batt. Size
683-88033	2	AA



Stinger® LED Rechargeable Flashlight

Test & Approvals: ANSI/NEMA FL1

Batt. Type: NiCd Rechargeable

Beam Concentration (MBCP): 24,000/12,000/6000 cd

Lumens: High - 425; Medium - 200; Low - 100

Modes: High; Medium; Low; Strobe


Color: Black

Run Time: High - 3 hr; Medium - 5.5 hr; Low - 10 hr; Strobe - 7.5 hr

Lamp Life: 50,000 hr

Includes: AC/DC Steady Charger; (2) Holders

SKU	No. of Batteries	Batt. Size
683-75713	1	3.6V

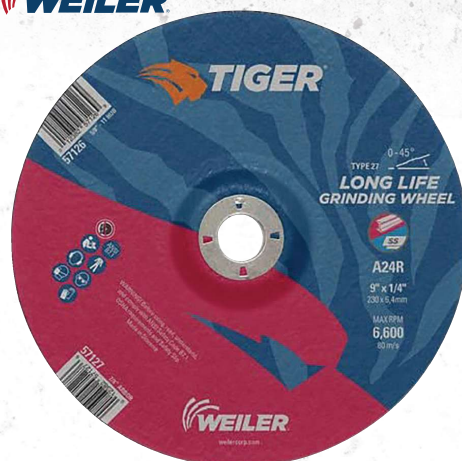

Tiger® AO Grinding Wheel

Thickness: 1/4 in

Tool Shape: Type 27

Grit: 24

SKU	Dia.	Arbor Size	Speed
804-57120	4-1/2 in	5/8 in-11	13300 RPM
804-57121	4-1/2 in	7/8 in	13300 RPM
804-57124	7 in	5/8 in-11	8500 RPM
804-57125	7 in	7/8 in	8500 RPM
804-57128	6 in	5/8 in-11	10200 RPM
804-57129	6 in	7/8 in	10200 RPM
804-57122	5 in	5/8 in-11	12200 RPM
804-57123	5 in	7/8 in	12200 RPM



Tiger® AO Type 27 Cut/Grind Combo Wheel

Thickness: 1/8 in

Tool Shape: Type 27

Grit: 30

SKU	Dia.	Arbor Size	Speed
804-57100	4-1/2 in	5/8 in-11	13300 RPM
804-57101	4-1/2 in	7/8 in	13300 RPM
804-57108	6 in	5/8 in-11	10200 RPM
804-57109	6 in	7/8 in	10200 RPM
804-57102	5 in	5/8 in-11	12200 RPM
804-57103	5 in	7/8 in	12200 RPM
804-57105	7 in	7/8 in	8500 RPM
804-57104	7 in	5/8 in-11	8500 RPM

MARKAL®



NEW PRODUCT

QUIK STIK®+


— **GLOW IN THE DARK** —

Solid paint marker creates marks that glow in the dark when charged with light.



See in the dark

with **marks that glow** for increased visibility

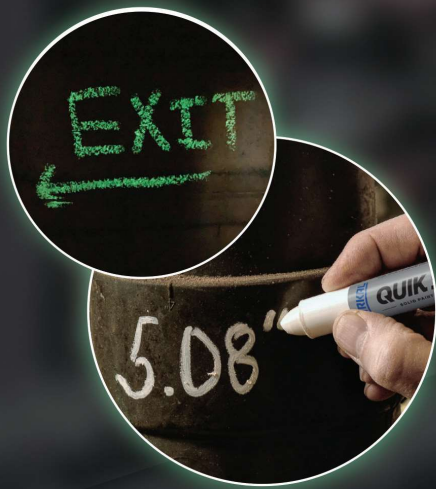

Photoluminescent white paint glows in the dark for up to 30 minutes when charged with light

Marks virtually any surface: dry, wet, smooth, rough or hot

Durable, plastic twist-up barrel advances and retracts by turning twist-up knob, reducing breakage and keeping hands, clothing and toolboxes clean

Easy-Grip Airtight Cap for convenient pocket storage. Keeps marker clean and fresh between uses.

Weather-resistant paint formula for long-lasting marks

Marking range: 0°F to 480°F (-15°C to 250°C)

- Pipes & Tubes
- Concrete & Stone
- Steel & Iron
- Lumber & Timber
- Plastic
- Ceramic
- Glass
- Rubber & Tires

- Inspections
- Construction
- System support
- Equipment Maintenance
- Shipbuilding
- Oil & Gas
- Mining
- Rail
- Search & Rescue

Part#: 434-28850

MADE IN USA ★




Rhino™ 6000+ Label Printer Kit

- Create, edit, and preview multiple labels on the large backlit LCD
- Customize more than 1,000 labels with logos and symbols
- PC connectivity
- Industrial Uses and Features:
Wire & Cable Wraps, Panels & Blocks, Flags, Fixed Length and Vertical, Electrical Features, Symbols & Terms Library

SKU	Prints Label
784-2122499	1/4 in - 1 in



THE BETTER WAY TO LABEL

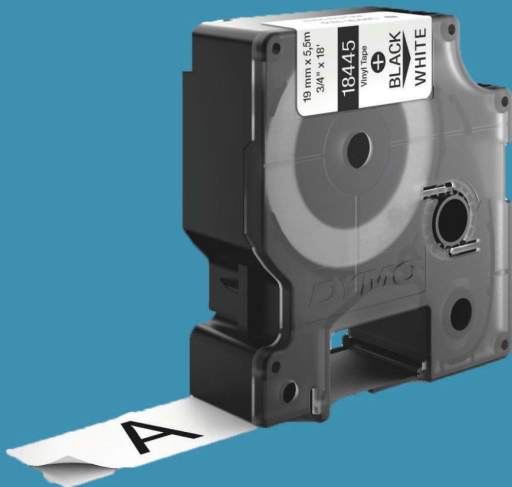

Industrial Rhino™ Vinyl Label Cartridge

- Black print on white background
- From textured surfaces to cables and wires, vinyl labels are ideal for almost any labeling application
- Easy-to-peel split-back design
- Thermal transfer printing technology
- Ideal for both indoor and outdoor applications

SKU	Length	Width
784-18443	18 ft	3/8 in
784-18444	18 ft	1/2 in
784-18445	18 ft	3/4 in

Honeywell

HOWARD
LEIGHT



VeriShield™ 100 Series Passive Earmuff


*Air Flow Control technology
for optimum attenuations
across all frequencies.*

SKU	Mounting	NRR Rating	Color
154-1035121-VS	Hard Hat	24dB	Black
154-1035124-VS	Hard Hat	27dB	Black
154-1035200-VS*	Hard Hat	23dB	Black
154-1035118-VS	Hard Hat	21dB	Black
154-1035186-VS*	Multi-Position	25dB	Black
154-1035187-VS*	Multi-Position	30dB	Black
154-1035112-VS	Neckband	22dB	Black
154-1035114-VS	Neckband	25dB	Black
154-1035116-VS	Neckband	28dB	Black
154-1035100-VS	Over-the-Head	24dB	Black
154-1035106-VS	Over-the-Head	27dB	Hi-Viz Yellow
154-1035108-VS	Over-the-Head	30 dB	Black
154-1035195-VS	Over-the-Head	29 dB	Black



ANCHOR
BRAND®

PURE QUALITY. PURE VALUE. SINCE 1963.

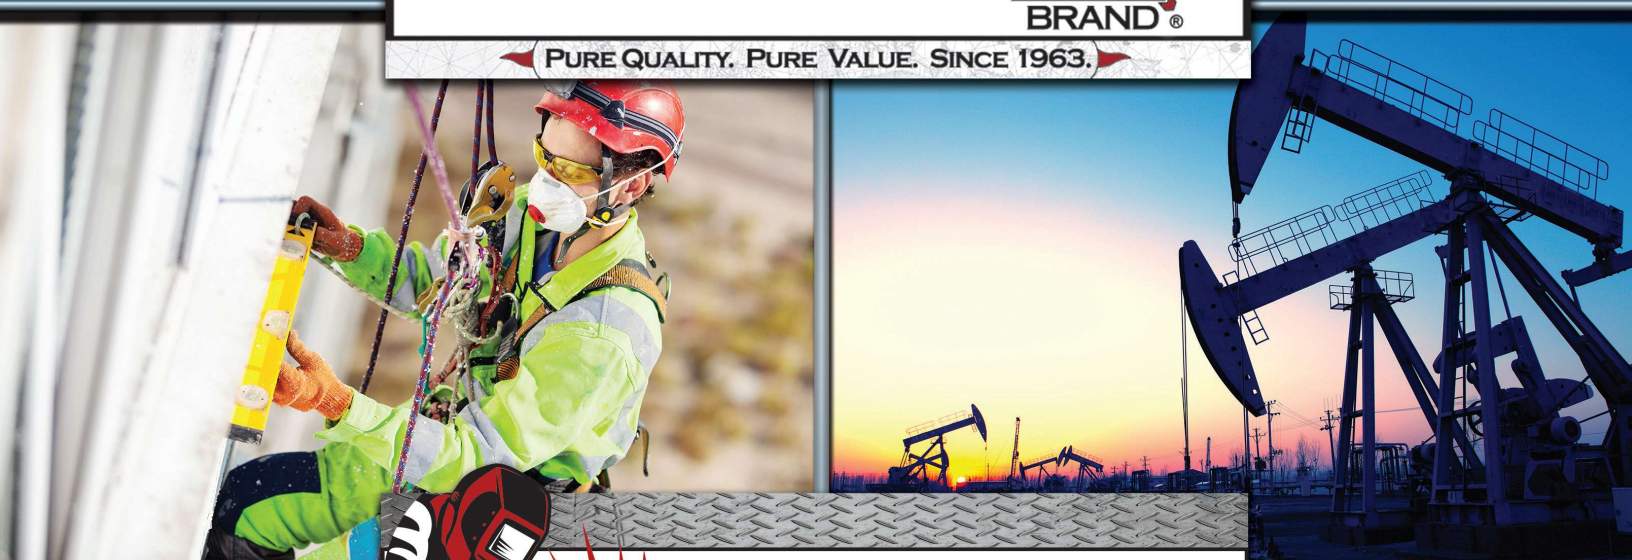

BEST WELDS®



INDUSTRIAL • WELDING • SAFETY • ENERGY • CONSTRUCTION
Great Value, Performance & Reliability at a Great Price