

With more than 60 years of expertise in the field, you're guaranteed that the iVario 320 kV generator has been built to go the distance to optimize the X-ray process. Its all-round flexible design offers a broad range of configuration possibilities that have been carefully considered to ensure safety, consistency and durability. With this advanced model, you can expect higher uptime, prolonged tube life and consistent results.

- Highly modular, versatile and configurable generator with settings that can be adapted to suit your specific needs.
- The intelligent arc-handling system with builtin characterization logic enables automatic arc detection, providing the optimal settings to prolong the lifespan of the X-ray tube.
- The tube library that comes with the generator includes optimized tube profiles (ramp-up and ramp-down profiles), prolonging the tube's lifespan with the best module (tubegenerator) integration.
- Additional accessories, such as a touchscreen control panel and an IP54 protection cover, make the iVario generator well suited to every application.







## **PRODUCT SPECIFICATIONS**

| VOLTAGE RANGE                                      | 15-320 kV         |
|--|-------------------|
| ADJUSTMENT INCREMENTS (minimum step)               | ≤ 0.1 kV          |
| ACCURACY   | ± 1% of max kV    |
| REPRODUCIBILITY (at constant temperature)          | ± 0.01% of max kV |
| LONG-TERM VOLTAGE STABILITY *                      | ± 0.1% of max kV  |
| TEMPERATURE-INDUCED DRIFT                          | ± 40 ppm/°C       |
| HIGH-VOLTAGE RIPPLE (with 10 m high-voltage cable) | 10 V/mA (min 40V) |

| EMISSION CURRENT RANGE                                      | 0-22.5 mA        |
|---|------------------|
| ADJUSTMENT INCREMENTS                                       | ≤ 0.01 mA        |
| ABSOLUTE ACCURACY   | ± 0.2% of max mA |
| REPRODUCIBILITY (at constant temperature)                   | ± 0.002 mA       |
| LONG TERM CURRENT STABILITY *                               | ± 0.1% of set mA |
| TEMPERATURE INDUCED DRIFT                                   | ± 50 ppm/°C      |
|   |                  |
| MAXIMUM POWER   | 4 500 W          |
| KV RAMP-UP AND RAMP-DOWN TIME BETWEEN TWO WORKING POINTS ** | < 300 ms         |


## **INTERFACES**

| HIGH-VOLTAGE CONNECTOR TYPE | R24                |
|-----------------------------|--------------------|
| DATA / CONTROL              | Ethernet<br>RS-232 |

## **DIMENSIONS**

| DIMENSIONS (HxWxL) | 375 x 910 x 640 mm |
|--------------------|--------------------|
| WEIGHT             | 166 kg             |
| APPROVALS          | CE, CB, NFC 74100  |

## **GENERATOR DIAGRAM**

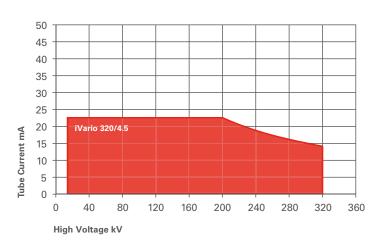

<sup>\*</sup> Over 8 hours at max kV/power after 1 hour warm-up



<sup>\*\*</sup> Can be further limited by the X-ray tube