



# PRO

## STORAGE FREEZERS WITH SOLID LIDS

### FEATURES

- Low service cost
- Long life
- Acoustic alarm
- Custom Graphics (Optional)
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)

Hold temperatures of -50 to -76° F



34.1"H  
25.8"D  
28.5"L

### PRO-11

Maintains approx. -50° to -76° F  
Regular Flip Lid  
110 Volts  
*UL Approved*



34.1"H  
25.8"D  
41.5"L

### PRO-21

Maintains approx. -50° to -76° F  
Regular Flip Lid  
110 Volts  
*UL Approved*



34.1"H  
25.8"D  
51.4"L

### PRO-31

Maintains approx. -50° to -76° F  
Regular Flip Lid  
110 Volts  
*UL Approved*

### Warranty:

(1) YEAR - PARTS AND LABOR  
(5) YEARS - COMPRESSOR ONLY

### Custom Graphics:

Pricing available upon request.

*\*Extended Warranty Available*






# PRO

## STORAGE FREEZERS WITH SOLID LIDS

DIMENSIONS	PRO 11	PRO 21	PRO 31
External dimensions (wxdxh)	28.5"x25.8"x34.1"	41.5"x25.8"x34.1"	51.4"x25.8"x34.1"
Internal dimensions (wxdxh)	20.5"x17.7"x25.6"	33.5"x17.7"x25.6"	43.3"x17.7"x25.6"
Dimensions A	28.5"	41.5"	51.4"
Dimensions B	25.8"	25.8"	25.8"
Dimensions C	34.1"	34.1"	34.1"
Dimensions D	30.7"	30.7"	30.7"
Dimensions E	20.5"	33.5"	43.3"
Dimensions F	12.6"	25.6"	35.4"
Dimensions G	17.7"	17.7"	17.7"
Dimensions H	25.6"	25.6"	25.6"
Dimensions J	15.7"	15.7"	15.7"
Dimensions L	33.5"	33.5"	33.5"
Insulation, mm	3.9	3.9	3.9

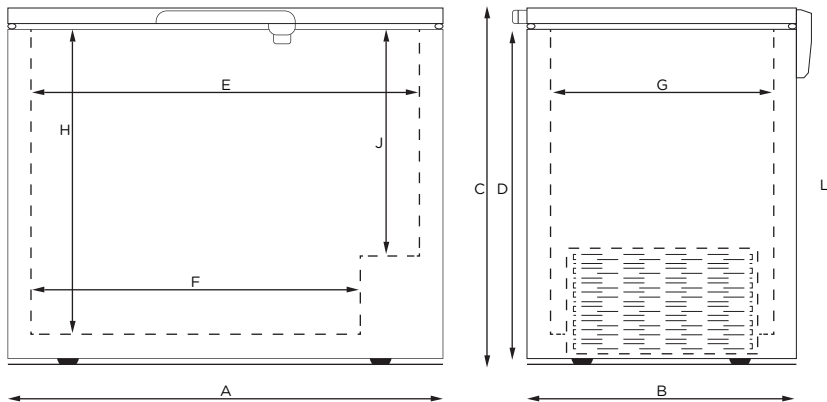

	PRO 11	PRO 21	PRO 31
Amb. Temp range deg. F	+50 to +86	+50 to +86	+50 to +86
Gross volume, cu. ft	4.6	8.0	10.6
Net volume, cu. ft	4.6	8.0	10.6
Temperature range inside unit	-50 to -76	-50 to -76	-50 to -76
Refrigerant: Mix of two Hyrdo carbons	Yes	Yes	Yes
Input power (watt) at 110 volt / 60hz:	480	500	540

