



High Output LED Indoor Grow Light

250W | 120-250VAC | Model 55402161 | Part GL-250-MV


- > Ideal for soil or hydroponic planting in greenhouses, nurseries, commercial growing operations, and indoor gardens
- > Accelerate plant growth for higher yields
- > Promote Vegetating or Flowering with selectable light spectrum
- > Consumes 58% less energy than 600 watt High Intensity Discharge
- > Emits less heat to avoid leaf burn
- > Does not emit UV Rays
- > Maintenance Free - No bulbs required
- > Built-in timer
- > 5 year limited warranty
- > Optional remote control allows full color spectrum tunability and grouping of multiple fixtures




SPECIFICATIONS

Model	55402161
Part	GL-250-MV
Description	High Output LED Indoor Grow Light
Input Voltage (VAC)	120-250
Wattage	250
Average Rated Life ¹	100,000 hours
Power Source	10 ft. power cord
Typical PPF	450 $\mu\text{mol/s}$
Location Rating	UL Damp Location
QE / Fixture	1.8 $\mu\text{mol/J}$
Beam Angle	≥ 100
Operating Temperature	Min 32°F (-0° C), Max 113°F (45° C)
Power Factor	>0.9
Operating Frequency (Hz)	50/60Hz
Spectrum Settings	Full Spectrum LED

Vegetating

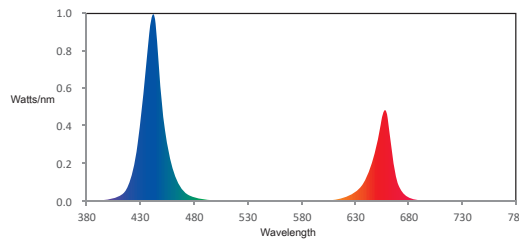

Flowering

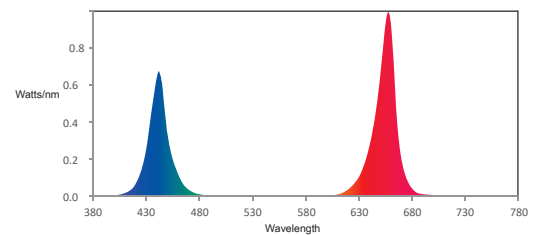

Brought to you by:



TO ORDER:

www.ETiSSL.com

Call: 1.855.ETi.SSLI

1.855.384.7754





VEGETATING		FLOWERING	
Red	41%	Red	70%
Green	0%	Green	0%
Blue	58%	Blue	30%



High Output LED Indoor Grow Light

250W | 120-250VAC | Model 55402161 | Part GL-250-MV

> Ideal for soil or hydroponic planting in greenhouses, nurseries, commercial growing operations, and indoor gardens



SHIPPING INFORMATION

Model	55402161
Part	GL-250-MV
UPC	849489009308
Product Dimensions (L x W x H in.)	19 3/4 x 13 7/8 x 5 1/2
Product Dimensions (L x W x H cm.)	50 x 35 x 13.8
Product Weight (lbs.)	17.86 lbs

ADDITIONAL PARTS AVAILABLE TO PURCHASE

Model #	Description
90600366	Remote Control



90600366 - GrowElite™
Grow Light
Remote Control

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

Brought to you by:



TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: 855.384.7754
Fax: 847.383.6256