




### LED Vapor Tight 3 Wattage and 3 CCT Selectable

Project: \_\_\_\_\_ Location: \_\_\_\_\_  
Date: \_\_\_\_\_ Part #: \_\_\_\_\_  
Notes: \_\_\_\_\_



#### Performance & Features

##### LED Source

- High efficacy, micro power LED with 3 CCT Selectable (3500K/4000K/5000K)
- CRI >80
- 0-10V dimmable driver
- 75W Fluorescent Replaces
- 120-277V input
- Auxiliary 12V output
- Available Emergency Backup
- Operating temperature: -20°C to 40°C

##### Construction

- Durable polycarbonate housing, white cover & stainless
- L70 rated Life for 100,000 hours

##### Certifications and Warranty

- cULus Listed
- NSF, NEMA4X approved
- Backed by a 5-year limited warranty

#### SKU Guide

Example: VPT2-20T30W-3CCT-DV2-GR

| Family and Size                        | Wattage                                                                 | CCT                            | Driver & Voltage     |               | Finish    | Options                                     |
|----------------------------------------|-------------------------------------------------------------------------|--------------------------------|----------------------|---------------|-----------|---------------------------------------------|
| VPT2 = 2FT<br>VPT4 = 4FT<br>VPT8 = 8FT | 20T30W =<br>20/25/30W<br>40T60W =<br>40/50/60W<br>60T90W =<br>60/75/90W | 3CCT = 3500K<br>4000K<br>5000K | D = 0-10V<br>Dimming | V2 = 120-277V | GR = Gray | EM = Battery Backup<br>S = Microwave Sensor |

## Specification

| Model No.                             | Power (W)   | Lumens (lm)           | CCT (K)         | LPW | Finish |
|---------------------------------------|-------------|-----------------------|-----------------|-----|--------|
| <b>2FT</b><br>VPT2-20T30W-3CCT-DV2-GR | 20W/25W/30W | 2600<br>3250<br>3900  | 3500/4000/5000K | 130 | Gray   |
| <b>4FT</b><br>VPT4-40T60W-3CCT-DV2-GR | 40W/50W/60W | 5200<br>6500<br>7800  | 3500/4000/5000K | 130 | Gray   |
| <b>8FT</b><br>VPT8-60T90W-3CCT-DV2-GR | 60W/75W/90W | 7800<br>9750<br>11700 | 3500/4000/5000K | 130 | Gray   |

Contact for custom configurations & specifications

## Accessories




**Mounting Bracket**  
(Included)



**EM Battery Backup**  
VPT-BBU-8W




**Microwave Sensor**  
VPT-MS



**Wire Guard**  
VPT-4FT-WG  
VPT-8FT-WG


## Dimensions

VPT2-20T30W-3CCT-DV2-GR

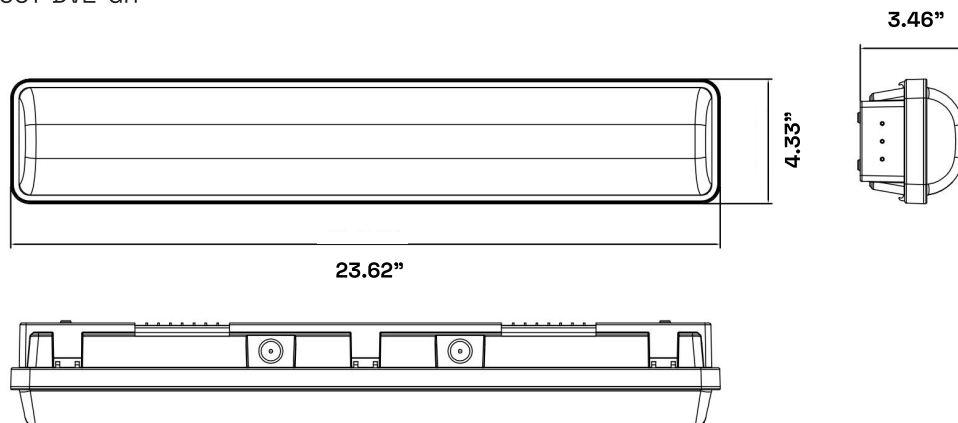


## Dimensions

VPT4-40T60W-3CCT-DV2-GR

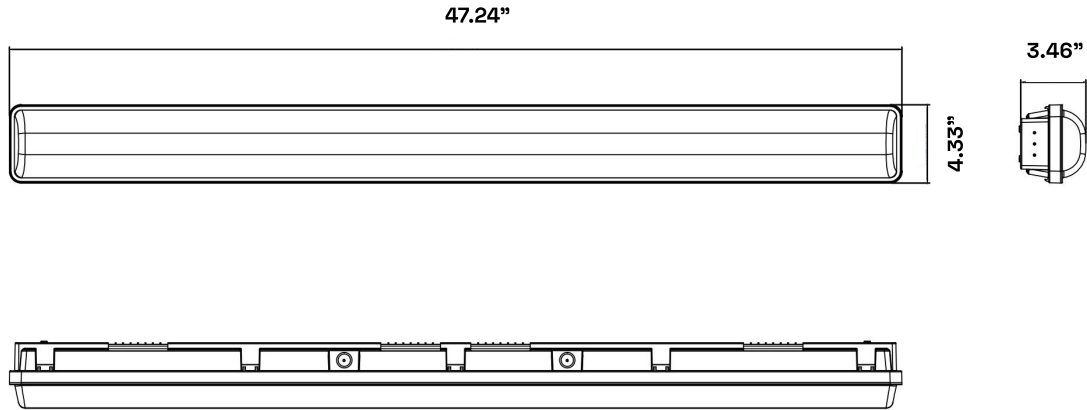

VPT8-60T90W-3CCT-DV2-GR

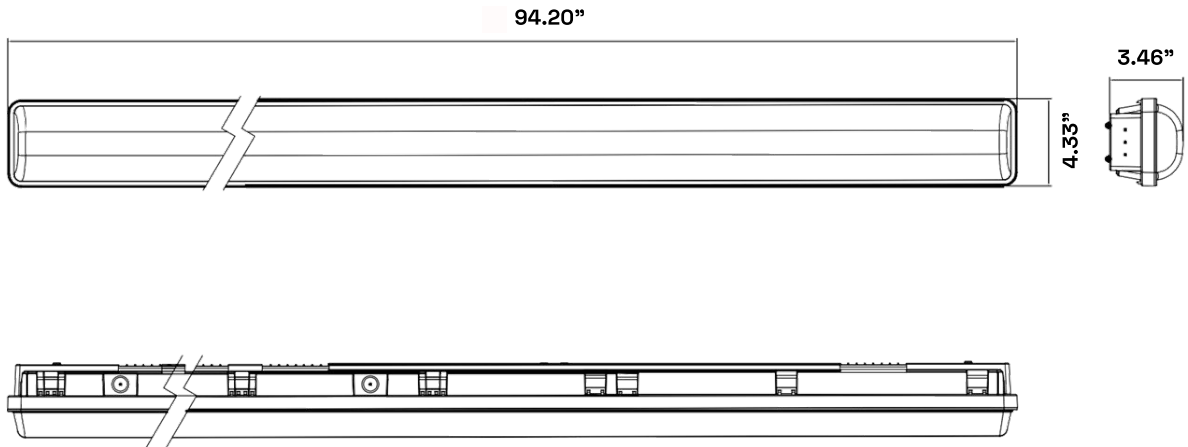



| Model Number            | Dimensions             |
|-------------------------|------------------------|
| VPT2-20T30W-3CCT-DV2-GR | 23.62 x 4.33 x 3.46 in |
| VPT4-40T60W-3CCT-DV2-GR | 47.24 x 4.33 x 3.46 in |
| VPT8-60T90W-3CCT-DV2-GR | 94.20 x 4.33 x 3.46 in |

## Packaging Dimensions

| SKU#                    | Inner Box             | Qty | Master Box              | Qty |
|-------------------------|-----------------------|-----|-------------------------|-----|
| VPT2-20T30W-3CCT-DV2-GR | 24.17x 4.64 x 3.74 in | 1   | 24.80 x 19.48 x 8.26 in | 8   |
| VPT4-40T60W-3CCT-DV2-GR | 47.80x 4.64 x 3.74 in | 1   | 48.42 x 19.37 x 8.26 in | 8   |
| VPT8-60T90W-3CCT-DV2-GR | 94.60 x4.64 x 3.74 in | 1   | 95.27 x 9.92 x 8.26 in  | 4   |

## Photometry

VPT2-20T30W--3CCT-DV2-GR

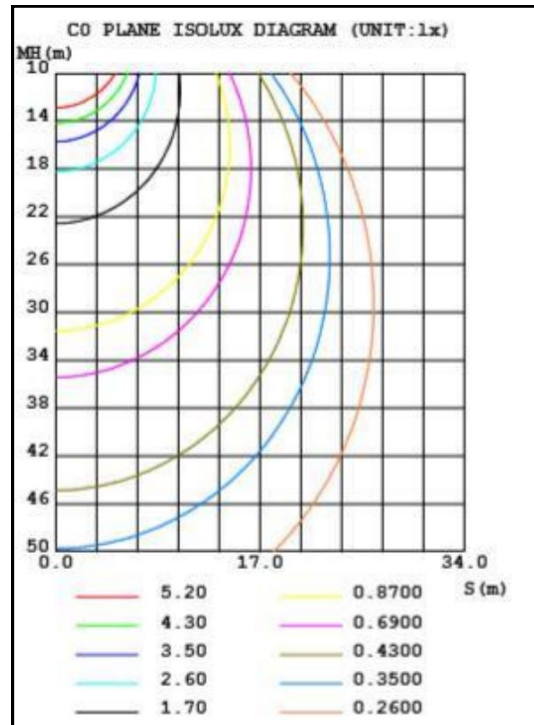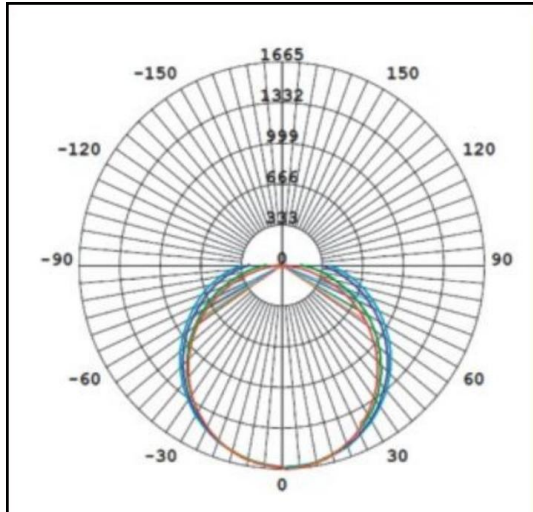

**Note:** Additional Photometry available on request