




Bollard Pull Test

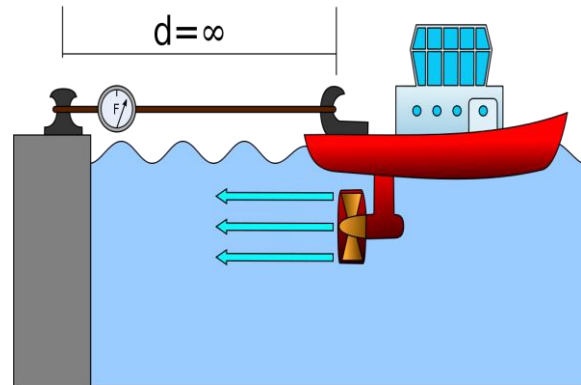

Euroload Limited have 30 years experience supplying load monitoring equipment suitable for carrying out Bollard Pull tests. Understanding the application is the key for us.

Supplying equipment suitable for submersion should the test go wrong. A telemetry signal that will carry on transmitting once the unit is lifted free of the water.

A strong telemetry signal capable of transmitting up to 1.6KM using our signal repeater. 800 meters as standard. Redundancy built into load cell should the telemetry signal fail or be overpowered. Long battery life. Easily changed battery's should they go flat.

Various readout options including: large 4" digit display, USB receiver to carry out full data logging, multiple remote readouts for key personnel.

Our standard telemetry load links and shackles can be submerged to 14 meters with no water ingress.

Give our sales team a call to discuss your application further. We have sales agents worldwide who can perform the Bollard pull test on site locally.

Tel: +44 1224 774115 andy@euroload.eu info@euroload.eu