



Driving Global Safety

Product Catalogue


2018

English

**Preventing collisions
and saving lives!**

Contents

Backeye®360	4
Backeye® Camera Monitor Systems	9
Cameras	11
Monitors	15
Kits	20
Truck and Trailer Connection	24
Adapter Cables	28
Cables	30
Ancillaries	31
Mobile Digital Recording	33
Ultrasonic Obstacle Detection	37
Backsense® Radar Obstacle Detection	43
Reversing and Warning Alarms	46
bbs-tek® White Sound Alarms	47
Speaking Alarms	49
Ancillaries	51
Warranties	52
Glossary	53
International Distributors	54

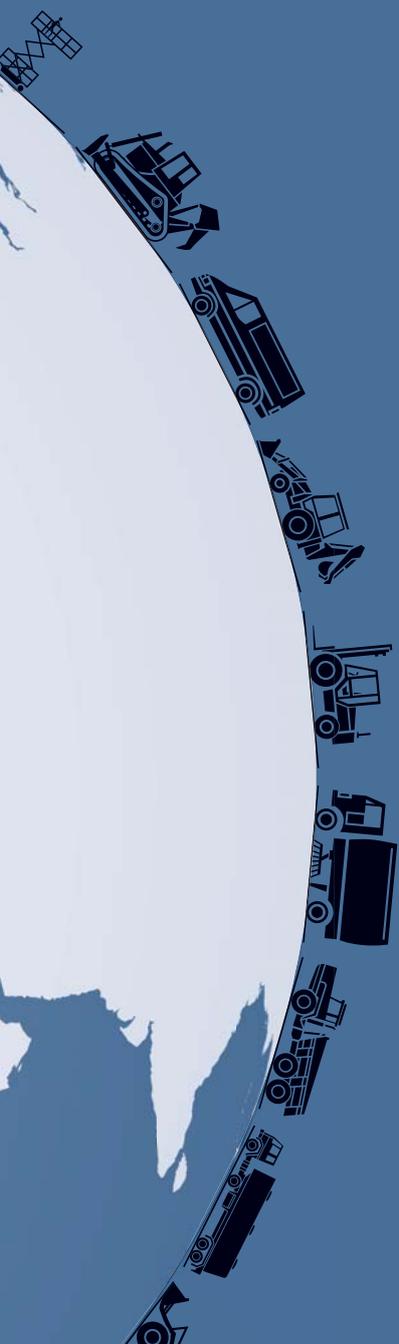

Driving Global Safety

Backeye®360° Camera Systems

Backeye®360 is an intelligent camera monitor system designed to assist low-speed manoeuvring by providing the driver with a complete surround view of the vehicle in real time.

Brigade offers a choice of 360° technologies, which work with four ultra wide-angle cameras, each one covering one full side of the vehicle with a viewing angle of over 180°.

High-mounted on the front, rear and sides, the calibrated cameras capture all of the surrounding area including the blind spots of the vehicle or machine.


The four live images are simultaneously sent to an electronic control unit (ECU) where they are instantly processed, combined, blended and stitched. The distortion from the wide-angle camera lens is also corrected before delivering a clear, single, smooth, real-time image onto the driver's monitor.

Backeye®360 is compatible with Brigade's MDR recording systems.



Actual Backeye®360 images

Backeye®360 BN360-200 monitor view options

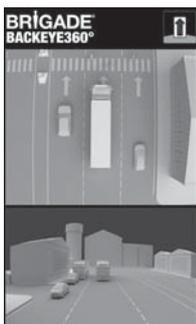

360 & mirrored rear view




Full 360 view




Full mirrored left/right view



Full mirrored rear view

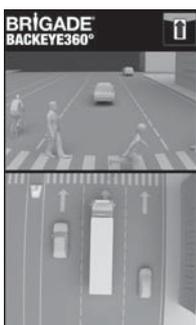


Front view & 360

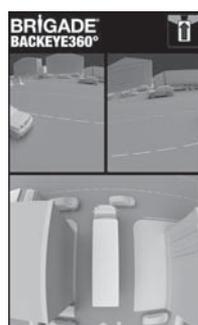

Front cross-traffic & 360



Mirrored rear view & 360

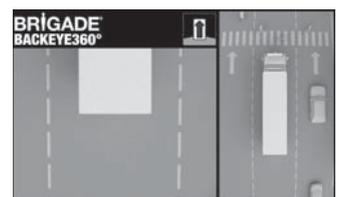


Rear focus & 360



Mirrored left/right view & 360



Full 360 left/right focus

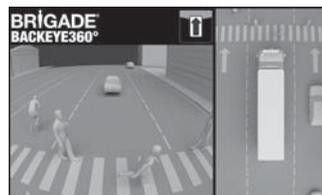


Front view & 360



Front cross-traffic view



Mirrored left/right view & 360

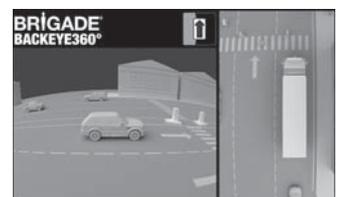

Mirrored left/right view & left/right focus 360


Which system is for you?

Backeye®360 BN360-200

- Suitable for most vehicle and mobile plant machines
- 19 monitor view options including cross traffic and right/left lane-change assist
- Configuration and views can be tailored to each application
- Speed trigger to show specific view at configured speed
- Custom views and vehicle positioning e.g. 270° views for articulated vehicles
- Portrait and landscape monitor view options including split-screen
- Configurable on-screen parking markers

Backeye®360 ASL360

- Suitable for most vehicle and mobile plant machines
- Full screen 360 plus bespoke split screen viewing options
- 'Pie Dish' image correction provides a more natural view of objects that are at some distance from the vehicle, allowing a wider area to be displayed to the driver
- Automatic light balancing between camera images makes for easier viewing when one side of the vehicle is in bright sunlight and the other is in shadow

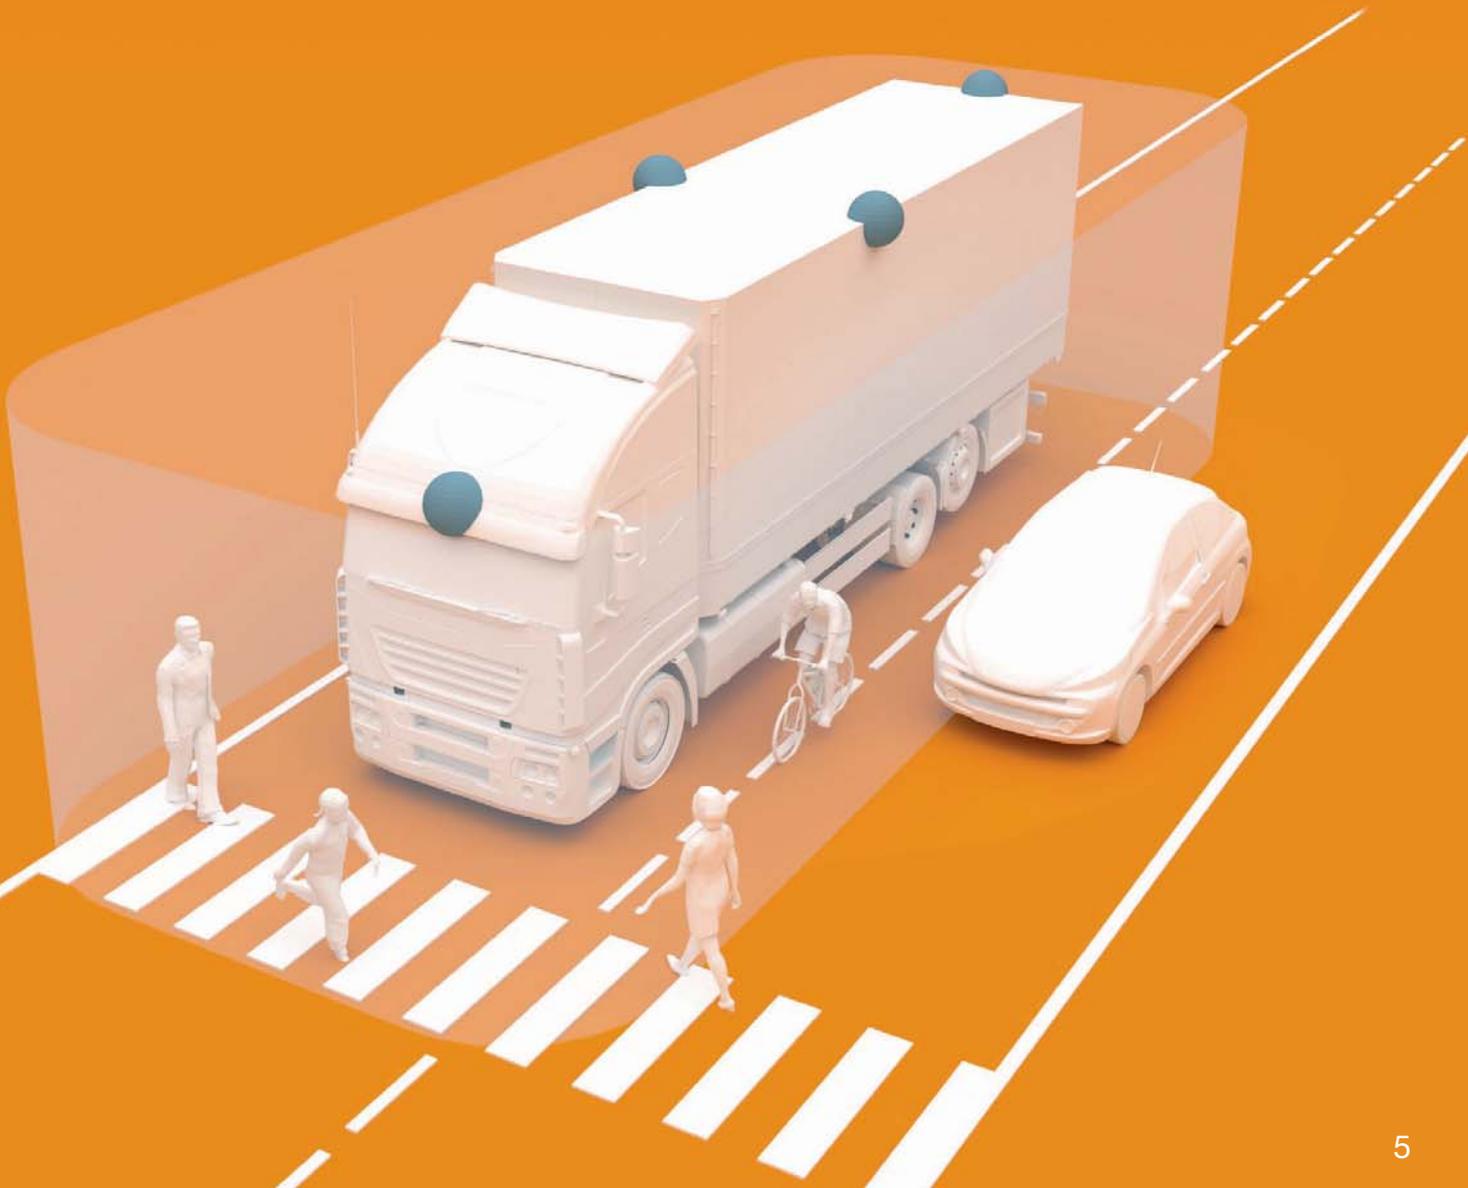

Model

Part No:

360° CAMERA SYSTEM

BN360-200 - Backeye®360 system

5200



- IP69K cameras
- 12-24Vdc
- Size (WxHxD) ECU
174 x 101 x 30mm
- Size (WxHxD) Camera
36 x 61 x 46mm
- 2 year warranty

Contents

- 1 x ECU
- 4 x BN360-100C cameras
- 1 x Video output cable to connect to SELECT range monitor.
- 1 x set-up/view-select button
- IR receiver & remote control
- 1 x ECU power harness
- 1 x ECU interface harness

- (HxV) 185° x142°
- 1/3.6" CMOS sensor
- TV system: NTSC & PAL (via switch)

Power

- Power consumption: 8 Watts
- Current: 0.65 Amps

Durability & Standards

- Mechanical vibration: 8.5G
- Mechanical shock: 50G
- Operating temperature: -30 to +75°C
- IP30 ECU
- CE marked
- EMC approved: E
- FCC Approved
- IC Approved
- HALT tested

Notes:

- calibration kit is required for installation.
- Monitor and camera extension cables not included

Features

- 360° image
- 19 different view modes (max 10 views per chosen configuration group) including:
 - Landscape or portrait configurations
 - Front & rear crossing-traffic
 - Left & right lane changing assist
 - Customisable vehicle position
- 4 pre-defined configuration groups
- Configure & customise set up via monitor and IR remote control
- Left, right, reverse & speed signal triggers
- Configurable on-screen parking markers
- 4 x triggers
- 3 x video outputs
- Ultra-wide viewing angle cameras

BN360 CABLES AND ADAPTERS

BN360-L120	20m camera cable	4493
BN360-L115	15m camera cable	4495
BN360-L110	10m camera cable	4496
BN360-L105	5m camera cable	4498
BN360-L1025	2.5m camera cable	4499
AC-305	Splitter cable for MDR (1 required per camera)	4903

MOUNTING BRACKETS



BN360-100C-BKT01	Adaptable mounting bracket <small>Can be shaped to allow installation on non-vertical surfaces</small>	4649
BN360-100C-BKT02	Mounting bracket to adjust camera angle	4714
BE360-CD	Deflector to shield camera from knocks <small>(To be used with BN360-100C-BKT02 Mounting bracket)</small>	4701
BN360-100C-BKT03	Deflector to shield camera from knocks	4743

REQUIRED FOR ARTICULATED VEHICLES

BN360-Enclosure	IP66 Enclosure kit to enable ECU to be installed on outside of vehicle <small>Note: Coiled cable kit or wireless connector also required</small>	4723
SK-15-05	3-camera Backeye®360 cable kit for articulated vehicles	5066

Model

Part No:

360° CAMERA SYSTEM

ASL360-SV - Backeye®360

4328



- IP68 cameras
- 12-24Vdc
- Size (WxHxD) ECU
225 x 35 x 120mm
- Size (WxHxD) Camera
70 x 50 x 62mm
- 2 year warranty

Contents

- 1 x ASL360-ECU
- 4 x ASL360-CM2 cameras

Note: Monitor, camera cables and adapters NOT included

Features

- 360° full screen or split screen options
- Flexible blend widths and positioning
- Up to 30 frames per second
- Self-monitoring to eliminate frozen images
- Triggered views
- 4 x ultra-wide viewing angle cameras (HxV) 185 x 180°
- 1/4" CMOS sensor
- TV system: PAL

Power

- Power consumption:
Camera: 0.5 Watts
ECU: 5.0 Watts
- Current:
Camera: 0.04 Amps
ECU: 0.4 Amps

Durability & Standards

- Operating temperature:
-40 to +85°C
- CE marked
- EMC approved: E

Note: A calibration kit is required for installation. Available to Brigade trained fitters only

ASL360 CABLES AND ADAPTERS

ASL360-L120	20m camera cable	4333
ASL360-L115	15m camera cable	4334
ASL360-L110	10m camera cable	4335
ASL360-L1025	2.5m camera cable	4336
AC-054	2.5m adapter cable to connect ECU to monitor via AC-016 / AC-024 (BNC B to Phono A)	4340
AC-016	Adapter cable to connect AV/Phono to Elite monitor	2150
AC-024	Adapter cable to connect AV/Phono to Select monitor	3183

MOUNTING BRACKET

BE360-CD	Deflector to shield camera from knocks	4701
----------	--	------

REQUIRED FOR ARTICULATED VEHICLES

BN360-Enclosure	IP66 Enclosure kit to enable ECU to be installed on outside of vehicle	4723
-----------------	--	------

Note: Coiled cable kit or wireless connector also required



Model

Part No:

BN360 360° CAMERA MONITOR SYSTEMS

Complete kits including monitor, Backeye®360 camera system, cables and adapters



SE-7104F-100 - 360 camera monitor system for large rigid vehicles

5378



- 1 x VBV-7104FM - 10.4" monitor
- 1 x BN360-200 360 system
- 1 x BN360-L110 - 10m camera cable
- 2 x BN360-L115 - 15m camera cables
- 1 x BN360-L120 - 20m camera cable

See individual products for detailed specifications

- 2 year system warranty



SE-770-100 - 360 camera monitor system for large rigid vehicles

5379



- 1 x VBV-770M 7" monitor
- 1 x BN360-200 360 system
- 1 x BN360-L110 - 10m camera cable
- 2 x BN360-L115 - 15m camera cables
- 1 x BN360-L120 - 20m camera cable

See individual products for detailed specifications

- 2 year system warranty

ASL360 360° CAMERA MONITOR SYSTEMS

Complete kits including monitor, Backeye®360 camera system, cables and adapters



SE-770-000 - 360 camera monitor system for large rigid vehicles

4803



- 1 x VBV-770M - 7" monitor
- 1 x ASL-360SV 360 system
- 1 x ASL-L110 - 10m camera cable
- 2 x ASL-L115 - 15m camera cables
- 1 x ASL-L120 - 20m camera cable
- 1 x AC-024 - phono adapter cable
- 1 x AC-054 - adapter cable

See individual products for detailed specifications

- 2 year system warranty

Backeye® Camera Monitor Systems

Which range is for you?

Backeye® Elite

Top of the range systems for comprehensive blind-spot coverage. Suitable for large road-going vehicles, specialist applications, heavy duty off-road machines or where the cab is exposed to the elements.



Backeye® Select

Mid-range systems suitable for medium to large road-going vehicles.



Backeye® Essential

Entry level reversing solution ideally suited to light commercial vehicles and vans.



Backeye® Camera Monitor Systems

Choosing your Backeye® camera monitor system

Select from our range of popular complete standard systems featured on pages 20-23 or build your own system referring to the camera monitor compatibility chart below, adding cables, adapters and ancillaries to connect and upgrade your system.

Camera/monitor compatibility for building your own system.

✓ = Compatible AC-0xx = Compatible with adapter(s) shown ✕ = Not compatible			MONITORS			
			ELITE		SELECT	
			BE-970WFM BE-970WM BE-865DDM BE-870LM BE-870FM	BE-856GM	VBV-7104FM VBV-770FM VBV-770M VBV-750M	VBV-770M-S VBV-750M-S
CAMERAS	ELITE	BE-810C shutter camera	✓	SC-1000-ECU	AC-007 + SC-1000-ECU	✕
		All other Elite range cameras	✓	✓	AC-007	AC-007
	SELECT	VBV-710C shutter camera	AC-035 + AC-006	AC-035 + AC-006	AC-035	✓
		All other Select range cameras	AC-006	AC-006	✓	✓
FLIR	PathFindIR II	AC-016 + AC-065	AC-016 + AC-065	AC-024 + AC-065	AC-024 + AC-065	✓

Ultrasonic Detection On-Screen Display Module





- Integration of Brigade's ultrasonic obstacle detection systems and camera monitor systems
- Ultrasonic detection warnings overlaid onto camera image on in-cab monitor
- Reduced driver stress and distractions as all information is in one view

Sensor data and camera image combined

Brigade's ultrasonic proximity sensors minimise both vehicle damage and collisions with pedestrians, cyclists or objects. Perfect for road-going commercial vehicles operating in confined spaces or manoeuvring at low speed.

Working in conjunction with a Backeye® camera monitor system and up to two ultrasonic detection systems, the on-screen display module warns the driver of obstacles close to the vehicle by overlaying 3-stage audible and visual ultrasonic data onto the camera image on the monitor.

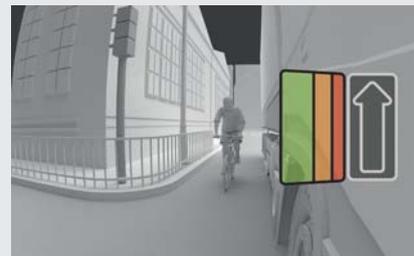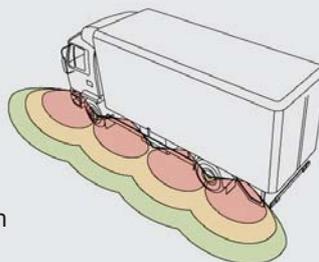

See page 42 for further details

Model

Part No:

ELITE CAMERA



BE-800C	- PAL	1623
BE-800C(40)	- Narrow viewing angle: 33 x 25 x 40° PAL	1559
BE-800C(78)	- Narrow viewing angle: 64 x 47 x 78° PAL	1426
BE-890C	- Waterproof to IP69K, No audio PAL	2871
BE-850C	- 12/24Vdc Waterproof to IP69K PAL	4924
BE-801C	- NTSC	1905
BE-801C(40)	- Narrow viewing angle: 33 x 25 x 40° NTSC	2085
BE-801C(78)	- Narrow viewing angle: 64 x 47 x 78° NTSC	2084

- Viewing angle (HxVxD)
101 x 72 x 133° PAL
100 x 69 x 133° NTSC

- IP68

- Size (WxHxD)
86 x 72 x 80mm

- 3 year warranty + optional 2 further years on registration



Features

- 5 Infrared LEDs for ultra-low light performance
- 5m illumination distance
- Heater
- Audio
- Day / Night sensor
- Mirror / Normal view
- 1/3" Sony CCD
- TV System: PAL or NTSC
- TV lines: 450

Durability & Standards

- Mechanical vibration: 20G (HALT)
- Mechanical shock: 100G
- Operating temperature: -40 to +85°C
- CE marked
- FCC Approved
- EMC approved: E
- HALT tested
- ISO 13766: 2006
- BN EN13309
- Corrosion Test - ISO 16750-4

Power

- Power consumption: 4 Watts
- Current: 0.33 Amps (0.33 - 2.63 Amps BE-850C)

ELITE CAMERA



BE-810C - Shutter camera

1242

- Viewing angle (HxVxD)
103 x 71 x 134°

- IPX9K

- Size (WxHxD)
123 x 86 x 80mm

- 3 year warranty + optional 2 further years on registration



Features

- 6 Infrared LEDs for ultra-low light performance
- 5m illumination distance
- Shutter
- Heater
- Audio
- Day / Night sensor
- Mirror / Normal view
- 1/3" Sony CCD
- TV System: PAL
- TV Lines: 400

Power

- Power consumption: 7 Watts
- Current: 0.4 Amps

Durability & Standards

- Mechanical vibration: 7G
- Mechanical shock: 100G
- Operating temperature: -40 to +70°C
- CE Marked
- EMC approved: E

ELITE CAMERA



BE-820C - Mini camera (mirror image) PAL	1927
BE-821C - Mini camera (mirror image) NTSC	2002
BE-822C - Mini camera (normal image) PAL	2151
BE-823C - Mini camera (normal image) NTSC	5100

- Viewing angle (HxVxD)
115 x 92 x 140° PAL
113 x 90 x 136° NTSC

- IP68

- Size (WxHxD)
47 x 40 x 50mm

- 3 year warranty

Features

- 1/4" Sony CCD
- TV System: PAL or NTSC
- TV Lines: 600

Power

- Power consumption: 0.9 Watts
- Current: 0.1 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock: 100G
- Operating temperature: -40 to +80°C
- CE marked
- EMC approved: E
- FCC approved (NTSC models only)
- IC approved (NTSC models only)
- HALT tested

Model

Part No:

ELITE CAMERA



DMC-1025 - Mini camera (internal use) PAL
DMC-1021 - Mini camera (internal use) NTSC

4910
5163

• **Viewing angle (HxVxD)**
 69 x 54 x 90° PAL
 76 x 55 x 98° NTSC

• **IP30**

• **Size (WxHxD)**
 43 x 45 x 37.5mm

• **3 year warranty**



Features

- Mirror / Normal view
- Backlight compensation
- Automatic white balance
- 1/3" Sony CCD
- TV System: PAL or NTSC
- TV Lines: 550 PAL / 400 NTSC

Power

- Power consumption: 1.0 Watt
- Current: 0.07 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock: 50G
- Operating temperature: -30 to +60°C
- CE marked
- EMC Approved: E
- FCC Approved

ELITE CAMERA



MD-50 - Mini dome camera PAL
MD-51 - Mini dome camera NTSC

4909
5164

• **Viewing angle (HxVxD)**
 69 x 54 x 90° PAL
 76 x 55 x 98° NTSC

• **IP66**

• **Size (Diameter x H)**
 76 x 59.2mm

• **3 year warranty**



Features

- Dome camera with 150° movement range in all directions
- Can be used internally or externally
- Mirror / Normal view
- Backlight compensation
- Automatic white balance
- 1/3" Sony CCD
- TV System: PAL or NTSC
- TV Lines: 550 PAL / 400 NTSC

Power

- Power consumption: 1 Watt
- Current: 0.07 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock 50G
- Operating temperature: -30 to +60°C
- CE marked
- EMC Approved: E
- FCC Approved

OPTIONAL EXTRAS



MD-50SM-30 - Surface mounting adapter (30mm deep)

5003

MD-50AM-15 - Angled surface mounting adapter (adds 15°)

5004

MD-50AM-25 - Angled surface mounting adapter (adds 25°)

5005

SELECT CAMERA



VBV-710C - Shutter camera

2808

Direct connection to VBV-770DM-S and VBV-750DM-S monitors via 5-pin 10m (VBV-L510) or 20m (VBV-L520) camera cable. Use AC-035 5-pin to 4-pin adapter for connection to other Select monitors

• **Viewing angle (HxVxD)**
 90 x 70 x 110°

• **IP69K**

• **Size (WxHxD)**
 122 x 85 x 82mm

• **2 year warranty**



Features

- 12 Infrared LEDs for ultra-low light performance
- 10m illumination distance
- Shutter
- Heater
- Audio
- Day / Night sensor
- Mirror / Normal view
- 1/3" Sharp CCD
- TV System: PAL
- TV Lines: 420

Power

- Power consumption: 4.6 Watts
- Current: 0.38 Amps

Durability & Standards

- Mechanical vibration: 2.8G
- Mechanical shock: 50G
- Operating temperature: -20 to +70°C
- CE Marked
- EMC approved: E

Model

Part No:

SELECT CAMERA



VBV-700C	- PAL	1379
VBV-701C	- NTSC	2575
VBV-790C	- Waterproof to IP69K, no audio PAL	2724
VBV-791C	- Waterproof to IP69K, no audio NTSC	2842

- **Viewing angle (HxVxD)**
88 x 68 x 115° PAL
86 x 72 x 122° NTSC
- **IP67**
- **Size (WxHxD)**
81 x 77 x 70mm
- **2 year warranty**



Features

- 4 high-power Infrared LEDs for ultra-low light performance
- 7m illumination distance
- Audio
- Day / Night sensor
- Mirror view
- 1/3" Sharp CCD
- TV Lines: 620 PAL / 750 NTSC

Power

- Power consumption: 3 Watts
- Current: 0.2 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock: 51G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E
- FCC Approved

SELECT CAMERA



VBV-300C	- Compact flush-mount eyeball camera - Mirror view - PAL	5211
VBV-301C	- Compact flush-mount eyeball camera - Mirror view - NTSC	5213
VBV-320C	- Compact flush-mount eyeball camera - Normal view - PAL	5215
VBV-321C	- Compact flush-mount eyeball camera - Normal view - NTSC	5217

- **Viewing angle (HxVxD)**
110 x 82 x 152° PAL
111 x 80 x 153° NTSC
- **IP69K**
- **Size (WxHxD)**
57 x 42 x 70mm
- **2 year warranty**



Features

- Lens swivel adjustment: 26° (Top) x 4° (Bottom) x 4° (Left) x 4° (Right)
- Lens rotation adjustment: ±180°
- 5 high power infrared LEDs for ultra-low light performance
- 3 x 4.5m illumination distance
- Day / Night sensor
- Integrated microphone
- 1/3" Sharp CCD
- TV System: PAL or NTSC
- TV lines: 780 PAL, 600 NTSC

Power

- Power consumption: 2.3 Watts
- Current consumption: 0.16 Amps

Durability & Standards

- Mechanical vibration: 8.5G
- Mechanical shock: 51G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E
- FCC approved

OPTIONAL EXTRAS

SM-3XX-25	Surface mounting adapter (25mm deep)	4596
------------------	--------------------------------------	-------------

Camera icons

- Infrared LEDs for ultra-low-light performance
- Day/night sensor
- Audio
- Heater
- Normal/mirror view

Model

Part No:

SELECT CAMERA

VBV-485C - Cylinder camera

2199



- Viewing angle (HxVxD)
90 x 69 x 117°
- IP67
- Size (Diameter x Length)
35 x 50mm
- 2 year warranty



Features

- 9 LEDs for ultra-low light performance
- 10m illumination distance
- Mirror view
- 1/3" Sharp CCD
- TV System: PAL
- TV Lines: 420

Power

- Power consumption: 2.4 Watts
- Current: 0.2 Amps

Durability & Standards

- Mechanical vibration: 10G
- Operating Temperature: -30 to +70°C
- EMC approved: E
- CE marked

THERMAL IMAGING CAMERA

PF-30N-500 - PathFindIR II with automatic detection 30Hz

334-0050-00

PF-075N-540 - PathFindIR II with automatic detection 7.5Hz

334-0054-00



- 12Vdc
- Viewing angle (HxV)
24 x 18°
- IP69 (Camera)
- Size (WxHxD)
Camera: 60 x 86 x 82mm
ECU: 148 x 110 x 24mm
- 1 year warranty



Contents

- Camera, ECU, camera to ECU cable and power cable

Features

- Automatic detection and alerts of pedestrians and animals
- Produces a clear image, even in total darkness.
- See through smoke, dust and light fog
- Automatic heater element
- See past the glare of oncoming headlights
- Sees up to 4 times further than vehicle headlights

Image

- 320 x 240 Uncooled Microbolometer
- Spectral range: 8 - 14µm
- Image Frequency: 7.5/30Hz (NTSC)

Power

- Power consumption: 6 Watts

Durability & Standards

- IP69
- Operating Temperature: -40 to 80°C

THERMAL IMAGING CAMERA

PF-30N-520 - PathFindIR II 30Hz

334-0052-00

PF-075N-560 - PathFindIR II 7.5Hz

334-0056-00



- 12Vdc
- Viewing angle (HxV)
24 x 18°
- IP69 (Camera)
- Size (WxHxD)
Camera: 60 x 86 x 82mm
ECU: 148 x 110 x 24mm
- 1 year warranty



Contents

- Camera, ECU, camera to ECU cable and power cable

Features

- Produces a clear image, even in total darkness.
- See through smoke, dust and light fog
- Automatic heater element
- See past the glare of oncoming headlights
- Sees up to 4 times further than vehicle headlights

Image

- 320 x 240 Uncooled Microbolometer
- Spectral range: 8 - 14µm
- Image Frequency: 7.5/30Hz (NTSC)

Power

- Power consumption: 6 Watts

Durability & Standards

- IP69
- Operating Temperature: -40 to 80°C

OPTIONAL EXTRAS

PFM-0001 PathFindIR II mounting bracket

4692

Model

Part No:


ELITE MONITOR



BE-970WFM - Waterproof 7" Quad digital LCD monitor

3560

- 12-24Vdc
- IP69K
- Size (WxHxD)
194 x 124 x 48mm
- 3 year warranty + optional 2 further years on registration



Plus additional in-built image options

Features

- 4 camera inputs
- Shutter camera compatible (inputs 1&2)
- Backlit touch screen button panel
- 'Button-lock' anti-tamper feature
- 5 Auto-triggers
- Mirror / Normal switching from menu
- On screen distance and vertical line markers
- Audio
- Speed switch trigger to turn monitor on/off or trigger a split screen
- Sun shield
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 500cd/m²
- Viewing angles:
Side 65° x Top 50° x Bottom 60°

Power

- Power consumption: min 28 Watts
- Current: max 2.15 Amps

Durability & Standards

- Aluminium die-cast casing
- Mechanical vibration: 10G
- Mechanical shock: 100G
- Operating temperature: -40 to +75°C
- CE marked
- EMC approved: E
- ISO 16750
- ISO 20653: 2006
- HALT tested

ELITE MONITOR



BE-970WM - Waterproof 7" Digital LCD monitor

3351

- 12-24Vdc
- IP69K
- Size (WxHxD)
194 x 124 x 48mm
- 3 year warranty + optional 2 further years on registration



Features

- 2 Camera inputs
- Shutter camera compatible - both inputs
- Backlit touch screen button panel
- 'Button-lock' anti-tamper feature
- 2 Auto-triggers
- Mirror / Normal switching from menu
- On screen distance and vertical line markers
- Audio
- Sun shield
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 500cd/m²
- Viewing angles:
Side 65° x Top 50° x Bottom 60°

Power

- Power consumption: 11 Watts
- Current: 0.9 Amps

Durability & Standards

- Aluminium die-cast casing
- Mechanical vibration: 20G
- Mechanical shock: 100G
- Operating temperature: -40 to +70°C
- CE marked
- EMC approved: E
- ISO 16750
- ISO 13766: 2006
- HALT tested

Model

Part No:

ELITE MONITOR



BE-870LM - 7" Digital LCD monitor

2705

- 12-24Vdc
- **Size (WxHxD)**
197 x 128 x 34mm
- **3 year warranty + optional 2 further years on registration**



Features

- 2 Camera inputs
- Shutter camera compatible - both inputs
- 'Button-lock' anti tamper feature
- 2 Auto-triggers with configurable trigger-off delays
- Mirror / Normal switching from menu
- On-screen distance and vertical line markers
- Audio
- Sun shield
- Auto-dimmer and keypad illumination
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 400cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Power

- Power consumption: 12 Watts
- Current: 1 Amp

Durability & Standards

- Mechanical vibration: 2.5G
- Mechanical shock: 51G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E


ELITE MONITOR



BE-870FM - 7" Digital LCD monitor

2146

- 12-24Vdc
- **Size (WxHxD)**
197 x 135 x 30mm
- **3 year warranty + optional 2 further years on registration**



Features

- 4 camera inputs
- 5 Auto-triggers
- Shutter camera compatible
- 'Button-lock' anti-tamper feature
- Mirror / Normal switching from menu
- On-screen distance & vertical line markers
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching PAL / NTSC

Power

- Power consumption: 21 Watts
- Current: 1.9 Amps

Durability & Standards

- Mechanical vibration: 6G
- Mechanical shock: 100G
- Operating temperature: -40 to +70°C
- CE marked
- EMC approved: E
- HALT tested

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 400cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Monitor icons

- Number of camera inputs
- Number of auto-triggers
- Audio
- 'Button-lock' anti-tamper feature
- On-screen distance and vertical line markers
- Normal/mirror view - switching from menu

Model

Part No:

ELITE MONITOR



BE-865DDM - Double DIN 6.5" Digital LCD Monitor

3935

- 12-24Vdc
- IP69K
- Size (WxHxD)
188 x 116 x 142mm
- 3 year warranty + optional 2 further years on registration

6.5"

4 5 (Speaker icon) Lock icon

Image options icons: Dashed lines, Checkmark, Arrow

Plus additional in-built image options

Features

- 4 camera inputs with independent control
- Shutter camera compatible (all inputs)
- Backlit touch screen button panel
- 'Button-lock' anti-tamper feature
- 5 Auto-triggers
- Mirror / Normal switching from menu
- On screen distance and vertical line markers
- Audio
- Speed switch trigger to turn monitor on/off or trigger a split screen
- Sun shield
- Multi-lingual menus
- Audio / video inputs / output
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 500cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Power

- Power consumption: min 15.4 Watts
- Current: min 1.4 Amps

Durability & Standards

- Mechanical vibration: 6G
- Operating temperature: -40 to +70°C
- CE marked
- EMC approved: E
- ISO 16750

ELITE MONITOR



BE-856GM - 5.6" Digital LCD monitor

3756

- 12-24Vdc
- Size (WxHxD)
172 x 115 x 32mm
- 3 year warranty + optional 2 further years on registration

5.6"

2 3 (Speaker icon)

Image options icons: Dashed lines, Checkmark, Arrow

Features

- 2 camera inputs
- 2 Auto-triggers
- Mirror / Normal switching from menu
- On-screen distance & vertical line markers
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 640 x 480

- Contrast ratio: 500:1
- Brightness: 350cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Power

- Power consumption: 11 Watts
- Current: 0.9 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock: 50G
- Operating temperature: -40 to +70°C
- CE marked
- EMC approved: E
- ISO 13766: 2006
- ISO 16750
- HALT tested

Model

Part No:

SELECT MONITOR



VBV-7104FM - 10.4" Digital LCD Monitor

4474

- 12-24Vdc
- **Size (WxHxD)**
267 x 193 x 30mm
- 2 year warranty

10.4"



Plus additional in-built image options

Features

- 4 camera inputs
- 'Button-lock' anti-tamper feature
- 5 Auto-triggers
- Configurable trigger delay
- Mirror / Normal switching from menu
- On-screen distance markers
- Built-in speaker
- Sun shield
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 30,000 hours life)
- Anti-glare screen
- Resolution: 1024 x 768
- Contrast ratio: 500:1
- Brightness: 400cd/m²
- Viewing angles:
Side 70° x Top 60° x Bottom 60°

Power

- Power consumption: 31 Watts
- Current: 2.8 Amps

Durability & Standards

- Mechanical vibration: 4G
- Mechanical shock: 50G
- Operating temperature: -20 to +70°C
- CE marked
- EMC approved: E
- HALT tested

SELECT MONITOR



VBV-770FM - 7" Digital LCD monitor

4982

- 12-24Vdc
- **Size (WxHxD)**
182 x 122 x 27mm
- 2 year warranty

7.0"



Plus additional in-built image options

Features

- 4 camera inputs
- 'Button-lock' anti-tamper feature
- 5 Auto-triggers
- Mirror / Normal switching from menu
- On-screen distance markers
- Audio
- Sun shield
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 400cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Power

- Power consumption: 27 watts
- Current: 2.2 Amps

Durability & Standards

- Mechanical vibration: 4G
- Mechanical shock: 50G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E

Model

Part No:

SELECT MONITOR



VBV-770M - 7" Digital LCD monitor
VBV-770M-S - 7" Digital LCD monitor

4288
4697

Includes 1 x 5-pin input for connection to VBV-710C shutter camera

- 12-24Vdc
- Size (WxHxD)
196 x 118 x 26mm
- 2 year warranty



Features

- 3 camera inputs
- 3 Auto-triggers
- Mirror / Normal switching from menu
- 'Button lock' anti-tamper feature
- On-screen distance markers
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 400cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Power

- Power consumption: 18 Watts
- Current: 1.5 Amps

Durability & Standards

- Mechanical vibration: 4G
- Mechanical shock: 100G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E
- HALT tested

SELECT MONITOR



VBV-750M - 5" Digital LCD monitor
VBV-750M-S - 5" Digital LCD monitor

4287
4710

Includes 1 x 5-pin input for connection to VBV-710C shutter camera

- 12-24Vdc
- Size (WxHxD)
149.5 x 99 x 22mm
- 2 year warranty



Features

- 3 camera inputs
- 3 Auto-triggers
- Mirror / Normal switching from menu
- On-screen distance markers
- 'Button lock' anti-tamper feature
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 350cd/m²
- Viewing angles:
Side 70° x Top 50° x Bottom 70°

Power

- Power consumption: 11.5 Watts
- Current: 0.95 Amps

Durability & Standards

- Mechanical vibration: 4G
- Mechanical shock: 100G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E
- HALT tested

Model

Part No:

ESSENTIAL MONITOR



VBV-243M - 4.3" Digital Mirror monitor

5323

- 12-24Vdc
- Size (WxDxH)
280 x 92 x 30.5mm
- 1 year warranty



Features

- On screen multi-lingual display menu
- Digital LCD panel
- 2 Auto-trigger
- Auto dimmer
- Illuminated keypad
- On-screen distance markers
- TV system: PAL / NTSC

Picture Quality

- Resolution: 480 x 272
- Contrast ratio: 600:1
- Brightness: 1000cd/m²

- Viewing angles:
Side 65° x Top 60° x Bottom 50°

Power

- Power consumption: 6.6 Watts
- Current: 0.53 Amps

Durability & Standards

- Vibration rating: 6G
- Operating temperature: -20 to +70°C
- CE marked
- FCC approved

SMALL RIGID VEHICLES AND VANS SELECT RANGE CAMERA MONITOR SYSTEMS

VBV-770-310 - Single flush-mount camera monitor system for vans

4781



- VBV-770M - 7" monitor
- VBV-300C - flush-mount camera
- VBV-L410 - 10m cable

See individual products for detailed specifications

• 2 year system warranty

VBV-750-310 - Single flush-mount camera monitor system for vans

4780



- VBV-750M - 5" monitor
- VBV-300C - flush-mount camera
- VBV-L410 - 10m cable

See individual products for detailed specifications

• 2 year system warranty

RIGID VEHICLES ELITE RANGE CAMERA MONITOR SYSTEMS

BE-870L-000 - Single camera monitor system for rigid vehicles

3231



- BE-870LM - 7" monitor
- BE-800C - heated camera
- BE-L120 - 20m cable

See individual products for detailed specifications

• 3 year system warranty

Model

Part No:

BE-870L-100 - Single shutter camera monitor system for rigid vehicles

4032



- BE-870LM - 7" monitor
- BE-810C - heated shutter camera
- BE-L120 - 20m cable

See individual products for detailed specifications

• 3 year system warranty

BE-856G-000 - Single camera monitor system for rigid vehicles

4012



- BE-856GM - 5.6" monitor
- BE-800C - heated camera
- BE-L120 - 20m cable

See individual products for detailed specifications

• 3 year system warranty

**RIGID VEHICLES
SELECT RANGE CAMERA MONITOR SYSTEMS**

VBV-770-300 - Single flush-mount camera monitor system for rigid vehicles

4777



- VBV-770M - 7" monitor
- VBV-300C - flush-mount camera
- VBV-L420 - 20m cable

See individual products for detailed specifications

• 2 year system warranty

VBV-770-000 - Single camera monitor system for rigid vehicles

4692



- VBV-770M - 7" monitor
- VBV-700C - camera
- VBV-L420 - 20m cable

See individual products for detailed specifications

• 2 year system warranty

VBV-770-100 - Single shutter camera monitor system for rigid vehicles

4695



- VBV-770M-S - 7" monitor
- VBV-710C - shutter camera
- VBV-L520 - 20m cable

See individual products for detailed specifications

• 2 year system warranty

Backeye® Camera monitor systems - kits

Model

Part No:

VBV-750-300 - Single flush-mount camera monitor system for rigid vehicles

4776



- VBV-750M - 5" monitor
- VBV-300C - flush-mount camera
- VBV-L420 - 20m cable

See individual products for detailed specifications

• 2 year system warranty

VBV-750-000 - Single camera monitor system for rigid vehicles

4705



- VBV-750M - 5" monitor
- VBV-700C - camera
- VBV-L420 - 20m cable

See individual products for detailed specifications

• 2 year system warranty

VBV-750-100 - Single shutter camera monitor system for rigid vehicles

4708



- VBV-750M-S - 5" monitor
- VBV-710C - shutter camera
- VBV-L520 - 20m cable

See individual products for detailed specifications

• 2 year system warranty

RIGID VEHICLES ESSENTIAL RANGE CAMERA MONITOR SYSTEM

VBV-650-000 - Single camera monitor system for rigid vehicles

4765



- VBV-650M - 5" monitor
- VBV-620C - camera
- VBV-L420 - 20m cable
- 1 year warranty

Monitor

- 12-24Vdc
- 1 camera input
- Size (WxHxD)
148 x 110 x 30.2mm

Camera

- Viewing angle (HxVxD)
81 x 59 x 106°
- IP67
- Size (WxHxD)
64.5 x 59 x 55mm



Model

Part No:

**ARTICULATED VEHICLES
SELECT RANGE CAMERA MONITOR SYSTEMS**

VBV-770-001DW - Single wireless camera monitor system for articulated vehicles

4843



• VBV-770M - 7" monitor	4288
• VBV-700C - camera	1379
• VBV-L420 - 20m cable	1380
• DW-1000-TX - digital wireless transmitter	4043
• DW-1000-RX - digital wireless receiver	4044
• AC-006 - camera adapter	1983
• AC-007 - monitor adapter	1984

See individual products for detailed specifications
• 2 year system warranty

VBV-770-001 - Single camera monitor system for articulated vehicles

4767



• VBV-770M - 7" monitor	4288	• SC-07-24S - Coiled cable with type 24S 7-pin plugs	1227
• VBV-700C - camera	1379	• VBV-L420 - 20m extension cable for trailer	1380
• VBV-410 - 10m cable for cab	1386	• VSP-47B - 7-pin bulkhead socket for trailer & trailer-end camera connector	1846
• VSP-47A - 7-pin bulkhead socket for cab & cab-end camera connector	1847		

See individual products for detailed specifications
• 2 year system warranty

VBV-770-101 - Single shutter camera monitor system for articulated vehicles

4772



• VBV-770M-S - 7" monitor	4697	• VSP-57B 7-pin bulkhead socket for trailer & trailer-end camera connector	3870
• VBV-710C - shutter camera	1379	• SC-07-24S - Coiled cable with 7-pin sockets	1227
• VBV-L510 - 10m cable for cab	3663		
• VBV-L520 - 20m cable for trailer	3664		
• VSP-57A 7-pin bulkhead socket for cab & cab-end camera connector	3869		

See individual products for detailed specifications
• 2 year system warranty

Model

Part No:

ELITE TRUCK/TRAILER CABLE KIT


SK-31E - Cable kit for articulated trucks - unique pin layout

1830

Inclusive of SK-31E-T - Trailer only kit



SC-7



SP-7A



SP-7B

- BE-L110 - 10m cable for cab 0803
- SP-7A - 7-pin bulkhead socket for cab & cab-end camera connector (unique pin layout) 1827
- SC-7 - Coiled cable with 7-pin plugs (unique pin layout) 1829

SK-31E-T - Trailer only kit 1886

- BE-X020 - 20m extension cable for trailer 1143
- SP-7B - 7-pin bulkhead socket for trailer & trailer-end camera connector (unique pin layout) 1828

ELITE TRUCK/TRAILER CABLE KIT


SK-30E - Cable kit for articulated trucks

1144


Inclusive of SK-30E-T - Trailer only kit



SC-07



SP-07C



SP-07T

- BE-L110 - 10m cable for cab 0803
- SP-07C - 7-pin bulkhead socket for cab & cab-end camera connector 1140
- SC-07 - Coiled cable with 7-pin plugs 1046

SK-30E-T - Trailer only kit 1885

- BE-X020 - 20m extension cable for trailer 1143
- SP-07T - 7-pin bulkhead socket for trailer & trailer-end camera connector 1142

ELITE TRUCK/TRAILER CABLE KIT

SK-15-01 - Three camera cable kit for articulated trucks

3427



SP-15A-01



SP-15B-01



SC-15-01

- SP-15A-01 - 15-pin bulkhead socket for cab & 3 cab-end camera connectors 3423
- SP-15B-01 - 15-pin bulkhead socket for trailer & 3 trailer-end camera connectors 3422
- SC-15-01 - Coiled shielded cable with 15-pin plugs 3268

Model

Part No:

ELITE TRUCK/TRAILER CABLE KIT

SK-15-04 - Single camera & single buzzer Ultrasonic Detection System (new generation) cable kit for articulated trucks

3997



• **SP-15A-04 - 15-pin bulkhead socket for cab & cab-end camera connector plus stripped wires and display/buzzer connection for Ultrasonics** **3955**

• **SP-15B-04 - 15-pin bulkhead socket for trailer & trailer-end camera connector plus stripped wires and display/buzzer connection for Ultrasonics** **3956**

• **SC-15-01 - Coiled shielded cable with 15-pin plugs** **3268**



SP-15A-04



SP-15B-04



SC-15-01

ELITE TRUCK/DRAWBAR TRAILER CABLE KIT

SK-50E - Twin camera cable kit with unique pin layout for truck with drawbar trailer

1570

Inclusive of SK-50E-A Truck only kit and SK-31E-T trailer only kit



SK-50E-A - Truck only kit **1879**

SK-31E-T - Trailer only kit **1886**

• **BE-L115 - 15m cable for truck** **0802**

• **BE-X020 - 20m extension cable for trailer camera** **1143**


• **BE-X005 - 5m extension cable for truck camera** **2099**

• **SP-7B - 7-pin bulkhead socket for cab & cab-end camera connector (unique pin layout)** **1828**

• **CS-020 - Two way camera selector** **1571**

• **SP-7A - 7-pin bulkhead socket for trailer & trailer-end camera connector (unique pin layout)** **1827**


• **SC-7 - Coiled cable with 7-pin plugs (unique pin layout)** **1829**



SP-7A



SC-7



SP-7B

ELITE WIRELESS CONNECTION SYSTEM

DW-1000-TX - Digital Wireless Transmitter

4043

DW-1000-RX - Digital Wireless Receiver

4044



Transmitter



Receiver

- **Digital technology**
- **12-24Vdc**
- **1 camera input**
- **IP69K (Transmitter)**
- **Size (WxHxD)**
113 x 114 x 31mm
- **2 year warranty**

Features

- Image Latency: 200 milliseconds
- No need for retractable coiled cables
- Reduces installation time
- Re-pair facility allows for interchangeable trailers
- Triggered by reverse gear
- TV System PAL/NTSC
- Secure connection

Power

- Maximum Current Amps:
TX: 0.85 RX: 0.17

• **Power consumption:**

TX: 9.8 Watts RX: 2.2 Watts

Durability & Standards

- Operating temperature: -40 to +70°C
- Mechanical vibration: 6G
- Mechanical shock: 20G
- CE marked
- EMC approved: E

AC-006 & AC-007 adapter cables are required to connect to Select range camera and monitor

Truck and trailer connection

Model

Part No:

SELECT TRUCK/TRAILER CABLE KIT



VSK-31E - Cable kit for articulated trucks - unique pin layout

2539

Inclusive of VSK-31E-T - Trailer only kit



SC-7



SP-7A



SP-7B

- VBV-L410 - 10m cable for cab 1386
- SP-7A - 7-pin bulkhead socket for cab & cab-end camera connector (unique pin layout) 1827
- AC-014 - Adapter cable 2094
- SC-7 - Coiled cable with 7-pin plugs (unique pin layout) 1829

VSK-31E-T - Trailer only kit

2543

- VBV-L420 - 20m cable for trailer 1380
- AC-006 - Adapter cable 1983
- SP-7B - 7-pin bulkhead socket for trailer & trailer-end camera connector (unique pin layout) 1828


SELECT TRUCK/TRAILER CABLE KIT



VSK-30E - Cable kit for articulated trucks

2538

Inclusive of SK-30E-T - Trailer only kit



VSP-47A



VSP-47B



SC-07-24S

- VBV-L410 - 10m cable for cab 1386
- VSP-47A - 7-pin bulkhead socket for cab & cab-end camera connector 1847
- SC-07-24S - Coiled cable with type 24S 7-pin plugs 1227

VSK-30E-T - Trailer only kit

2542


- VBV-L420 - 20m extension cable for trailer 1380
- VSP-47B - 7-pin bulkhead socket for trailer & trailer-end camera connector 1846

SELECT TRUCK/TRAILER CABLE KIT



VSK-305E - Cable kit for articulated trucks - Shutter camera

3871



VSP-57A



SC-07-24S

- VBV-L510 10m cable for cab 3663
- VBV-L520 20m cable for trailer 3664
- VSP-57A 7-pin bulkhead socket for cab & cab-end camera connector 3869


- VSP-57B 7-pin bulkhead socket for trailer & trailer-end camera connector 3870
- SC-07-24S - Coiled cable with type 24S 7-pin plugs 1227

SELECT TRUCK/TRAILER CABLE KIT



SK-15-05 - 3-camera Backeye@360 cable kit for articulated vehicles

5066



SP-15A-05



SC-15-01

- SP-15A-05 - 15-pin bulkhead socket for cab & cab-end connector plus 3x connections for Backeye@360 Select 5066
- SP-15B-05 15-pin bulkhead socket for trailer & trailer-end connector plus 3x connections for Backeye@360 Select 5065

- SC-15-01 Coiled shielded cable with 15-pin plugs 3268

Model

Part No:

SELECT TRUCK/ DRAWBAR TRAILER CABLE KIT

VSK-50E - Twin camera cable kit for truck with drawbar trailer

2540

Inclusive of VSK-50E-A Truck only kit and VSK-30E-T Trailer only kit



VSK-50E-A - Truck only kit


2541

VSK-30E-T - Trailer only kit


2542

- VBV-L420 - 20m cable for truck 1380
- VBV-L405 - 5m camera cable for truck camera 1499
- VCS-020 - Two-way camera selector 1844
- 1 x VSP-47A - 7-pin camera bulkhead socket for truck rear 1847
- SC-07-24S - Coiled cable with 7-pin sockets 1227

- VBV-L420 - 20m cable for trailer 1380
- VSP-47B - 7-pin camera bulkhead socket for trailer 1846



VSP-47A



VSP-47B



SC-07-24S

SELECT TRUCK/DRAWBAR TRAILER CABLE KIT


VSK-505E - Twin shutter camera cable kit for truck with drawbar trailer

4005



- VBV-L420 - 20m cable for truck 1380
- VBV-L520 - 20m camera cable for truck camera 3664
- VBV-L505 - 5m camera cable for cab 4001
- VCS-020 - Two-way camera selector 1844
- 2 x AC-035 - 5-pin to 4-pin shutter camera adapter 3702

- VSP-57A 7-Pin bulkhead socket for cab & cab-end camera connector 3869
- VSP-57B 7-pin bulkhead socket for trailer & trailer-end camera connector 3870
- SC-07-24S - Coiled cable with 7-pin plugs 1227



VSP-57A



SC-07-24S

Model

Part No:

BRIGADE CAMERA MONITOR ADAPTERS

	 	AC-006 - Connects Select camera (not shutter) to Elite cable	1983
	 	AC-007 - Connects Select monitor to Elite cable	1984
	 	AC-014 - Connects Elite camera to Select cable	2094
	 	AC-014(5M) - Connects Elite camera to Select cable, 5m long	5049
	 	AC-020 - Connects Elite monitor to Select cable	2590
	 	AC-035 - 5-pin to 4-pin Select shutter camera adapter	3702
	 	AC-055(5M) - 5-pin to 4-pin Select cable, 5m long	4267
	  	AC-305 - Splitter cable connects 1 x BN360 camera to MDR & ECU	4903
	  	AC-306 - Splitter cable connects 1 x Select camera to MDR & monitor	4904
	  	AC-307 - Splitter cable connects 1 x Elite camera to MDR & Monitor	4905

MISCELLANEOUS CAMERA MONITOR ADAPTERS

	 	AC-056 - Connects Select camera to Orlaco monitor	4401
	 	AC-062 - Connects Elite camera to Orlaco monitor	4691
	 	AC-063 - Connects Elite camera to Orlaco monitor, screw fit	4925
	 	AC-066 - Connects Orlaco camera to Elite monitor	5027
	 	AC-067 - Connects Orlaco camera to Select monitor	5028
	 	AC-24-12(009) - In-line 24/12Vdc converter - Select camera to Mekra 507405 monitor	4926
	 	AC-308 - Splitter cable to connect MDR to Mekra 507405 CMS	4949

Model

Part No:

OEM CAMERA MONITOR ADAPTERS



	AC-041 - Connects Elite camera to John Deere 7-pin amp output	4245
	AC-042 - Connects Select camera to John Deere 7-pin amp output	4246
	AC-044 - Connects Elite camera to Molex M12 (Fendt)	4279
	AC-045 - Connects Select camera to Molex M12 (Fendt)	4280
	AC-068 - Connects Select camera to MAN Harman unit	5234
	AC-069 - Connects Select camera to MAN/Scania Harman unit without camera prep.	5318
	AC-24-12(002) - In-line 24/12Vdc converter - Elite camera to Daimler monitor	4266
	AC-24-12(004) - In-line 24/12Vdc converter - Select camera to MAN MMT HSD	4281
	AC-24-12(006) - In-line 24/12Vdc converter - Select camera to Volvo FH(4) & FM(4)	4719
	AC-24-12(007) - In-line 24/12Vdc converter - Select camera to Iveco connect system	4762
	AC-24-12(008) - In-line 24/12Vdc converter - Select camera to Mercedes sprinter	4763

A further range of OEM-specific adapters to connect Brigade cameras to factory-fit monitors is available

GENERAL CAMERA MONITOR ADAPTERS



	AC-016 - Connects AV to Camera input of Elite monitor	2150
	AC-019 - Connects Elite camera to male phono (video only)	2589
	AC-021 - Connects BNC/FLIR PathFindIR camera to Elite cable	2704
	AC-024 - Connects AV to Select monitor <small>(video & audio input, 12Vdc output)</small>	3183
	AC-028 - Connects AV to Select cable	3335
	AC-064 - Connects Elite camera to BNC adapter cable	4948

Model

Part No:

ELITE CAMERA CABLES



BE-L130	- 30 metre cable	0800
BE-L120	- 20 metre cable	0801
BE-L115	- 15 metre cable	0802
BE-L112	- 12 metre cable	3008
BE-L110	- 10 metre cable	0803
BE-L108	- 8 metre cable	3007
BE-L105	- 5 metre cable	0804
BE-L101	- 1 metre cable	5042
BE-L1003	- 0.3 metre cable	2797

ELITE CAMERA EXTENSION CABLES



BE-X025	- 25 metre extension cable	1907
BE-X020	- 20 metre extension cable	1143
BE-X015	- 15 metre extension cable	2101
BE-X010	- 10 metre extension cable	2100
BE-X005	- 5 metre extension cable	2099
BE-X003	- 3 metre extension cable	0805

SELECT CAMERA CABLES



VBV-L430	- 30 metre cable	2108
VBV-L420	- 20 metre cable	1380
VBV-L415	- 15 metre cable	3150
VBV-L412	- 12 metre cable	3106
VBV-L410	- 10 metre cable	1386
VBV-L407	- 7 metre cable	3151
VBV-L406	- 6 metre cable	3152
VBV-L405	- 5 metre cable	1499
VBV-L403	- 3 metre cable	4977
VBV-L4025	- 2.5 metre cable	1554
VBV-L520	- 20 metre 5-pin shutter camera cable	3664
VBV-L510	- 10 metre 5-pin shutter camera cable	3663
VBV-L505	- 5 metre 5-pin shutter camera cable	4001

Model

Part No:


CAMERA MONITOR SYSTEM ANCILLARIES



SS-002 - Twin camera screen splitter

3044

- 12-24Vdc
- 2 camera inputs
- Size (WxHxD)
147 x 37 x 78mm
- 2 year warranty



Features

- Offers split-screen option for monitors without in-built functionality
- 3 auto-triggers for each camera
- Shutter camera compatible
- TV System: PAL / NTSC
- Manual Mirror/Normal switching - choose from horizontal normal/mirror or vertical normal/flip
- Short circuit protection on camera inputs
- Reverse polarity protected
- Compatible with Brigade's camera monitors (adapters required for Elite)

Power

- Power Consumption: 8.4 Watts
- Current: 0.7 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock: 50G
- Operating temperature: -30 to +70°C
- CE marked
- EMC approved: E


CAMERA MONITOR SYSTEM ANCILLARIES



EDM-50 - Multi-camera module and screen splitter

2152

- 12-24Vdc
- 4 camera inputs
- Size (WxHxD)
154 x 28 x 105mm
- 2 year warranty

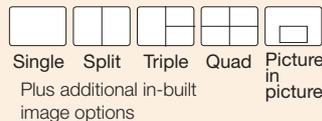

Features

- Shutter camera compatible (inputs 1,2&3)
- AV input to accept DVD, sat nav or other add-ons
- 5 manual or auto-triggers for each camera
- On screen distance markers
- Mirror / Normal image switch for each camera
- Selectable camera audio
- Auto-scanning function
- Compatible across Brigade camera monitor range (adapters required for Select series)

Power

- Power consumption: 20 Watts
- Current: 2A

Durability & Standards

- Mechanical vibration: 5G
- Operating temperature: -25 to +70°C
- CE marked
- EMC approved: E

CAMERA MONITOR SYSTEM ANCILLARIES



VCS-020 - Two-way camera switcher (Select range)

1844

- Allows a 2nd Select range camera to be connected to a Select range monitor

- 2nd camera view selected by trigger wire
- Full screen view only

CAMERA MONITOR SYSTEM ANCILLARIES



CS-020 - Two-way camera selector (Elite range)

1571

- Allows a 2nd Select range camera to be connected to a Select range monitor

- 2nd camera view selected by trigger wire
- Full screen view only

Model

Part No:

CAMERA MONITOR SYSTEM ANCILLARIES

LS-60-A - Speed switch

4851



- 12-24Vdc
- Auto-triggers safety equipment at the designated speed
- Size (WxHxD)
44 x 16 x 64mm
- 2 year warranty

Features

- Normally closed - safety device on by default, turning off at designated speed
- 10 speed threshold settings
- Compact size
- Easy to install and set up
- Short circuit protection on camera inputs
- Reverse polarity protected
- Compatible with Brigade products

Power

- Power consumption: 21.6 Watts
- Max current: 1.8 Amps
- Switch Output max. current: 1.2 Amps

Durability & Standards

- Mechanical vibration: 10G
- Mechanical shock: 50G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E

Note: A relay is required if connected to a device that is higher than 1.2 Amps

CAMERA MONITOR SYSTEM ANCILLARIES

SC-1000-ECU - Shutter camera module

3666



- Allows BE-810C shutter camera to function on non-shutter enabled inputs on Elite range monitors (using Elite range cables).

- Current: 2A
- CE marked
- EMC approved: E

Use AC-007 adapter to connect to Select monitor.


ELITE WIRELESS CONNECTION SYSTEM

DW-1000-TX - Digital Wireless Transmitter

4043

DW-1000-RX - Digital Wireless Receiver

4044



Transmitter



Receiver

- Digital technology
- 12-24Vdc
- 1 camera input
- IP69K (Transmitter)
- Size (WxHxD)
113 x 114 x 31mm
- 2 year warranty

Features

- Image Latency: 200 milliseconds
- No need for retractable coiled cables
- Reduces installation time
- Re-pair facility allows for interchangeable trailers
- Triggered by reverse gear
- TV System PAL/NTSC
- Secure connection

Power

- Maximum Current Amps:
TX: 0.85 RX: 0.17

- Power consumption:
TX: 9.8 Watts RX: 2.2 Watts

Durability & Standards

- Operating temperature:
-40 to +70°C
- Mechanical vibration: 6G
- Mechanical shock: 20G
- CE marked
- EMC approved: E

AC-006 & AC-007 adapter cables are required to connect to Select range camera and monitor

Mobile Digital Recording

By capturing footage from vehicle mounted cameras, mobile digital recorders provide an accurate witness, giving irrefutable evidence in the case of false claims, crash for cash incidents or vandalism. Disproving these claims means companies can make major cost savings, whilst importantly supporting their drivers, who are often the subject of increased scrutiny.

Which system is for you?

Brigade's **NEW** 500 series Mobile Digital Recorders include four-channel models with a 500Gb hard drive and eight channel, 1TB models. Both four and eight-channel vehicle recorders include models with WiFi and/or 4G connectivity capabilities*, allowing data to be accessed from the recorder without physically having to go to the recorder.

- Records from up to eight cameras simultaneously
- Built-in GPS for recording speed and location
- G-sensor provides impact, accelerating and braking data
- Wi-Fi and 4G connectivity capabilities
- Supports Analogue High Definition (AHD) cameras



WiFi & 4G

Brigade's new range of digital recorders include models with WiFi and/or 4G connectivity capabilities. Wirelessly connecting an MDR to a secure server can save many man-hours, as data can be obtained from the recorder without needing to access the vehicle.

***In order to set up and use the WiFi and/or 4G MDR models, IT infrastructure, services and dedicated hardware such as servers will be required.**

Model

Part No:

MOBILE DIGITAL RECORDER



MDR-508-1000	- 8 channel 1TB hard disk recorder	5126
MDR-508GW-1000	- 8 channel 1TB hard disk recorder with WiFi and 4G	5127
MDR-508G-1000	- 8 channel 1TB hard disk recorder with 4G	5128
MDR-508W-1000	- 8 channel 1TB hard disk recorder with WiFi	5129

- **9-32Vdc**
- **8 camera inputs - Supports ADH High definition cameras**
- **8 trigger/alarm inputs**
- **Lockable and interchangeable Hard Drive Unit - upgradeable to 2TB**
- **Fast, easily downloadable recordings and data**
- **Size (WxHxD) 224 x 85 x 221mm**
- **3 year warranty**

Main Contents

- Mobile Digital Recorder with 2.5" 1TB SATA HDD
- Wired Mouse
- Input / Output Cable
- Power Cable
- GPS Antenna
- 4G Antenna (G and GW models)
- Wi-Fi Antenna (W and GW models)
- USB A to B Cable (3.0)
- Security Key
- Bracket and Fixings

Features

- Remotely access MDR units using wireless (WiFi models only) and/or Mobile network (4G models only)
- Mobile apps for remote view (WiFi/4G models only)
- Geo-fencing (WiFi/4G models only)
- Mobile Standards: 2G/3G/4G
- Audio (cameras must have microphones)
- Robust aluminum housing
- Anti-vibration mounting allows for installation at any angle
- Built-in GPS
- Internal G-sensor and built-in buzzer
- Up to 1862 hours recording
- Recordings saved to hard disk (protected by non-visible digital watermark) and in-built Mirror recording onto SD card
- Recording modes: normal, alarm and timer (all watermarked)
- Configurable alarm trigger settings (speed, G-force, motion detection, video loss, voltage)
- Record images prior to alarm activation and after vehicle switched off

- MDR-Dashboard (full player) and MDR-Player (portable) with Google and MS Bing maps (English only)
- Search by date, time or triggered events
- Multi-level password protected access
- Hard drive unit directly pluggable to PC via USB port
- 8 x trigger Inputs, 2x trigger outputs and 1x12V power output
- Built-in HDD heater
- MDR Control using USB Mouse or IR remote control
- USB 3.0 connection
- TV System: PAL/NTSC/AHD
- Compatible with Brigade's vehicle CCTV camera monitor systems and Backeye@360 systems

Image and Audio Quality

- High quality H.264 image compression
- ADPCM - audio compression
- Choice of 8 low to high resolution settings
- Record at between 1 and 25 frames per second, per channel

Power

- Max power consumption: 80 Watts
- Current: 6.6 Amps

Durability & Standards

- Mechanical vibration: 1G
- Mechanical shock: 51G
- Operating temperature: -40 to +70°C
- EMC approved: E
- CE marked
- FCC approved
- IC approved
- RoHS2 Compliant

4G/Wi-Fi UPGRADES FOR MDR-508-1000

MDR-508GW-EXP-0	Wi-Fi & 4G Expansion Module for MDR-508-1000 SD card not included	5309
MDR-508G-EXP-0	4G Expansion Module for MDR-508-1000 SD card not included	5310
MDR-508W-EXP-0	Wi-Fi Expansion Module for MDR-508-1000 SD card not included	5311

Model

Part No:

MOBILE DIGITAL RECORDER



MDR-504-500	- 4 channel 500GB hard disk recorder	5122
MDR-504GW-500	- 4 channel 500GB hard disk recorder with WiFi and 4G	5123
MDR-504G-500	- 4 channel 500GB hard disk recorder with 4G	5124
MDR-504W-500	- 4 channel 500GB hard disk recorder with WiFi	5125

- **9-32Vdc**
- **4 camera inputs - Supports ADH High definition cameras**
- **8 trigger/alarm inputs**
- **Lockable and interchangeable Hard Drive Unit - upgradeable to 2TB**
- **Fast, easily downloadable recordings and data**
- **Size (WxHxD) 190 x 75 x 222mm**
- **3 year warranty**

Main Contents

- Mobile Digital Recorder with 2.5" 500GB SATA HDD
- Wired Mouse
- Input / Output Cable
- Power Cable
- GPS Antenna
- 4G Antenna (G and GW models)
- Wi-Fi Antenna (W and GW models)
- USB A to B Cable (3.0)
- Security Key
- Bracket and Fixings

Features

- Remotely access MDR units using wireless (WiFi models only) and/or Mobile network (4G models only)
- Mobile apps for remote view (WiFi/4G models only)
- Geo-fencing (WiFi/4G models only)
- Mobile Standards: 2G/3G/4G
- Audio (cameras must have microphones)
- Robust aluminum housing
- Anti-vibration mounting allows for installation at any angle
- Built-in GPS
- Internal G-sensor and built-in buzzer
- Up to 1862 hours recording
- Recordings saved to hard disk (protected by non-visible digital watermark) and in-built Mirror recording onto SD card
- Recording modes: normal, alarm and timer (all watermarked)
- Configurable alarm trigger settings (speed, G-force, motion detection, video loss, voltage)
- Record images prior to alarm activation and after vehicle switched off

- MDR-Dashboard (full player) and MDR-Player (portable) with Google and MS Bing maps (English only)
- Search by date, time or triggered events
- Multi-level password protected access
- Hard drive unit directly pluggable to PC via USB port
- 8 x trigger Inputs, 2x trigger outputs and 1x12V power output
- Built-in HDD heater
- MDR Control using USB Mouse or IR remote control
- USB 3.0 connection
- TV System: PAL/NTSC/AHD
- Compatible with Brigade's vehicle CCTV camera monitor systems and Backeye@360 systems

Image and Audio Quality

- High quality H.264 image compression
- ADPCM - audio compression
- Choice of 8 low to high resolution settings
- Record at between 1 and 25 frames per second, per channel

Power

- Max power consumption: 60 Watts
- Current: 5 Amps

Durability & Standards

- Mechanical vibration: 1G
- Mechanical shock: 51G
- Operating temperature: -40 to +70°C
- EMC approved: E
- CE marked
- FCC approved
- IC approved
- RoHS2 Compliant

500 SERIES MOBILE DIGITAL RECORDER ACCESSORIES



AC-306 Connects 1 x Select camera to MDR and monitor **4904**

AC-307 Connects 1 x Elite camera to MDR and monitor **4905**

MDR-RP01 Remote status & interface panel with panic button **4872**



MDR-06RPC 6m cable for Remote status & interface panel **4873**

MDR-GS-02 External G-sensor **4988**

MDR-03GSC 3m G-sensor cable **4874**

MDR-500-500-MCU Caddy unit with 500GB HDD **5132**

MDR-500-1000-MCU Caddy unit with 1TB HDD **5157**

MDR-500-2000-MCU Caddy unit with 2TB HDD **5330**

SD-32GB-IND 32GB industrial grade Class 10 SD card **4875**

SD-64GB-IND 64GB industrial grade Class 10 SD card **4876**



MDR-FPB32-01 External SD Mirror-recorder in fireproof housing with 32GB industrial grade Class 10 SD card **4896**

Model

Part No:

EVENT DATA RECORDER

EDR-101-008 - Event Data Recorder

4505



- **12-24Vdc**
- **1 in-built camera**
- **1 external camera input**
- **1 video output**
- **Fast, easily downloadable recordings and data**
- **Size (WxHxD)
85 x 49.5 x 25.5mm**
- **1 year warranty**

Contents:

- 1x Recorder
- 1x GPS Antenna
- 1x Power cable
- 1x Mounting Bracket & adhesive pad
- 1x 8Gb Micro SD card
- 1x Micro SD to SD adapter

Features

- High definition video capture for clear incident recording
- 112° wide-angle camera lens
- 4 recording modes:
 - Normal
 - Event - shock sensor enables 10 seconds before and after an event to be recorded
 - Parking - movement engages event recording as above
 - Emergency - driver presses the function button
- Up to 4 hours recording on supplied micro SD card (supports up to 32Gb)
- Simultaneous normal and event recording
- Continuous recording with automatic overwriting of oldest data

- Audio function for additional event information
- GPS module for locating tracking
- Viewing software allows two cameras to be viewed, alongside speed, G-force levels and location
- Software allows still images (jpeg) to be created with embedded date and time

Picture Quality

- CMOS sensor
- Video resolution: HD + VGA 1280 x 720 pixels
- MPEG4 image compression allows high quality image resolution
- Choice of recorded image quality – low to high resolution
- Fast frame rate, 30 frames per second, for smooth images

Durability & Standards

- Mechanical vibration: 2.5G
- Operating temperature: -10 to +60°C
- CE self DoFC

OPTIONAL EXTRAS



EDR-101-LOCK	SD card security lock	4517
EDR-142C	Micro camera (5m built-in cable)	4514
EDR-101-VC	Video out cable	4511
EDR-101-CPC	Cigar lighter power cable	4510

Ultrasonic Obstacle Detection

Sensor systems to inform driver of obstacles within close proximity, whether moving or stationary. Perfect for road going commercial vehicles regularly operating in confined spaces or manoeuvring at low speeds.

Which system is for you?

Sidescan® - 4 sensor system fitted to side of vehicle increasing safety when turning or low speed manoeuvring. Particularly relevant for near side blind spot where cyclists or pedestrians can otherwise go undetected.

Backscan® - 4 sensor system fitted to rear of vehicle as an invaluable aid to safe reversing. Gives greater protection to pedestrians and workers, whilst minimising damage to vehicle and other objects.

Cornerscan™ - 3 sensor system fitted to near side corner of vehicle cab detects objects in front near side blind spot. Minimises the risk of damage to the vehicle cab whilst manoeuvring at low speed.

Frontscan® - 4 sensor system fitted to front of vehicle improving safety when manoeuvring at low speed. Particularly relevant for front blind spot on high cabs where low objects or pedestrians can be hidden.

Stepscan™ - 2 sensor system fitted to near side cab step giving awareness to the driver of objects to the side when turning and reversing. Minimises the risk of damage to the vehicle cab from otherwise unseen objects.



Model

Part No:

BACKSCAN® ULTRASONIC DETECTION SYSTEM

BS-4000W - Rear reversing sensor system

3744



- 4 sensor system
- 12-24Vdc
- 2.5m detection range - outer sensors 2.5m/0.6m (selectable via dip switch)
- Graduated visual and audible distance warning display
- Underslung and flush-mount fixings included
- 50cm compensation range for sensors fitted inboard of vehicle rear (selectable via dip switch)
- 2 year warranty

Contents

- 4 x sensors
- Visual and audible display
- 4 x 0° flush mount fixings
- 4 x 11° flush mount fixings
- 4 x underslung fixings
- Waterproof control box
- 15m display cable
- 4 x 2.5m sensor cables

Features

- Obstacles detected in under 200 milliseconds
- Environment Learning Mode prevents false alarms from tow-hooks and other ancillary equipment that intrudes in the first 100cm of the detection zone
- Self-diagnostic function
- 1 x Trigger output

Durability & Standards

- Mechanical vibration: 5G
- Mechanical shock: 10G
- Operating temperature: -30 to +80°C
- Waterproof sensors to IP68
- Waterproof control box to IP69K
- CE marked
- EMC approved: E
- FCC approved

Power

- Power consumption: 2.4 Watts
- Current: 200mA

REQUIRED ADDITIONS FOR ARTICULATED VEHICLES

SK-15-04	Truck/trailer camera/sensor cable kit	3997
SK-UDS-05	Truck/trailer sensor only cable kit	4219
UDS-10BC	10m Buzzer/display cable	3716

OPTIONAL EXTRA

UDS-RELAY-24	Trigger-out diode protected relay 24Vdc	4215
UDS-RELAY-12	Trigger-out diode protected relay 12Vdc	4216

Model

Part No:

SIDESCAN® ULTRASONIC DETECTION SYSTEM

SS-4100W -	Side sensor system with mute function	5257
SS-4100W-000 -	Side sensor system with mute function, low speed trigger module and turn indicator sensor kit	5344

Includes LS-60-A low speed trigger module and TS-001ECU turn indicator sensor



- 4 sensor system
- 12-24Vdc
- 1.0/1.5m detection range - (selectable via dip switch)
- Audible distance warning
- Underslung and flush-mount fixings included
- 2 levels of sensitivity - (selectable via dip switch)
- 2 year warranty

Contents

- 4 x sensors
- Buzzer
- 4 x 0° flush mount fixings
- 4 x 11° flush mount fixings
- 4 x underslung fixings
- Waterproof control box
- 10m buzzer cable
- 4 x 4.5m sensor cables
- 2 x 2.5m extension cables

Features

- Obstacles detected in under 200 milliseconds
- Buzzer with audible distance warning, LED & adjustable volume control
- Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle

- Environment Learning Mode prevents false alarms from ancillary equipment that intrudes in the first 100cm of the detection zone
- Self-diagnostic function

Durability & Standards

- Mechanical vibration: 5G
- Mechanical shock: 10G
- Operating temperature: -30 to +80°C
- Waterproof sensors to IP68
- Waterproof control box to IP69K
- CE marked
- EMC approved: E
- FCC approved

Power

- Power consumption: 2.4 Watts
- Current: 200mA

ADDITIONS FOR ARTICULATED VEHICLES

SK-15-04	Truck/trailer camera/sensor cable kit	3997
SK-UDS-05	Truck/trailer sensor only cable kit (required)	4219
UDS-10BC	10m display cable (required)	3716
SS-4100W	Additional Sidescan sensor system for cab (optional)	5257

RECOMMENDED EXTRA

LS-60-A	Low speed trigger module <small>enables sensors below designated speed</small>	4851
TS-001ECU	Turn indicator trigger for system activation	1362

OPTIONAL EXTRA

SS-BC-08	Backchat speaking alarm with side turn warning for cyclists/pedestrians <small>Note: TS-001ECU Turn indicator trigger is required</small>	1334
TCO-47-01	Latched auto-reset Backalarm cut-out (dash mount)	4752



Ultrasonic obstacle detection

Model

Part No:

FRONTSCAN® ULTRASONIC DETECTION SYSTEM

FS-4000W - Front sensor system

3747



- 4 sensor system
- 12-24Vdc
- 2.0m/1.0m detection range - outer sensors can be reduced to 0.6m (selectable via dip switches)
- Audible distance warning
- Flush-mount
- 2 year warranty

Contents

- 4 x sensors
- Buzzer
- 4 x 11° flush mount fixings
- 4 x 18° flush mount fixings
- 4 x 26° flush mount fixings
- Waterproof control box
- 2.5m buzzer cable
- 4 x 2.5m sensor cables

Features

- Obstacles detected in under 200 milliseconds
- Environment Learning Mode prevents false alarms from tow-hooks and other ancillary equipment that intrudes in the first 100cm of

- the detection zone
- Self-diagnostic function
- 1 x Trigger output

Durability & Standards

- Operating temperature: -30 to +80°C
- Waterproof sensors to IP68
- Waterproof control box to IP69K
- CE marked
- EMC approved: E

Power

- Power consumption: 2.4 Watts
- Current: 200mA

RECOMMENDED EXTRA



LS-60-A

Low speed trigger module

(enables sensors below designated speed)

4851

OPTIONAL EXTRA

UDS-RELAY-24 Trigger-out diode protected relay 24Vdc

4215

UDS-RELAY-12 Trigger-out diode protected relay 12Vdc

4216

CORNERSCAN® ULTRASONIC DETECTION SYSTEM

CS-3100 - Corner sensor system with mute function

5261



- 3 sensor system
- 12-24Vdc
- 0.6/1.0m detection range - (selectable via dip switch)
- Audible distance warning
- Flush-mount
- 2 levels of sensitivity - (selectable via dip switch)
- 2 year warranty

Contents

- 3 x sensors
- Buzzer
- 3 x 11° flush mount fixings
- 3 x 18° flush mount fixings
- 3 x 26° flush mount fixings
- Waterproof control box
- 2.5m buzzer cable
- 3 x 2.5m sensor cables

Features

- Obstacles detected in under 200 milliseconds
- Buzzer with audible distance warning, LED & adjustable volume control
- Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle
- Environment Learning Mode prevents false alarms

- from ancillary equipment within the first 100cm of the detection zone
- Self-diagnostic function

Durability & Standards

- Mechanical vibration: 5G
- Mechanical shock: 10G
- Operating temperature: -30 to +80°C
- Waterproof sensors to IP68
- Waterproof control box to IP69K
- CE marked
- EMC approved: E
- FCC approved

Power

- Power consumption: 2.4 Watts
- Current: 2 Amps

RECOMMENDED EXTRA



LS-60-A

Low speed trigger module

(enables sensors below designated speed)

4851

Model

Part No:

STEPSCAN™ ULTRASONIC DETECTION SYSTEM

ST-2100 -	Step sensor system with mute function	5262
ST-2100-60-A -	Step sensor system with mute function and low speed trigger module	5345
	<small>Includes UDS-4.5SC 4.5m extension cable</small>	



- 2 sensor system
- 12-24Vdc
- 0.6/1.0m detection range - (selectable via dip switch)
- Audible distance warning
- Flush-mount
- 2 levels of sensitivity - (selectable via dip switch)
- 2 year warranty

Contents

- 2 x sensors
- Buzzer
- 2 x 11° flush mount fixings
- 2 x 18° flush mount fixings
- 2 x 26° flush mount fixings
- Waterproof control box
- 2.5m buzzer cable
- 2 x 2.5m sensor cables

Features

- Obstacles detected in under 200 milliseconds
- Buzzer with audible distance warning, LED & adjustable volume control
- Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle
- Environment Learning Mode prevents false alarms from

ancillary equipment that intrudes in the first 100cm of the detection zone

- Self-diagnostic function

Durability & Standards

- Mechanical vibration: 5G
- Mechanical shock: 10G
- Operating temperature: -30 to +80°C
- Waterproof sensors to IP68
- Waterproof control box to IP69K
- CE marked
- EMC approved: E
- FCC approved

Power

- Power consumption: 2.4 Watts
- Current: 200mA



RECOMMENDED EXTRA

LS-60-A	Low speed trigger module <small>enables sensors below designated speed</small>	4851
----------------	--	-------------

EXTENSION CABLES

UDS-2.5BC -	Buzzer/display extension cable 2.5m	3717
UDS-10BC -	Buzzer/display extension cable 10m	3716
UDS-15BC -	Buzzer/display extension cable 15m	3746
UDS-2.5SC -	Sensor extension cable 2.5m	3719
UDS-4.5SC -	Sensor extension cable 4.5m	3720

ULTRASONIC ON-SCREEN DISPLAY MODULE

UDS-OSD20-ECU - On-screen display module PAL

5099

UDS-OSD21-ECU - On-screen display module NTSC

5347



- Allows 3-stage audible and visual Ultrasonic data to be overlaid onto camera image on vehicle monitor

- 12-24Vdc
- 2 camera inputs
- 2 trigger inputs
- 2 UDS inputs
- 2 UDS outputs
- 2 year warranty

Contents

- OSD ECU
- Power cable
- Splitter cable
- Trigger cable

Features

- Overlay on monitor of vehicle icon and detection data from up to 2 x ultrasonic detection systems
- Compatible with 1x Sidescan® Frontscan® and Backscan®
- UDS overlay will appear on a black background if no cameras installed
- Graphics can be overlaid left or right on the monitor
- Audible warning via monitor
- Ultrasonic system fault displayed on monitor
- Compatible with MDR

Durability & Standards

- Mechanical vibration: 5G
- Mechanical shock: 10G
- Operating temperature: -30 to +70°C +22 to +158°F
- IP30
- Dimensions: 74 x 118 x 28 mm (WxDxH) 2.9 x 4.6 x 1.1"
- CE marked
- EMC approved: E
- FCC Approved
- IC Approved

Power

- Power consumption: 1.7 Watts
- Current: 140mA

Ultrasonic Detection On-Screen Display Module




- Integration of Brigade's ultrasonic obstacle detection systems and Backeye® camera monitor systems
- Ultrasonic detection warnings overlaid onto camera image on in-cab monitor
- Reduced driver stress and distractions as all information is in one view

Sensor data and camera image combined

Brigade's ultrasonic proximity sensors minimise both vehicle damage and collisions with pedestrians, cyclists or objects. Perfect for road-going commercial vehicles operating in confined spaces or manoeuvring at low speed.

Working in conjunction with a Backeye® camera monitor system and up to two ultrasonic detection systems, the on-screen display module warns the driver of obstacles close to the vehicle by overlaying 3-stage audible and visual ultrasonic data onto the camera image on the monitor.

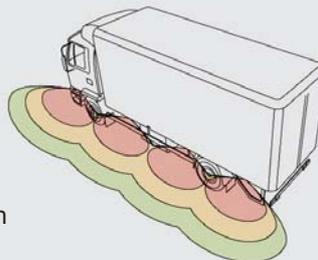

Radar Obstacle Detection

Informs driver of distance between vehicle and obstacles, whether moving or stationary.

Which model is for you?

Programmable

Top of the range programmable system allowing bespoke detection areas up to 30m in length and 10m in width, with the ability to calibrate out fixed objects or bodywork.



Fixed

Fixed detection length and width. Ideal on machines where no calibration is required. Detection range of up to 6 metres.



Model

Part No:

PROGRAMMABLE BACKSENSE® OBSTACLE DETECTION

BS-8000 - Programmable detection range

Sensor, AV display, 9m cable

4530



- 12-24Vdc
- **Detection length: 3 to 30m**
- **Detection width: 2 to 10m**
- **Rugged design for harsh environmental conditions**
- **Sensor size (WxHxD)**
217 x 129 x 50mm
- IP69K sensor
- **2 year warranty**

Features

- Frequency modulated continuous wave (FMCW) radar technology
- Effectively detects stationary, moving and multiple objects
- 1 activation input
- 1 trigger output
- Programmable:
 - Detection area
 - Blind zones - system ignores fixed objects
 - Trigger activation
 - Buzzer
- 5 stage audible and visual distance warning display
- Resistant to water, moisture, dust, vibration, heat, cold, mud and glare

Power

- Current: 0.8 Amps
- Power consumption: 8 Watts

Durability & Standards

- Mechanical shock: 100G
- Mechanical vibration: 8.3G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- BS EN 13309: 2010
- ISO13766: 2006

FIXED BACKSENSE® OBSTACLE DETECTION

BS-7030 - 3m detection range, 2.5m width

Sensor, AV display, 9m cable

4527

BS-7045 - 4.5m detection range, 3.5m width

Sensor, AV display, 9m cable

4528

BS-7060 - 6m detection range, 4.5m width

Sensor, AV display, 9m cable

4529



In-cab display

- 12-24Vdc
- **Maximum detection range of 6m**
- **Rugged design for harsh environmental conditions**
- **Sensor size (WxHxD)**
217 x 129 x 50mm
- IP69K sensor
- **2 year warranty**

Features

- Frequency modulated continuous wave (FMCW) radar technology
- Effectively detects stationary, moving and multiple objects
- 1 activation input
- 1 trigger output
- 5 stage audible and visual distance warning display
- Resistant to water, moisture, dust, vibration, heat, cold, mud and glare

Power

- Current: 0.8 Amps
- Power consumption: 8 Watts

Durability & Standards

- Mechanical shock: 100G
- Mechanical vibration: 8.3G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- BS EN 13309: 2010
- ISO13766: 2006

EXTENSION CABLES

BS-05DCX - 5m extension cable

4550

BS-09DCX - 9m extension cable

4551

BS-25DCSX - 25m extension cable (Display end connector supplied loose)

4975

OPTIONAL EXTRAS

BKT-017 - Adjustable radar bracket

with 105mm depth bracket mounting arms

4676

BKT-018 - Low-profile adjustable radar bracket

4758



NETWORK BACKSENSE® OBSTACLE DETECTION

BS-9000 - Backsense® CAN object detection radar

5266



- 12-24 Vdc
- **Detection length:**
up to 30m
- **Detection width:**
up to 10m
- **Sensor size (WxHxD)**
217 x 129 x 50mm
- **IP69K sensor**
- **2 year warranty**

Contents

- 1 x radar
- Fixings

Features

- Frequency modulated continuous wave (FMCW) radar technology
- Network up to 8 sensors
- Extremely rugged design for severe weather conditions and all terrains
- Communication via CAN Gateway
- Configurable CAN ID
- Complies with CAN2.0A Base Frame Format
- Separate CAN message & ID for each object detected (up to 8 closest objects per sensor)

Power

- Current: 0.4 Amps
- Power consumption; 4 Watts

Durability & Standards

- Mechanical shock: 100G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- BS EN 13309: 2010
- ISO13766: 2006

EXTENSION CABLES

BS-02DCX	- 2m extension cable	5272
BS-05DCX	- 5m extension cable	4550
BS-09DCX	- 9m extension cable	4551
BS-25DCSX	- 25m extension cable (Display end connector supplied loose)	4975

NETWORK ACCESSORIES

BS-00NYC	- Network Y Cable	5270
BS-02PIC	- Network power input cable	5271
BS-00NT	- 120 Ohms Network Terminator	5291



OPTIONAL EXTRAS

BKT-017	- Adjustable radar bracket with 105mm depth bracket mounting arms	4676
BKT-018	- Low-profile adjustable radar bracket	4758

Reversing & Warning Alarms

Reversing & Warning Alarms

Vital safety devices needed to warn workers and pedestrians that a vehicle is manoeuvring. Our range includes bbs-tek® white sound® alarms; smart alarms which adjust to the ambient noise level; and speaking alarms, which provide a real speech warning of imminent danger.

Which alarm is for you?

Heavy duty

For plant, quarry and construction machines or environments with high ambient noise.



Medium duty

Ideal for commercial road going vehicles and environments with mid-level ambient noise.



bbs-tek® white sound®

The safest alarms in the world due to their instant locatability and directional sound. The multi-frequency alarms are only heard in the danger zone, thus eliminating noise nuisance for local residents.



Model

Part No:

WHITE SOUND® SMART REVERSING ALARM



SA-BBS-107 - Self-adjusting heavy-duty - 87-107 Decibels

1400

- 12-24Vdc
- IP68
- Size (WxHxD)
172 x 79 x 95mm
- Lifetime warranty

Features

- Alarm continually adjusts to 5-10dB above ambient
- Multi-frequency broadband sound
- Instantly locatable
- Sound confined to danger area
- Eliminates noise nuisance
- Sounder unit: Driver
- Hole centres (mm): 153

Power

- Current: Max 1 Amp

Durability & standards

- Mechanical vibration: 10G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- SAE J994

WHITE SOUND® SMART REVERSING ALARM



SA-BBS-97 - Self adjusting - medium duty - 77-97 Decibels

1399

SA-BBS-97HV - Self adjusting - electric forklift - 77-97 Decibels

1398

- 12-24Vdc
- 36-80Vdc (HV)
- IP68
- Size (WxHxD)
127 x 76 x 65mm
- Lifetime warranty

Features

- Alarm continually adjusts to 5-10dB above ambient
- Multi-frequency white sound alarm
- Instantly locatable
- Sound confined to danger area
- Eliminates noise nuisance
- Sounder unit: Driver
- Hole centres (mm): 98-108

Power

- Current: Max 1 Amp

Durability & standards

- Mechanical vibration: 10G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- SAE J994
- NAS/PIEK approved for night-time delivery

WHITE SOUND® REVERSING ALARM



BBS-107 - Heavy duty - 107 Decibels

0899

BBS-102 - Heavy duty - 102 Decibels

0898

- 12-24Vdc
- IP68
- Size (WxHxD)
172 x 79 x 95mm
- Lifetime warranty

Features

- Multi-frequency broadband sound
- Instantly locatable
- Sound confined to danger area
- Eliminates noise nuisance
- Sounder unit: Driver
- Hole centres (mm): 153

Power

- Current: Max 1 Amps

Durability & standards

- Mechanical vibration: 10G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- SAE J994

Model

Part No:

WHITE SOUND® REVERSING ALARM



BBS-97 - Medium duty - 97 Decibels	0935
BBS-92 - Medium duty - 92 Decibels	0934
BBS-87 - Medium duty - 87 Decibels	0897
BBS-82 - Medium duty - 82 Decibels	0896

- 12-24Vdc
- IP68
- Size (WxHxD)
105x65x37mm (BBS-97/92)
105x65x32mm (BBS-87/82/77)
- Lifetime warranty

Features

- Multi-frequency broadband sound
- Instantly locatable
- Sound confined to danger area
- Eliminates noise nuisance
- Sounder unit: Speaker
- Hole centres (mm): 76

Durability & standards

- Mechanical vibration: 10G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- SAE J994
- NAS/PIEK approved for night-time delivery (BBS-82 & BBS-77 only)

Power

- Current: Max 0.5 Amps



WHITE SOUND® REVERSING ALARM



BBS-92HV - Electric forklift - 92 Decibels	1402
BBS-82HV - Electric forklift - 82 Decibels	1322
BBS-92ADR - Petrol tanker - 92 Decibels	2165

- 12-24Vdc
- 36-80Vdc (HV)
- IP68
- Size (WxHxD)
127 x 76 x 65mm
- Lifetime warranty

Features

- Multi-frequency broadband sound
- Instantly locatable
- Sound confined to danger area
- Eliminates noise nuisance
- Sounder unit: Speaker
- Hole centres (mm): 98-108

Power

- Current: Max 0.3 Amps

Durability & standards

- Mechanical vibration: 10G
- Operating temperature: -40 to +85°C
- CE marked
- EMC approved: E
- SAE J994



ADR version



alarms are covered by the following patents:

- AU2007200517
- EP1289798B2
- CN100488807C
- JP4798474B2
- NZ522190
- GB2345392C
- USRE44912

Model

Part No:

SPEAKING ALARM



BC-01HP - Single reversing message - 110 Decibels
BC-01HP(B) - Bespoke single message - 110 Decibels

0665
1199

- 12-24Vdc
- IP68
- Size (WxHxD)
116 x 115 x 117.5mm
- 2 year warranty

Features

- Real speech alarm
- * BC-01HP message "Ssh! Stand well clear, vehicle reversing..."
- Bespoke message up to 8 seconds, under 4 seconds for best speech quality
- Sounder unit: Speaker
- Hole centres (mm): 102

Power

- Current: 0.5 Amps

Durability & standards

- CE marked
- EMC approved: E

NIGHTSHIFT® SPEAKING ALARM



BC-01(NS) - Single reversing message - Nightshift - 90 or 0 Decibels
BC-01(NS-B) - Bespoke single message - Nightshift - 90 or 0 Decibels

0378
1198

- 12-24Vdc
- IP68
- Size (WxHxD)
122 x 84 x 50mm
- 2 year warranty

Features

- Real speech alarm
- * BC-01(NS) message "Ssh! Stand well clear, vehicle reversing..."
- Bespoke message up to 8 seconds, under 4 seconds for best speech quality
- Double engage reverse to cut-out or reduce sound
- Sounder unit: Speaker
- Hole centres (mm): 102

Power

- Current: 0.5 Amps

Durability & standards

- CE marked
- EMC approved: E

SPEAKING ALARM



BC-01 - Single reversing message - 90 Decibels
BC-01(B) - Bespoke single message - 90 Decibels
BC-02(B) - Bespoke dual message - 90 Decibels

0077
0079
0083

- 12-24Vdc
- IP68
- Size (WxHxD)
122 x 84 x 50mm
- 2 year warranty

Features

- Real speech alarm
- * BC-01 message "Ssh! Stand well clear, vehicle reversing..."
- Bespoke message up to 8 seconds, under 4 seconds for best speech quality
- Sounder unit: Speaker
- Hole centres (mm): 102

Power

- Current: 0.5 Amps

Durability & standards

- CE marked
- EMC approved: E

Model

Part No:

SPEAKING HANDBRAKE WARNING ALARM



2 wire version

BC-01(H/Brake) - Single message - 2 wire - 90 Decibels

0849

BC-01(4W)(H/Brake) - Single message 4 wire - 90 Decibels

1715

- 12-24Vdc
- IP68
- Size (WxHxD)
122 x 84 x 50mm
- 2 year warranty

Features

- Real speech alarm
- * Message "Bleep! Handbrake not applied..."
- Sounder unit: Speaker
- Hole centres (mm): 102

Power

- Current: 0.5 Amps

Durability & standards

- CE marked
- EMC approved: E

SPEAKING SIDE TURN WARNING ALARM



SS-BC-08 - Single side-turn message - 90 Decibels

1334

- 12-24Vdc
- IP68
- Size (WxHxD)
122 x 84 x 50mm
- 2 year warranty

Features

- Real speech alarm
- * Message "Ssh! Caution. Truck turning left..."
- Sounder unit: Speaker
- Hole centres (mm): 102

Power

- Current: 0.5 Amps

Durability & standards

- CE marked
- EMC approved: E

Note: TS-001ECU Turn indicator trigger is required 1362

SPEAKING ATTACK ALARM



BC-AA(BUS) - Single bus specific message - 110 Decibels

0064

BC-AA(B) - Single bespoke message - 110 Decibels

1465

- 12-24Vdc
- IP68
- Size (WxHxD)
116 x 115 x 117.5mm
- 2 year warranty

Features

- Real speech alarm
- BC-AA(BUS) message "This bus is under attack, please dial 999"
- Activated by panic button, repeats continuously until deactivated by hidden switch
- Sounder unit: Speaker
- Hole centres (mm): 48

Power

- Current: 0.5 Amps

Durability & standards

- CE marked
- EMC approved: E

Model

Part No:

VEHICLE INTERCOM



BC-VI - Normally open channel rear to cab; button press cab to rear
BC-VI-2 - Normally closed channel; button press communication

0815
0875

- 12-24Vdc
- IP68
- Size (WxHxD)
122 x 84 x 50mm
- 2 year warranty

Features

- Two-way communication system
- Master unit volume control: 80-95dB
- Includes master unit, slave unit and 25m cable
- Sounder unit: Speaker
- Hole centres (mm): 102

Power

- Current: 0.5 Amps

Durability & standards

- CE marked

ALARM ANCILLARIES



TCO-47 - Timed auto-reset Backalarm cut-out (dash mount)

0663

- 12-24Vdc
- 2 year warranty

Features

- Single touch timed relay
- Allows driver to cut-out alarm if reversing between the hours of 11.30pm-7.00am
- Auto-resets after 3-4 mins delay

Durability and Standards

- CE marked
- EMC approved

ALARM ANCILLARIES



TCO-47-01 - Latched Side-turn alarm cut-out (dash mount)

4752

- 12-24Vdc
- 2 year warranty


Features

- Single touch timed relay
- Allows driver to cut-out alarm between the hours of 11.30pm-7.00am
- Resets by switch or ignition

Durability and Standards

- CE marked
- EMC approved

ALARM ANCILLARIES

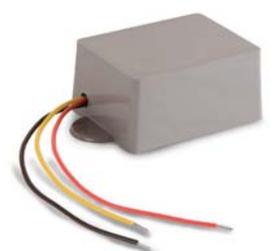

NS-2 - Nightshift Backalarm cut-out switch

0334

NS-3 - Nightshift Backalarm cut-out switch (auto gearbox)

0974

- 12-24Vdc
- IP68
- 2 year warranty

Features

- Double engage reverse to cut-out alarm
- Resets when reverse gear disengaged (longer time delay for NS-3)
- No wiring necessary to cab

Durability and Standards

- CE marked
- EMC approved

Peace of mind from Brigade

The quality of our product range is the cornerstone on which the continuing relationship with our customers is built. To reflect our confidence in the reliability of our products, some have a lifetime warranty. Many others have a 3 year warranty and the rest have a 2 or 1 year warranty. The following quick reference chart indicates the warranty available on Brigade products.



Lifetime Warranty (covers product for the life of vehicle)

bbs-tek® reversing alarms (all models featured in this catalogue)
Self-adjusting Backalarms (SA-range)



5 Year Warranty

Selected Elite camera monitor products are eligible for a free extended warranty of an additional two years, taking the total warranty to five years.

In order to take advantage of the additional two year warranty, each qualifying Elite CMS product will need to be registered on the Brigade website:

brigade-electronics.com/extendedwarranty

Offer excludes onsite warranty and is an extension of the standard three year warranty on selected Elite products.

Exclusions apply; see T&C for further details.



3 Year Warranty

Elite CMS range (all monitors and cameras with a BE prefix)
MDR digital recorders



2 Year Warranty

All products aside those specifically listed



1 Year Warranty

Essential camera monitor range
EDR digital recorder

Warranty Terms and Conditions

Brigade warrants all goods to be free from defect in material and workmanship in normal use provided that they have been installed and operated in accordance with the instructions supplied. The commencement date of all warranties is the date of delivery to the purchaser unless otherwise agreed in writing by Brigade. The period during which the warranty applies is stated above. Brigade make no other warranty, express or implied, with respect to the goods, their marketability, quality or fitness for any particular use or purpose. In particular, but without prejudice to the general provisions of the conditions of sale, no responsibility is assumed for incidental or consequential loss by reason of any warranty express or implied.

Full details of Brigade's Terms and Conditions are contained in the Price List.

Brigade Electronics Group Plc reserves the right to change terms, conditions and specifications shown in this catalogue at any time.

Glossary

Amp

Unit of electric current.

Approved for indirect vision

Product meets directives (e.g. 2003/97/EC, 2007/38/EU) or standards (e.g. Regulation 46) with regard to its use on vehicles for indirect vision e.g. giving visibility in otherwise blind spots.

Auto-trigger

Enables automatic triggering of an action i.e. display of rear camera view when reverse gear engaged.

A/V input/output

Communication connection between electronic devices.

Input

Receives audio/visual signals such as from DVD or satellite navigation.

Output

Sends audio/visual signals to other devices such as to mobile digital recorder.

Brightness

Brightness of the picture displayed on a monitor, measured in candelas per square metre (cd/m²). Higher the measure the brighter the picture.

CCD (Charged-Coupled Device)

A tiny photocell used in cameras to convert light into a digital signal.

Contrast

Light intensity ratio of a display device between darkest and lightest colour produced.

CE mark

Confirmation that a product is in conformity with the essential requirements of any applicable directives e.g. 2004/108/EC (relating to Electromagnetic Compatibility).

Decibel (dB)

Unit of measure of the pressure (intensity) of sound. The higher the rating the more intense the sound.

EMC (Electro-magnetic compatibility)

A test to determine the unwanted effects of electromagnetic interference.

E

Complies to United Nations Commission for Europe (UN ECE) standards e.g. ECE 10.03

e

Complies to Council of the European Union standards e.g. 2006/28/EC, 2009/19/EC

FCC mark

Certification for electromagnetic interference on products manufactured or sold in the United States which comply with the Federal Communications Commission.

Frequency

Number of times a sound source vibrates per unit of time, measured in hertz (Hz). The higher the rating the higher the pitch.

GPS (Global Positioning System)

Global satellite system providing positioning and timing services to worldwide users on a continuous basis.

HALT (Highly Accelerated Life Test)

A comprehensive stress test applied to electronic equipment to identify design weakness.

IC (Industry Canada)

Certification for electromagnetic interference on products manufactured or sold in Canada which comply with the Bureau of Innovation, Science & Economic Development

Illumination distance (camera)

Distance a camera with infrared LEDs can see in ultra-low light conditions, measured in metres.

IP## (Ingress Protection)

An international classification for the sealing of electrical equipment against the intrusion of solid objects (digit 1) and liquids (digit 2). Higher the rating the better protection in each case.

ISO 13766:2006

Specific standard for earthmoving equipment, includes requirements for some additional tests that are not covered in the tests for 'E' or 'e' under EMC.

ISO 15008:2003

Standard relating to the specifications and compliance procedures for in-vehicle visual presentation i.e. in relation to monitors.

ISO 16750

Standard providing guidance regarding environmental conditions commonly encountered by electrical and electronic systems installed in vehicles.

LCD (Liquid Crystal Display)

Thin, flat display device made up of any number of colour or monochrome pixels i.e. monitor screen.

LED (Light Emitting Diode (camera))

Emits infrared light for high efficiency and performance in ultra-low light.

LED (Light Emitting Diode (monitor))

Used to backlight the monitor display for crisp images and superior image quality.

Mechanical shock

Level of sudden acceleration or deceleration, such as impact or being dropped, to which product will still perform. Measured in gravitational force (G).

Mechanical vibration

Level of continuous or repetitive motion, such as engine vibration, to which product will still perform. Measured in gravitational force (G).

NAS-PIEK

The standard for quiet delivery vehicles in the UK, certified by the Noise Abatement Society.

NTSC (National Television Systems Committee)

TV colour encoding standard.

PAL (Phase Alternating Line)

TV colour encoding standard.

Resolution (RGB)

Number of pixels used to display an image. Measured in Width x 3 channels (Red, Green, Blue) x Height.

SAE J994

Performance testing for electrically operated reversing alarms primarily intended for use on off-road, self-propelled construction and industrial machines.

SD Card

Small portable memory card to store digital data.

Sounder unit

Unit which produces the sound of an alarm.

TV Lines

Number of horizontal lines used to create an image.

USB port

Communication connection between electronic devices i.e. to download data from mobile digital recorder.

Viewing angles (camera)

The maximum angle of vision.

Viewing angles (monitor)

The maximum angle at which an image can be successfully viewed. Measured from the centre point on the monitor.

Watt

A measure of the electrical power needed to drive a product.

WiFi

A facility allowing devices to communicate wirelessly. A wireless network creates a small, localised area within which your devices can receive signal.

4G

A cellular data service available from mobile network providers.


Driving Global Safety

Brigade is committed to making roads and worksites safer for all. From our humble beginnings in the UK, we now have a network of overseas subsidiaries, joint venture companies and partnerships with over 80 approved international distributors, all chosen for their high level of service and expertise in vehicle safety.

Whether you operate an international, multi-vehicle fleet or a small business in a remote corner of the globe, Brigade has a local specialist to help with your safety requirements.

We can provide a solution for a specific problem or offer friendly advice and support if you are new to vehicle safety systems.

Wherever you are in the world, large road-going vehicles and mobile plant continue to be a danger. Thankfully, Health & Safety culture is gradually improving to help combat these dangers, but whatever the local obligation, there is no excuse for compromising on safety. Stay safe, fit Brigade.

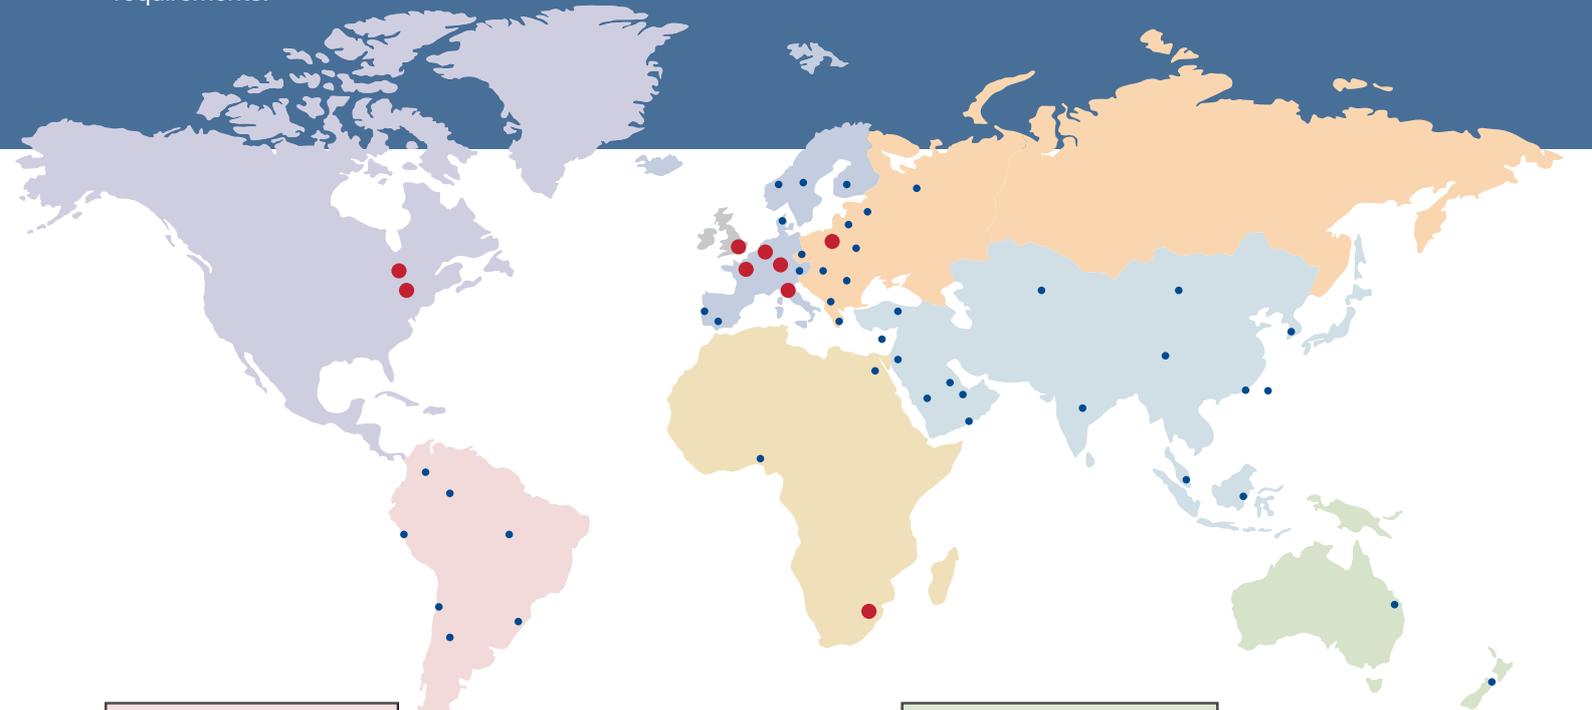

South America

- National Distributors in Brazil, Chile, Argentina, Peru, Bolivia, Colombia

Australasia

- National Distributors in Australia, New Zealand

North America

- Subsidiaries in USA and Canada
- National Distributors in Mexico.

West Europe

- Subsidiaries in Germany, Italy, France and Benelux
- National Distributors in Austria, Denmark, Finland, Norway, Portugal, Spain, Sweden

East Europe

- Subsidiary in Poland
- National Distributors in Bulgaria, Czech Republic, Greece, Hungary, Baltic States, Romania, Russia, Serbia, Slovenia, Turkey, Kazakhstan

Asia

- National Distributors in India, Pakistan, Mongolia, Hong Kong/China, Indonesia

Africa

- Joint venture company in South Africa that also covers Congo, Zimbabwe, Angola and Zambia
- National Distributors in Egypt, UAE, Oman, Israel

United Kingdom

- Brigade Electronics Group Plc
- Subsidiary in UK
- Brigade Service Partners: These are experienced, accredited technicians who provide service and support for anyone who has purchased our products. Operating from over 20 regional sites nationwide, each with fully equipped workshops and a team of engineers providing extensive parts availability, support and advice.
- Nationwide network of approved fitters, mobile engineers and over 150 distributors

Brigade Group

Brigade Electronics Group Plc

Brigade House, The Mills
Station Road, South Darent
DA4 9BD. United Kingdom
Tel: +44 (0)1322 420300
Email: exportsales@brigade-electronics.com
www.brigade-electronics.com

Brigade Electronics (UK) Ltd

Brigade House, The Mills
Station Road, South Darent
DA4 9BD. United Kingdom
Tel: +44 (0)1322 420300
Email: sales@brigade-electronics.com
www.brigade-electronics.com

Brigade Elektronik GmbH

Havelstraße 21
24539 Neumünster. Germany
Tel: +49 (0) 4321 555 360
Email: info@brigadegmbh.de
www.brigade-elektronik.de

Brigade Elettronica srl

Corso Trapani, 16
10139 Torino. Italy
Tel: +39 011-0142105
Email: info-italia@brigade-electronics.com
www.brigade-elettronica.it

Brigade Electronics BV

Hinmanweg 9A
7575 BE Oldenzaal. The Netherlands
Tel: +31 541 53 18 01
Email: info@brigade-electronics.nl
www.brigade-electronics.nl

Brigade Electronics FRANCE SAS

Siège social 92 avenue Robert Buron
53000 Laval France
Tel : 02 99 03 60 34
Email: info@brigade-electronics.fr
www.brigade-electronics.fr

Brigade Electronics Inc

215 E Pearl St.
Portland, IN 47371
USA
Tel: +1 (260) 766-4343
Email: sales@brigade-inc.com
www.brigade-inc.com

Brigade Elektronika (Pty) Ltd

P.O. Box 17490
Lyttelton 0140. South Africa
Tel: +27 12 6440137
Email: sales@brigade-sa.co.za
www.brigade-electronics.com

Brigade Electronics (Canada) Limited

c/o Fluke, 450 Sherman Ave N
Hamilton, ON L8L 8J6. Canada
Tel: +1 (604) 245 1752
Email: contact@brigade-electronics.ca
www.brigade-electronics.ca

Brigade Electronics (Polska) sp. z o.o.

ul. Olszewskiego 6,
25-663 Kielce. Poland
Tel: +48 887 480 950
Email: info@brigade.com.pl
www.brigade.com.pl

Spain

brigade-electronics.es

