




Tensile Load Links

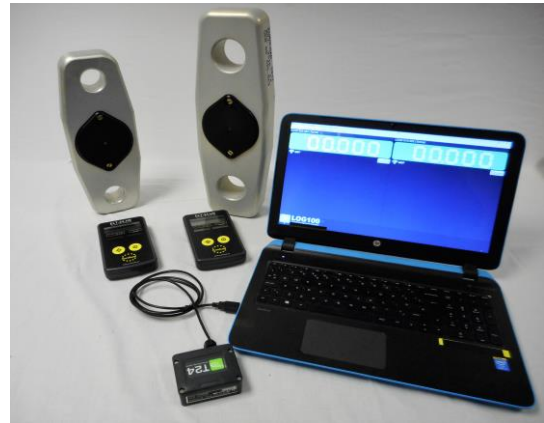

Euroload supply a range of tensile load links. These can be cabled or telemetry. 98% of the links we sell are the telemetry version. We use the highest spec aerospace grade aluminum, high factor of safety, ergonomic design to reduce personnel injury, light weight, long battery life.

Applications for the use of tensile load links are anywhere a true tensile force requires monitoring. Application include, ship loading and unloading, padeye/ structure testing prior to MPI, towing, rigging, stage rigging, overhead cranes, underhook verification on any crane, load testing of cranes and structures.

The telemetry version of our load links comes with numerous modules to datalog, provide emergency shut down (relay), gateways, large digit displays and many more.

The load links are designed to fit only the correct shackle to suit the safe working load. 6.5 tonne link will only fit 6.5 tonne shackle to reduce incorrect use. Load links are available to suit most size of shackles from 6.5 tonne to 1000 tonne.