PRODUCT CATALOGUE





A LITTLE BIT ABOUT US

Based in South Gloucestershire, Taylor Attachments are a family run business specialising in manufacturing a wide range of tractor and handler headstock conversion brackets alongside our expanding range of loader attachments. These are manufactured in-house and sold internationally to the commercial, industrial and agricultural markets.


Our products are built to a very high standard and are independently tested to ensure they are more than capable of delivering their required expectations. The majority of our headstocks are manufactured using very highly accurate laser cutting technology to ensure a perfect fit to your existing attachments giving you peace of mind from the point of order through to the daily use of the product.

Visit our website and our Facebook page to keep up-to-date with all our latest product launches or get in contact with us.

Taylor Attachments Grange Farm Latteridge Iron Acton Bristol BS37 9TP

01454 537338

sales@taylorattachments.co.uk accounts@taylorattachments.co.uk

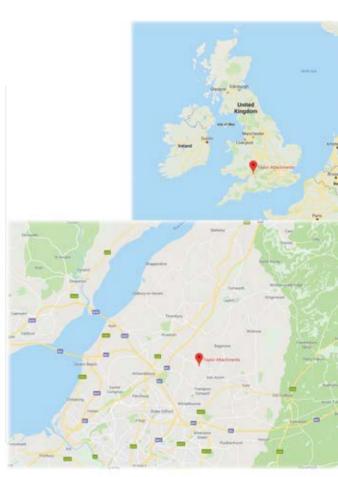



TAYLOR - ATTACHMENTS.

CONTENTS

PAGE		PAGE	
4 & 5	Three Point Linkage Headstocks	17	Slew and Linkage Headstocks
6	Hooklifter	18	Ball Hitch Towing Frames
7	Eurolifter	19	HD Towing Hitch & Combine
8	Big Bag Lifters	19	Header Moving Frames
9	Floating Fork Carriages	20	Lifting Jibs
10	Pallet Fork Carriages	21	Bale Spikes
11	Hydraulic Fork Positioners	22-23	Adapter Plates
12	RORO Skip Hooks	24	Man Cages
13	Floating Scraper Headstocks	25	Testimonials
14-15	Replacement Handler Headstocks	26	Gallery
16	Replacement Loader Headstocks	27	Notes

THREE POINT LINKAGE HEADSTOCK



Converts your tractor and loader or telehandler to pick up and use attachments on 3 Point Linkage.

Our best-selling product, fully designed and manufactured by Taylor Attachments to act as a true 3 Point Linkage on the front of your loader.

This product can be used for a wide variety of jobs including machinery moving / loading, implement maintenance and repairs, and full use of implements (post knockers, buck rakes, snow ploughs and many more).

Expertly designed to be as compact as possible while providing a fully adjustable 3 Point Linkage.

Lower link arms are easily adjustable to fit exactly where you want them and can be locked in place in seconds allowing a rapid coupling to your implement.

Comes complete with adjustable top link.

Available with CAT 2 or CAT 3 lower link arms.

CE Marked and tested to a Safe Working Load (SWL) of up to 6000 kgs (6 Tonnes).


Can be fitted with any loader brackets.



Optional Extras-

Hooklifter Kit

Turn your Three Point Linkage Headstock into one of our Hooklifters using our Hooklifter Kit.



Rubber Pads

For protecting the paintwork on new machinery when moving. Widely used by dealers.



Removable Towing Clevis

For easy moving of trailed equipment. We offer a unique hitch which functions in either a fixed or floating position for ease of use, and fully removable with just one pin.



With our new extended design you can achieve a near 90 degree turn.

K80 Ball Hitch

Becoming increasingly popular our new fully removable K80 ball hitch is invaluable for moving larger trailed equipment around.



HOOKLIFTER



No more straps and slings – Work safely and quicker with the Hooklifter

Fully designed and manufactured by Taylor Attachments to easily move, carry and load 3 point linkage implements without leaving the cab!

This product can be used for a wide variety of jobs including machinery moving, loading, maintenance and repairs, for Farmers, Dealers and Manufacturers.


Expertly designed to be as compact as possible while providing sufficient clearance of PTO shafts.

The pads are easily adjustable to fit exactly where you want them and can be locked in place in seconds.

CE Marked and tested to a Safe Working Load (SWL) of 5000 kgs (5 Tonnes).

Can be fitted with any loader brackets.



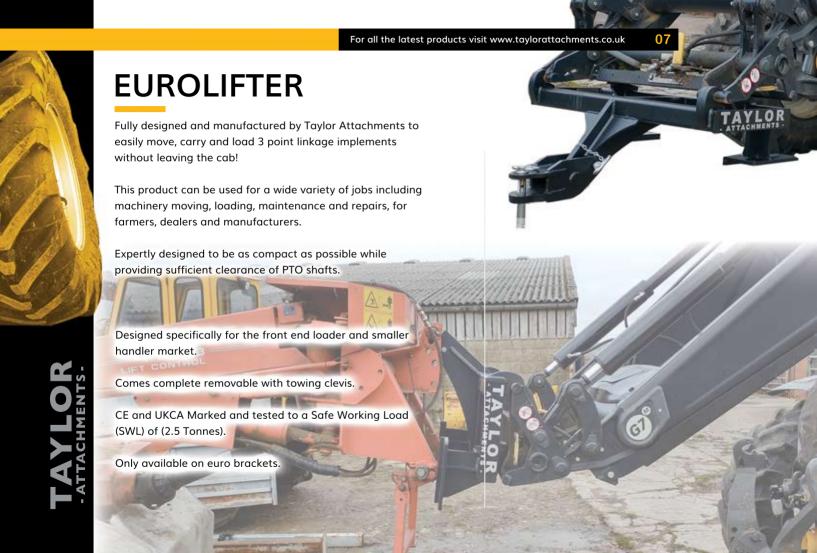

TAYLOR - ATTACHMENTS.

BIG BAG LIFTER



- 1

Easily slide and lock the arms in place for different size bags.

Significantly reduces the height needed to lift bags to unload from larries and stack in sheds.

1170mm arm centres at full width, and 1400mm long arms.

CE Marked and tested to a Safe Working Load (SWL) of 2500 kgs (2.5 Tonnes).

Can be fitted with any loader brackets.

A fully adjustable Big Bag Lifter designed to carry seed, fertiliser, sand, gravel and pretty much anything in a big bag!

These extra strong arms are designed to carry up to 4x 600KG bags, and can be adjusted with ease to cater for different sizes.



FLOATING FORK CARRIAGE



No more getting in and out of the cab to put the pallet forks on and off!

Simply leave your JCB pallet forks on this frame and hitch them on using the Qfit brackets on the back, as you would with a bucket etc.

This frame uses your existing JCB pallet forks and bar.

We can supply these frames with a range of different brackets and can also supply them as a full set up to include the bar and forks.

Floating design to imitate how your forks work when mounted on the JCB headstock, allowing easy moving of pallets on uneven ground.

- Mounting bracket fitted on top rail for folding forks up while travelling on roads.
- Options of 50mm and 57mm bar types to match your machine.
- CE Marked and tested to a Safe Working Load (SWL) of 4000 kg to 6000 kg depending on model required.





PALLET FORK CARRIAGES



Pallet forks for tractor loaders, forklifts and telehandlers.

Available in class 2 and class 3.

CE Marked.

Can be fitted with any brackets.

Class 2 - 2500kg SWL

Class 3 - 4500Kg SWL

6 tonne version also available on request.

Carriages can be supplied with or without forks.

Forks are also available separately at competitive prices.



Perfect for moving shipping containers.

Available in different widths to accommodate any requirments.

MERLO FORK CARRIAGES

Simply leave your Merlo pallet forks on this frame and hitch them on using the standard quick hitch.





HYDRAULIC FORK POSITIONER

Width adjustable forks simultaneously position themselves under control from the machines hydraulic service whilst still retaining the floating fork feature.

The forks are still able to be folded up and secured for safety when transported on public roads.

Standard specifications-

- 4.5t safe working load.
- 1200mm long tines.
- Width adjustable forks from 260mm 1200mm (outsides).
- Choice of handler or loader brackets.
- Supplied with fork retaining brackets for road use.

Options-

- Removable backrest (various heights available).
- Up to 2400mm long forks.
- Carriage can be offered at wider width for bespoke applications.
- Greater lifting capacities



All offered with the high standard of build quality, design and service you can expect from Taylor Attachments.



BIG SKIP HOOK





Commonly used in green waste and recycling industries for a speedy and safe way of moving empty 'roll on-roll off' skips. We've been told these save huge amounts of time and costs compared to using the lorries to manoeuvre the skips.

Features an elongated hook to allow turning of the skip without pinching or causing damage to either the skip or the frame.

Only to be used to manouver empty skips.

Your choice of handler brackets.

Excellent forward visability.



FLOATING YARD SCRAPER HEADSTOCK



A very popular product fully designed and manufactured by Taylor Attachments to use your existing yard scraper on the front of your loader or handler.

A very affordable way to use standard rear mounted yard scrapers on the front of your loader or handler.

Watch videos of this in action on our websitewww.taylorattachments.co.uk



Expertly designed to float when in use to reduce rubber wear on your scraper.

Excellent forward visibilty when scraping.

Minimal loader movements required when scraping - no precise lowering needed, the floating system takes care of this.

Fully width adjustable for Category 1 and 2 yard scrapers.


Can be fitted with any loader / handler brackets

REPLACEMENT HANDLER HEADSTOCKS

We are now able to offer complete replacement headstocks for all makes and models of handlers.

We use the latest state of the art 3D scanning technology to scan and replicate existing fitment patterns of headstocks to create our own perfectly fitting replacements using our proven tested designs to seamlessly integrate with your machine.

Whether its to replace worn out headstocks, change headstock type when you buy a second hand machine, or commonly fitted to new machines by dealers.

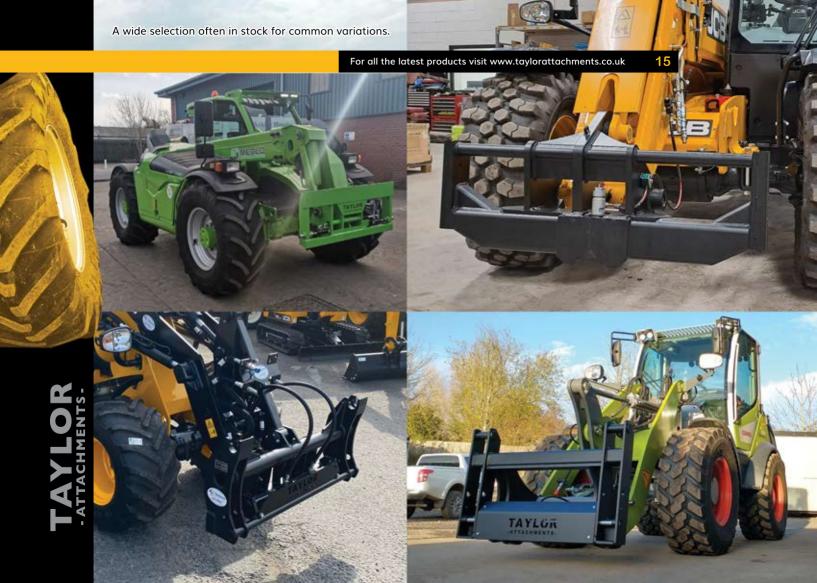



SLEW HEADSTOCKS LINKAGE MOUNTED

Fit an agricultural or industrial headstock to your 360 digger for a wide range of uses.

We can fit any size slew brackets to any of our headstocks with either manual or hydraulic locking options.



Our range are our headstocks mounted on your three point linkage. We find these are commonly used on the front linkage of tractors especially when a hydraulic top link is used.





HEAVY DUTY BALL HITCH TOWING FRAMES

A heavy duty frame fited with a 50mm ball and jaw, ideal for a safe and easy way to manoeuvre trailers and caravans.

Commonly sold to a public sector organisation for the safe moving of trailers and bowsers around sites.


Great forward visibility and offering over 90 degree turns.

Available on your choice of handler or loader brackets.

HEAVY DUTY TOWING HITCH those balers away in winter!

Designed to meet the need to move increasingly larger equipment on and off lorries, around yards and workshops and for tucking

100mm deep clevis 32mm drawbar pin included 90mm clearance from centre of pin Over a 90 degree turn achievable Available with any choice of handler brackets

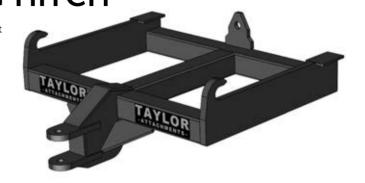

COMBINE HEADER LIFTING FRAME



Supplied with bolt on brackets to suit all handlers.

With strength and visibility at the forefront of the criteria required, we designed and manufactured the below carrier enabling this attachment to be able to move the following headers-

Case New Holland MacDon John Deere R Series



LIFTING JIB

AYLOR

Heavy duty lifting jibs available on your choice of handler brackets

Up to 6t SWL @ 1500mm and 3t SWL @ 2000mm

Strong and robust design.

Comes complete with certificate of conformity.



TAYLOR
- ATTACHMENTS-



BALE SPIKES

A range of Twin, Triple and Quadruple bale spikes to cover a wide range of uses. Heavy duty construction featuring 8mm wall box section and your choice of brackets.

Model - BSTR - Triple Bale Spike

- Conus 2 KV heavy duty spikes
- 820mm or 980mm long tines
- 550mm tine centres
- 1250mm to 2100mm height adjustable backrest

Model - BSQU - Quadruple Bale Spike

Conus 2 KV heavy duty spikes

- 980mm and 820mm long tines
- 1100mm tine centres
- 1250mm to 2100mm height adjustable backrest (optional)

Model - BSTW - Twin Bale Spike

- Conus 2 KV heavy duty spikes
- 820mm or 980mm long tines
- 750mm tine centres



HEADSTOCK ADAPTER PLATES



We specialise in loader and telehandler headstock adapters. As one of the market leaders in these products, you can be assured that when you order an adapter from us, you'll receive a product that won't let you down.

Why choose an adapter from us?

We design and manufacture all of our adapter plates in-house here in the UK.

Our adapter plates are designed to be as compact as possible to reduce the amount of forward leverage on your loader, minimising any reductions in lifting capacities.

Where possible we ensure the geometry of our adapter plates match as best as possible to the combination you require, keeping your tipping and crowd angles as they should be.

We have the largest stock of adapter plates on the shelf in the UK, stocking over 70 common adapter plates ready for next day delivery

We can offer both manual, or hydraulic locking adapters at very competitive prices.

All of our adapter plates are load tested well in excess of their required limits to ensure they can withstand the modern workload expected of them.

A small selection of the most popular adapters often available from stock.



There are many more than we can list in this catalogue, so please contact us with your requirements.



MAN PLATFORMS

A safe method of working at height.

Very robust and rigid man cage built to the high standard to be expected from Taylor Attachments.

Fully compliant with the HSE PM28 regulations, our man cages offer a safe method of working at height.

Specifications include-

- 2400mm x1100mm external frame with protective rear guard.
- Durbar tread plate floor for extra grip in wet conditions.
- Large tool tray with drain holes.
- Full length harness rail for added safety.
- Sprung latched and sprung loaded self closing door.
- Folded sections around the front and sides for structural longevity.
- Shot blasted, primed and finished in our usual high quality black paint.
- Tested to a safety factor of over 3, ensuring a SWL of 500kg.
- Supplied with test certificate.
- Fitted with fork sleeves as standard.
- Optional bolt on loader brackets available.







TESTIMONIALS

56

Great piece of kit, very well made and versatile

"Having had the 3 point linkage attachment for a couple of weeks now, we already find it invaluable. It is in constant use unloading/loading machines, shunting mounted and trailed implements around the yard and being used to aid repairs and machine PDI's in the workshop. Great piece of kit, very well made and versatile."

Ian Maddever, IDM Services SW LTD

6

Excellent service from Taylor Attachments

"The three point linkage headstock is a fantastic piece of kit. It makes life extremely easy and safe when it comes to doing repairs on implements, changing blades of tines and general maintenance. It provides a hassle free, safe and quick method of shifting things around our yard and workshop without having to use a tractor. It's also great for lifting machinery safely and accurately onto flatbed trailers. Well made and with excellent service from Taylor Attachments it's hard to imagine the yard without it!"

Finlay Hay, Hay Farms Easter Rhynd

GALLERY











NOTES



www.taylorattachments.co.uk