



FEEL THE DIFFERENCE

The Revolutionary Aquatic Surface
Unrivaled Comfort & Slip Resistance

STEPS ● POOLS ● DECKS

SAFER, SOFTER, SMARTER



1

COMFORT LAYERS

REBOUND provides unrivaled softness that your feet will thank you for! Three comfort layers will ease the minds of parents when their little ones take spills when running on decks!



2

SLIP RESISTANT

REBOUND's Pool & Deck surfaces are extremely slip resistant. A much safer choice for pool stairs, pool decks and splash pads.



3

EASE OF INSTALLATION

REBOUND can be applied over your existing pool surface, saving the time & money spent removing old plaster or pebble! Less mess & less noise! Minimal tools needed for installation!



4

CHLORINE STABLE

REBOUND surfaces have been lab tested and approved as chlorine stable. REBOUND materials have been used in demanding commercial and public splash pad applications for years.



5

DURABLE

REBOUND's flexible but durable polymer composite layers can hold up to patio chairs, dogs, drops, spills and all of nature's harsh elements without sacrificing its beauty.




6

UV RESISTANT


Clinically tested in the hot summer sun of Arizona, Rebound is proven to be resistant to the sun's damaging UV rays.

NO-SLIP COMFORT


Rebound's two layers of polymer and granules offer superior slip resistance and softness.

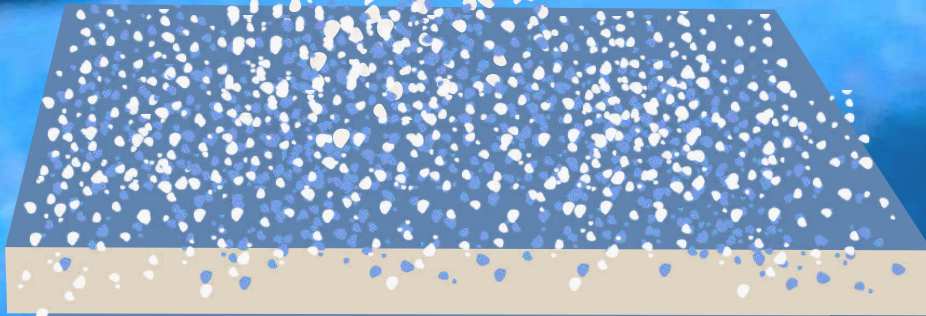

POLYMER &
GRANULES

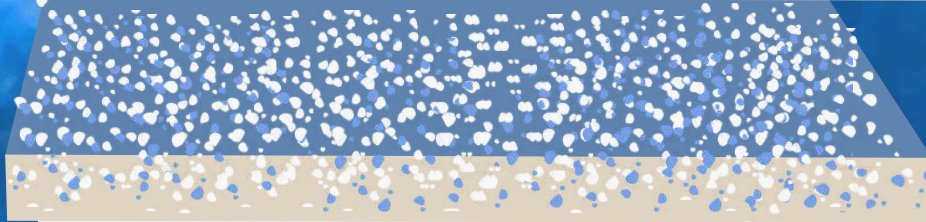

POLYMER &
GRANULES

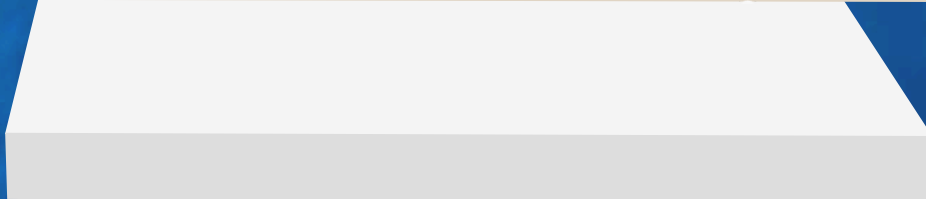

PRIMER/POLY



SURFACE

DURABLE FINISH

Made with time-tested materials found on high traffic commercial splash pads and all weather tracks.



CHEMICAL LEACHING



SLIP RESISTANCE



FUNGAL RESISTANCE



TENSILE PROPERTIES



FIRE RESISTANCE



TEAR STRENGTH



TABER ABRASION



ELONGATION



OZONE RESISTANCE

SAFER,
SOFTER,
SMARTER.

KEY FEATURES



✓ Ease of Installation

✓ Minimal Tools Needed


✓ Slip Resistant

✓ Chlorine Stable


✓ UV Resistant

✓ Durable


COLOR BLENDS



GLACIER LAKE



SANTORINI SEA



MIDNIGHT MAGIC



DESERT WINDS




ISLAND PARADISE




BAJA DUNES




INDIGO LAGOON




ROCKAWAY BEACH




TRADE WINDS




PACIFIC BREEZE



TAHOE SUMMER




EMERALD BAY




PEARL STORM




TWILIGHT HARBOR




CARIBBEAN OASIS



CORAL REEF



SAPPHIRE SAND



ROCKY SHORELINE




SLATE COBBLE



QUARTZ QUARRY



CHESTNUT COVE



TROPICAL COBALT

**NO EXTRA CHARGE
FOR CUSTOM COLORS**


The **SAFER, SOFTER, SMARTER** Surface
VISIT US ONLINE TO LEARN MORE • WWW.REBOUNDPOLS.COM



POOL SURFACE CARE



Maintain your colorful Rebound Surface by maintaining proper chemical levels at all times. Un-balanced water can result in scaling/discoloration of surface and/or algae growth.



Brush surface regularly to prevent dirt buildup, including steps and hard to reach areas. Scan QR Code for recommended brush. *Sepetrel Smart Pool Brush available at Amazon.*



Leaves and other organic debris will stain any pool surface, so removing them weekly will help with prevention.



Do not pour liquid chlorine or other chemicals directly over steps. Do not allow chlorine tablets to sit directly on surface, or floating chlorine dispensers to become stuck on top step.



Shedding of excess granules is normal and can be expected for several weeks after installation. These are minimally attached granules that do not effect the integrity or beauty of your Rebound Surface.





Rebound Limited Warranty

Warranty Info

Install Date: Start _____ End _____

Type: Pool ___ Deck ___ Steps ___ System: Primer Used ___ Double

Broadcast ___ Products: Rebound Polymer and .5 TPV Granules

Warranty: 5 Year ___

Project Name: _____

Project Owner: _____

Location: _____

Rebound Client: _____

This Limited Warranty Warrants Against the Following:

1) Rebound Pools, L.L.C. warrants that its Rebound Pool Surfaces pool and deck coating Products used in the above project shall be free from defects in materials for a period of 5 years for a double broadcast system from the above start date. Rebound Products are covered when installed according to the install instructions on properly prepared surfaces and in the proper thickness.

2) The workmanship warranty would be provided by the installer.

3) All warranties contained herein are expressly in Lieu of (and purchaser hereby waives) all other warranties, expressed, statutory or implied in fact or by law, including merchantability and fitness for a particular purpose. Purchaser further agrees that in no event shall Rebound Pools, L.L.C., on any claim of any kind, have any liability to the buyer for loss of use, loss of profits or for any indirect, incidental or consequential damages. This warranty is non-transferable and extends only to the original purchaser and does not extend to any subsequent owner or other transferee.

4)This limited warranty includes the following:

a)Chemical Resistant - Rebound Products will not deteriorate when used with appropriate pool chemistry conditions in standard aquatic environments. This does not include bleaching out of the system due to direct contact with chlorine and similar products or over shocking the pool. Proper pool chemistry documentation is required for any warranty claim.

b)Delamination on properly prepared substrates - Rebound bonds to properly prepared surfaces that are sufficient to adhere to and are clean and completely dry prior to install, not on smooth or previously coated surfaces.

c)Excessive granulation after initial shedding - Initial granulation will happen for the first couple of months. How much depends on how vigorous the final clean up is done by the installer. Over time there will be minimal granulation that can be cleaned easily by pool vacuums.

5)Rebound Pools, L.L.C.'s sole obligations hereunder are limited to the replacement of defective material and specifically excludes any installation or labor expenses including removal. If the same material is not available, Rebound Pools, L.L.C. reserves the right to supply material of a similar grade, color and quality.

6)This warranty does not cover damage due to lifting or shifting of the sub base or substrate beneath the sub base, cracking, abrasion, moisture issues, alkali, stains, cuts, burns, gouges, high heel indentations, shrinking of not more than 1/8", color variations, color fading, damage caused by use other than intended standard use, excessive wear and tear or any type of vandalism or acts of nature. Damage to equipment when granules are not installed properly.

7)For any claim, Rebound may require a sample be sent to our polymer manufacturer for testing. They would determine if moisture was present, a coating was on the surface or it was too smooth, not a CSP2 or 3. Pictures prior to the install may be needed to help show how the surface was prepared.

Warranty Activation

To activate this warranty, the pool builder or homeowner must send a signed copy to Rebound Pools, L.L.C. within 30 days of the installation.

Install Company _____

Signature _____

Name _____

Title _____

Date _____

Rebound Pools, L.L.C.

Signature _____











