



COPPER
PRESS[™].com

PRODUCT CATALOG
2020



CopperPress™ is Supply Source’s solution for professionals choosing to join copper tubing through the use of press technology. CopperPress™ is focused on quality, safety, reliability, and ease of use.

- 1/2” — 4” including couplings, elbows, tees, adapters, fitting reducers, caps, and langes
- Extensive offering of reducing tees
- Leak detection feature identifies un-crimped connections
- Compatible with most common pressing tools and jaws in the market
- EPDM (Ethylene Propylene Diene Monomer) seals are factory-installed & lubricated
- Packaged in common industry quantities

Benefits.....	3
System Data.....	4
Dimensional Data.....	5
Engineering Data.....	23
Installation Instructions	
Small Diameter (SD).....	24
Extra Large (XL).....	25
Notes.....	26

(877) 890-2283
www.copperpress.com

HQ • 168 Highway 274 #316
Lake Wylie, SC 29710

Supply Source Products reserves the right to change any portion of the information shown in this product catalog without obligation to change CopperPress® products previously or subsequently sold.

See www.copperpress.com for most current information.

Why CopperPress™ Fitting?

Press technology is growing in use as installers seek alternative methods due to skilled labor constraints and other factors. Its common piping system applications today range from those in new commercial building construction, to MRO factory maintenance, to retrofit and remodel of existing low control systems. Since the first design was patented, there have been a number of important evolutionary modifications. These improvements have been focused on providing greater ease of installation and on increasing the reliability of modern press technology.

CopperPress™ builds upon these advancements and continues the quest of improved joint design, increased holding power, and greater reliability. With patented design improvements and rigorous testing requirements, we are confident that we have accomplished all of these objectives.

We understand that press tool and jaw sets are an expensive investment for the contractor and inventory item for wholesalers. Therefore, we focused on improvements to the seal mechanics, rather than the basic design of the fitting. With our design, CopperPress™ fittings are compatible with most tools and jaws on the market, making it easy for the end user.

With CopperPress™ we are confident that we have engineered a better, more reliable joint that will withstand higher pressures and will yield significantly improved anti-creep performance.



System Description

CopperPress™ mechanical press copper fittings are for use in plumbing or mechanical applications. Sizes range from ½” – 2” and is made of lead-free dezincification resistant copper with an EPDM or HNBR o-ring. CopperPress™ fittings are designed to be used with ASTM B88 Type K, L and M ½” – 2” copper tubing in the hard-drawn condition and soft copper tubing in sizes ½” to 1¼”.

Applications

- All tubing must comply with the ASTM B88 standard.
- Approved for installations in above and below ground applications as allowed by local code

Operating Parameters

- Operating / Test Pressure = 200 psi / 600 psi
- Temperature Range = 0°F - 250°F

System Benefits


- Fast and easy to use
- Flameless
- Permanent connections
- Size range from 1/2” to 4”
- Large selection of fittings
- Consistent professional appearance
- Less equipment required
- Environmentally friendly system
- Compatibility of fittings and tools

Approved Applications

- Potable water
- Hydronic heating (w/ glycol)
- Chilled water
- Compressed air (200 PSI max)
- Non-medical gases (140 PSI max)
- Low pressure steam (15 PSI max)
- Vacuum (24.5” mercury max @ 68°F)



Approvals and Certifications

- NSF ANSI/CAN 61
- UPC
- cUPC
- IPC
- IAPMO PS-117
- ICC-ES-PMG
- ASME B16.51




Small Diameter 90° Elbow

Item Number	Size D1 (in)	L1 (in)	A (in)
11230	1/2"	1.56	0.75
11240	3/4"	1.97	1.02
11250	1"	2.24	1.30
11260	1 1/4"	2.64	1.50
11270	1 1/2"	3.23	1.77
11280	2"	3.98	2.36




Small Diameter 90° Street Elbow

Item Number	D1 (in)	L1 (in)	A (in)	L2 (in)
11350	1/2"	1.48	0.67	1.73
11360	3/4"	1.93	0.98	2.09
11370	1"	2.17	1.22	2.36
11380	1 1/4"	2.52	1.38	2.91
11390	1 1/2"	3.15	1.69	3.54
11400	2"	3.94	2.32	4.29




Small Diameter 45° Elbow

Item Number	Size D1 (in)	L (in)	A (in)
11470	1/2"	1.10	0.30
11480	3/4"	1.40	0.45
11490	1"	1.52	0.57
11500	1 1/4"	1.97	0.83
11510	1 1/2"	2.30	0.85
11520	2"	2.44	0.83




Small Diameter **45° Street Elbow**

Item Number	Size D1 (in)	L1 (in)	A (in)	L2 (in)
11590	1/2"	1.10	0.30	1.22
11600	3/4"	1.40	0.45	1.46
11610	1"	1.52	0.57	1.57
11620	1 1/4"	1.97	0.83	1.94
11630	1 1/2"	2.30	0.85	2.36
11640	2"	2.44	0.83	2.76

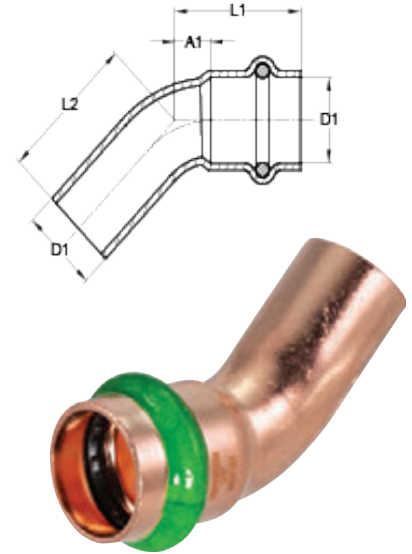


Small Diameter **Coupling with Stop**

Item Number	D1 (in)	D2 (in)	L1 (in)
12230	1/2"	1.77	0.16
12240	3/4"	2.05	0.16
12250	1"	2.05	0.16
12260	1 1/4"	2.44	0.16
12270	1 1/2"	3.19	0.28
12280	2"	3.50	0.28




Small Diameter **Coupling No Stop**

Item Number	D1 (in)	L (in)
12290	1/2"	1.77
12300	3/4"	2.05
12310	1"	2.05
12320	1 1/4"	2.44
12330	1 1/2"	3.19
12340	2"	3.50




Small Diameter **Extended Coupling No Stop**

Item Number	D1 (in)	L (in)
12350	1/2"	2.99
12360	3/4"	3.54
12370	1"	3.74
12380	1 1/4"	4.13
12390	1 1/2"	4.72
12400	2"	5.31




Small Diameter **Coupling Reducer**

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
12410	3/4"	1/2"	2.11	0.35
12420	1"	1/2"	2.26	0.51
12430	1"	3/4"	2.24	0.35
12435	1 1/4"	1/2"	2.66	0.71
12440	1 1/4"	3/4"	2.66	0.57
12450	1 1/4"	1"	2.50	0.41





Small Diameter **Bushing Reducer**

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
12530	3/4"	1/2"	2.05	1.24
12540	1"	1/2"	2.32	1.52
12550	1"	3/4"	2.24	1.30
12560	1 1/4"	1/2"	2.64	1.83
12570	1 1/4"	3/4"	2.64	1.69
12580	1 1/4"	1"	2.52	1.57
12585	1 1/2"	1/2"	3.03	2.22
12590	1 1/2"	3/4"	3.11	2.17
12600	1 1/2"	1"	2.95	2.01
12610	1 1/2"	1 1/4"	3.03	1.89




Small Diameter Bushing Reducer (continued)


Item Number	D1 (in)	D2 (in)	L (in)	A (in)
12613	2"	1/2"	3.66	2.85
12617	2"	3/4"	3.74	2.80
12620	2"	1"	3.54	2.60
12630	2"	1 1/4"	3.58	2.44
12640	2"	1 1/2"	3.70	2.24

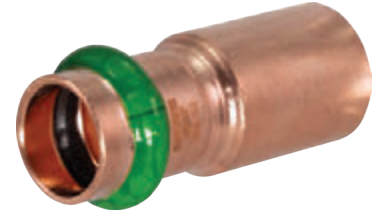
Small Diameter Cap

Item Number	D1 (in)	L1 (in)	A (in)
13110	1/2"	0.94	0.14
13120	3/4"	1.06	0.12
13140	1"	1.06	0.12
13150	1 1/4"	1.26	0.12
13160	1 1/2"	1.69	0.24
13170	2"	1.85	0.24



Small Diameter Equal Tee

Item Number	D1 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)
14110	1/2"	1.56	0.75	1.28	0.47
14140	3/4"	1.79	0.85	1.57	0.63
14190	1"	1.91	0.96	1.73	0.79
14280	1 1/4"	2.13	0.98	2.20	1.06
14400	1 1/2"	2.62	1.16	2.76	1.30
14510	2"	2.99	1.38	3.15	1.54




Small Diameter Unequal Tee

Item Number	D1 (in)	D2 (in)	D3 (in)	L1 (in)	L2 (in)	L3 (in)	A1 (in)	A2 (in)	A3 (in)
14120	½"	½"	¾"	1.71	0.91	1.71	0.91	1.54	0.59
14130	½"	½"	1"	1.73	0.79	1.71	0.91	1.71	0.91
14150	¾"	½"	½"	1.63	0.69	1.75	0.94	1.40	0.59
14160	¾"	½"	¾"	1.79	0.85	1.87	1.06	1.57	0.63
14170	¾"	¾"	½"	1.63	0.69	1.63	0.69	1.38	0.57
14180	¾"	¾"	1"	1.91	0.96	1.91	0.96	1.97	1.02
14195	1"	1"	¾"	1.63	0.69	2.01	1.20	1.59	0.79
14200	1"	½"	¾"	1.79	0.85	2.13	1.32	1.73	0.79
14210	1"	½"	1"	1.91	0.96	2.22	1.42	1.73	0.79
14220	1"	¾"	½"	1.63	0.69	1.91	0.96	1.59	0.79
14230	1"	¾"	¾"	1.79	0.85	2.01	1.06	1.73	0.79
14240	1"	¾"	1"	1.91	0.96	2.17	1.22	1.73	0.79
14250	1"	1"	½"	1.63	0.69	1.63	0.69	1.59	0.79
14260	1"	1"	¾"	1.79	0.85	1.79	0.85	1.73	0.79
14270	1"	1"	1¼"	1.93	0.98	2.24	1.30	2.32	1.18
14290	1¼"	½"	1¼"	2.13	0.98	2.62	1.81	2.19	1.04
14300	1¼"	¾"	½"	1.77	0.63	2.19	1.24	1.91	1.10
14310	1¼"	¾"	¾"	1.87	0.73	2.01	1.20	2.11	1.16
14320	1¼"	¾"	1"	1.99	0.85	2.38	1.44	2.03	1.08
14330	1¼"	¾"	1¼"	2.13	0.98	2.44	1.50	2.19	1.04
14340	1¼"	1"	½"	1.77	0.63	2.09	1.14	1.91	1.10
14350	1¼"	1"	¾"	1.87	0.73	2.11	1.16	2.11	1.16
14360	1¼"	1"	1"	1.99	0.85	2.22	1.28	2.03	1.08
14365	1¼"	1"	1¼"	2.13	0.98	2.24	1.30	2.19	1.04
14370	1¼"	1¼"	½"	1.77	0.63	1.77	0.63	1.91	1.10
14380	1¼"	1¼"	¾"	1.87	0.73	1.87	0.73	2.11	1.16
14390	1¼"	1¼"	1"	1.99	0.85	1.99	0.85	2.03	1.08
14395	1½"	½"	1½"						
14410	1½"	1"	¾"	2.13	0.67	2.36	1.42	2.09	1.14

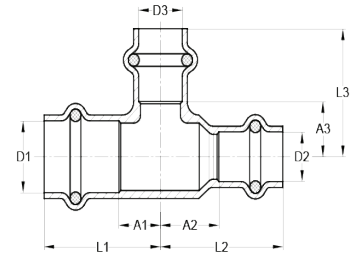



Small Diameter **Unequal Tee** (continued)

Item Number	D1 (in)	D2 (in)	D3 (in)	L1 (in)	L2 (in)	L3 (in)	A1 (in)	A2 (in)	A3 (in)
14420	1½"	1"	1"	2.26	0.81	2.38	1.44	2.09	1.14
14430	1½"	1"	½"	2.62	1.16	2.70	1.75	2.76	1.30
14435	1½"	¼"	½"						
14440	1½"	¼"	¾"	2.13	0.67	2.28	1.14	2.09	1.14
14450	1½"	¼"	1"	2.26	0.81	2.34	1.20	2.09	1.14
14460	1½"	¼"	¼"	2.38	0.93	2.54	1.40	2.24	1.10
14465	1½"	¼"	½"						
14500	1½"	½"	¼"	2.38	0.93	2.38	0.93	2.24	1.10
14515	2"	1"	1"						
14520	2"	½"	½"	2.66	1.04	2.89	1.75	2.60	1.46
14530	2"	½"	¾"	2.42	0.81	2.85	1.40	2.40	1.46
14540	2"	½"	1"	2.54	0.93	2.93	1.48	2.44	1.50
14550	2"	½"	¼"	2.66	1.04	3.09	1.63	2.60	1.46
14560	2"	½"	½"	2.78	1.16	3.25	1.79	2.99	1.54
14570	2"	½"	2"	2.99	1.38	3.43	1.97	3.15	1.54
14580	2"	2"	½"	2.42	0.81	2.42	0.81	2.52	1.71
14590	2"	2"	¾"	2.42	0.81	2.42	0.81	2.40	1.46
14600	2"	2"	1"	2.54	0.93	2.54	0.93	2.44	1.50
14610	2"	2"	¼"	2.66	1.04	2.66	1.04	2.60	1.46
14620	2"	2"	½"	2.78	1.16	2.78	1.16	2.99	1.54

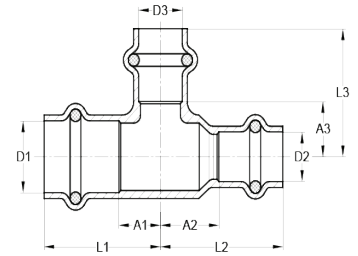


XL 90° Elbow

Item Number	D1 (in)	L (in)	A (in)
22110	2½"	4.84	3.11
22120	3"	5.71	3.70
22130	4"	7.17	4.76




XL 90° Street Elbow

Item Number	D1 (in)	L (in)	A (in)	L2 (in)
22140	2½"	4.69	2.95	5.16
22150	3"	5.55	3.54	6.06
22160	4"	7.17	4.76	7.64

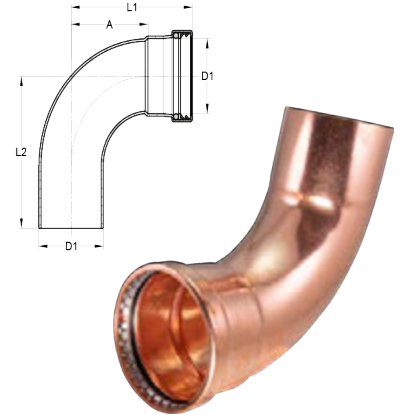


XL 45° Elbow

Item Number	D1 (in)	L (in)	A (in)
22170	2½"	3.15	1.42
22180	3"	3.70	1.69
22190	4"	4.80	2.40

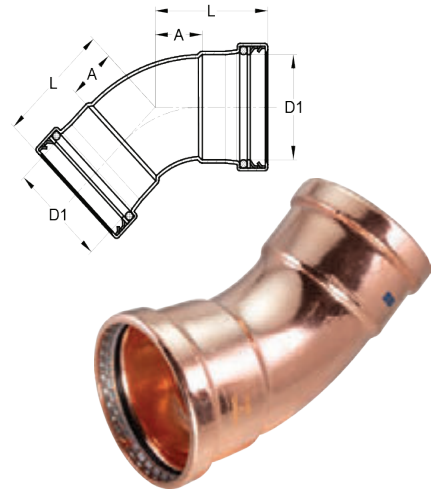


XL 45° Street Elbow

Item Number	D1 (in)	L (in)	A (in)	L2 (in)
22200	2½"	3.15	1.42	3.39
22210	3"	3.70	1.69	3.98
22220	4"	4.80	2.40	5.08

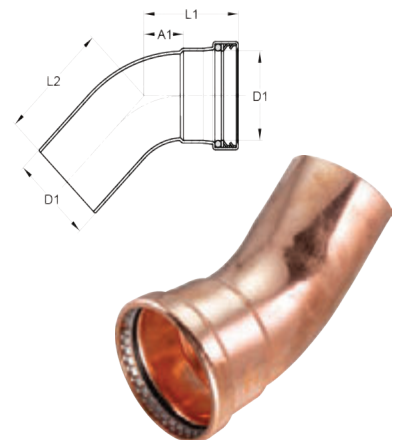


XL Coupling with Stop

Item Number	D1 (in)	L (in)	A (in)
22230	2½"	3.86	0.39
22240	3"	4.37	0.35
22250	4"	5.20	0.39




XL Coupling No Stop

Item Number	D1 (in)	L (in)
22260	2½"	3.86
22270	3"	4.37
22280	4"	5.20




XL Coupling Reducer

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
22290	2½"	1¼"	3.90	1.02
22300	2½"	1½"	4.17	0.98
22310	2½"	2"	3.98	0.63
22320	3"	1¼"	4.76	1.61
22330	3"	1½"	4.76	1.30
22340	3"	2"	4.65	1.02
22350	3"	2½"	4.29	0.55
22360	4"	2"	5.98	1.97
22370	4"	2½"	5.47	1.34
22380	4"	3"	5.24	0.83
22390	2½"	1¼"	3.90	1.02
22290	2½"	1½"	4.17	0.98
22300	2½"	2"	3.98	0.63




XL Bushing Reducer

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
22400	2½"	1"	4.25	3.31
22410	2½"	1¼"	4.06	2.91
22420	2½"	1½"	4.29	2.83
22430	2½"	2"	4.25	2.64
22440	3"	1¼"	4.53	3.39
22450	3"	1½"	4.92	3.46
22460	3"	2"	4.80	3.19
22470	3"	2½"	4.53	2.80
22480	4"	2"	6.18	4.57
22490	4"	2½"	5.79	4.06
22500	4"	3"	5.71	3.70




XL Male Adapter

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
22510	2½"	2½" MPT	3.78	2.05
22520	3"	3" MPT	4.09	2.09
22530	4"	4" MPT	4.69	2.28




Small Diameter Female Adapter

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
22600	½"	¾" FPT	1.65	0.85
22610	½"	½" FPT	1.69	0.89
22620	½"	¾" FPT	1.77	0.96
22630	¾"	½" FPT	2.05	1.10
22640	¾"	¾" FPT	1.89	0.94
22650	1"	½" FPT	2.05	1.10
22660	1"	¾" FPT	2.13	1.18




Small Diameter Female Adapter (continued)


Item Number	D1 (in)	D2 (in)	L (in)	A (in)
22670	1"	1" FPT	1.93	0.98
22680	1"	1¼" FPT	1.97	1.02
22690	1¼"	1" FPT	2.09	1.14
22700	1¼"	1¼" FPT	2.20	1.06
22710	1¼"	1½" FPT	2.20	1.06
22720	1½"	1¼" FPT	2.28	1.14
22730	1½"	1½" FPT	2.70	1.24
22740	2"	2" FPT	2.64	1.18

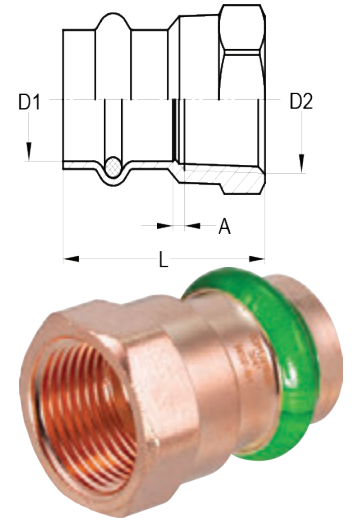
XL Female Adapter

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
22750	2½"	2½" FPT	3.54	0.67
22760	3"	3" FPT	3.98	0.75
22770	4"	4" FPT	4.37	0.59

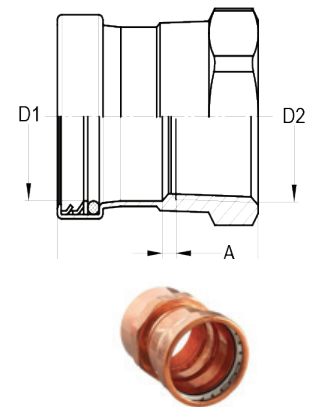

Small Diameter Male Street Adapter

Item Number	D1 (in)	D2 (in)	L (in)
22900	½"	⅜" MPT	1.69
22910	½"	⅜" MPT	1.77
22920	½"	¾" MPT	1.93
22930	¾"	½" MPT	1.93
22940	¾"	¾" MPT	1.97
22950	1"	¾" MPT	1.97
22960	1"	1" MPT	2.13
22970	1¼"	1¼" MPT	2.48
22980	1½"	1½" MPT	2.87
22990	2"	2" MPT	3.19

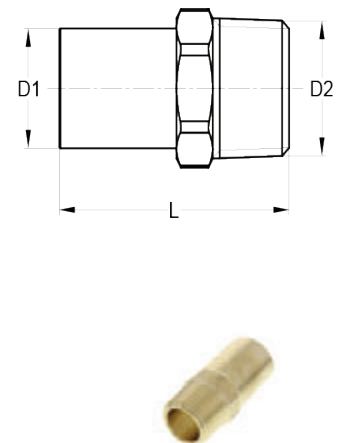


XL Cap

Item Number	D1 (in)	L (in)	A (in)
23110	2½"	2.17	0.43
23120	3"	2.44	0.43
23130	4"	2.87	0.47




Small Diameter Male Adapter

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
23250	½"	¾" MPT	1.65	0.85
23260	½"	½" MPT	1.69	0.89
23270	½"	¾" MPT	1.77	0.96
23280	¾"	½" MPT	2.05	1.10
23290	¾"	¾" MPT	1.89	0.94
23300	¾"	1" MPT	2.05	1.10
23310	1"	½" MPT	2.13	1.18
23320	1"	¾" MPT	1.93	0.98
23330	1"	1" MPT	1.97	1.02
23340	1"	1¼" MPT	2.09	1.14
23350	1¼"	1" MPT	2.20	1.06
23360	1¼"	1¼" MPT	2.20	1.06
23370	1¼"	1½" MPT	2.28	1.14
23380	1½"	1¼" MPT	2.70	1.24
23390	1½"	1½" MPT	2.64	1.18
23400	1½"	2" MPT	2.64	1.18
23410	2"	1½" MPT	2.83	1.22
23420	2"	2" MPT	2.80	1.18




XL Unequal Tee

Item Number	D1 (in)	D2 (in)	D3 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)	L3 (in)	A3 (in)
24110	2½"	¾"	2½"	3.56	1.83	4.17	3.23	3.66	1.93
24120	2½"	1"	2½"	3.56	1.83	4.19	3.25	3.60	1.87
24130	2½"	1¼"	2½"	3.56	1.83	4.35	3.21	3.60	1.87
24140	2½"	1½"	2½"	3.56	1.83	4.61	3.15	3.60	1.87
24150	2½"	2"	¾"	3.25	1.52	3.72	2.11	3.74	2.80
24160	2½"	2"	1"	3.25	1.52	3.72	2.11	3.54	2.60
24165	2½"	2"	1¼"	3.25	1.52	3.72	2.11	3.58	2.44
24170	2½"	2"	1½"	3.25	1.52	3.72	2.11	3.74	2.28
24180	2½"	2"	2"	3.25	1.52	3.72	2.11	3.43	1.81
24190	2½"	2"	2½"	3.56	1.83	3.56	1.95	3.66	1.93
24200	2½"	2½"	½"	3.25	1.52	3.25	1.52	3.66	2.85
24210	2½"	2½"	¾"	3.25	1.52	3.25	1.52	3.70	2.76
24220	2½"	2½"	1"	3.25	1.52	3.25	1.52	3.58	2.64
24230	2½"	2½"	1¼"	3.25	1.52	3.25	1.52	3.58	2.44
24240	2½"	2½"	1½"	3.25	1.52	3.25	1.52	3.74	2.28
24250	2½"	2½"	2"	3.25	1.52	3.25	1.52	3.43	1.81
24270	3"	¾"	3"	4.11	2.11	5.10	4.15	4.31	2.30
24280	3"	1"	3"	4.11	2.11	4.92	3.98	4.31	2.30
24290	3"	1¼"	3"	4.11	2.11	5.02	3.88	4.31	2.30
24300	3"	1½"	3"	4.11	2.11	5.10	3.64	4.31	2.30
24310	3"	2"	2"	3.64	1.63	4.35	2.74	3.76	2.15
24320	3"	2"	2½"	3.98	1.97	4.69	3.07	4.00	2.26
24330	3"	2"	3"	4.11	2.11	4.55	2.93	4.31	2.30
24340	3"	2½"	2"	3.64	1.63	4.15	2.42	3.76	2.15
24350	3"	2½"	2½"	3.98	1.97	4.49	2.76	4.00	2.26
24360	3"	2½"	3"	4.11	2.11	4.74	3.01	4.31	2.30
24370	3"	3"	½"	3.64	1.63	3.64	1.63	4.07	3.27




XL Unequal Tee (continued)

Item Number	D1 (in)	D2 (in)	D3 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)	L3 (in)	A3 (in)
24380	3"	3"	¾"	3.64	1.63	3.64	1.63	4.15	3.21
24390	3"	3"	1"	3.64	1.63	3.64	1.63	3.96	3.01
24400	3"	3"	1¼"	3.64	1.63	3.64	1.63	4.07	2.93
24410	3"	3"	1½"	3.64	1.63	3.64	1.63	4.31	2.85
24420	3"	3"	2"	3.64	1.63	3.64	1.63	3.76	2.15
24430	3"	3"	2½"	3.98	1.97	3.98	1.97	4.00	2.26
24450	4"	3"	2"	4.02	1.61	4.80	2.80	3.25	1.63
24460	4"	3"	3"	4.51	2.11	4.82	2.81	4.63	2.62
24470	4"	4"	½"	4.02	1.61	4.02	1.61	4.63	3.82
24480	4"	4"	¾"	4.02	1.61	4.02	1.61	4.59	3.64
24490	4"	4"	1"	4.02	1.61	4.02	1.61	4.43	3.48
24490									
24500	4"	4"	1¼"	4.02	1.61	4.02	1.61	4.43	3.29
24510	4"	4"	1½"	4.02	1.61	4.02	1.61	4.59	3.13
24520	4"	4"	2"	4.02	1.61	4.02	1.61	4.23	2.62
24530	4"	4"	2½"	4.17	1.77	4.17	1.77	4.47	2.74
24540	4"	4"	3"	4.51	2.11	4.51	2.11	4.59	2.58
24550	4"	3"	2"	4.02	1.61	4.80	2.80	3.25	1.63




XL Equal Tee

Item Number	D1 (in)	L1 (in)	A (in)	L2 (in)	A2 (in)
24225	2½"	3.56	1.83	3.66	1.93
24440	3"	4.11	2.11	4.33	2.32
24550	4"	5.00	2.60	5.12	2.72




Small Diameter **90° Reducing Elbow**

Item Number	D1 (in)	D2 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)
24560	¾"	½"	1.83	0.89	1.69	0.89
24570	1"	¾"	1.73	0.93	1.79	1.28




Small Diameter **Female Street Adapter**

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
32000	½"	⅜" FPT	1.57	1.10
32010	½"	½" FPT	1.73	1.18
32020	½"	¾" FPT	1.93	1.30
32030	¾"	½" FPT	1.73	1.18
32040	¾"	¾" FPT	1.93	1.30
32050	1"	½" FPT	1.81	1.26
32060	1"	¾" FPT	1.93	1.30
32070	1"	1" FPT	1.99	1.28
32080	1¼"	1¼" FPT	2.32	1.54
32090	1½"	1½" FPT	2.58	1.75
32100	2"	2" FPT	3.07	2.09




Small Diameter **Union**

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
33000	½"	½"	2.76	1.14
33010	¾"	¾"	2.99	1.10
33020	1"	1"	3.31	1.42
33030	1¼"	1¼"	3.54	1.26
33040	1½"	1½"	4.25	1.34
33050	2"	2"	4.61	1.38




Small Diameter Male Union

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
34000	½"	½" MPT	2.76	1.14
34010	¾"	¾" MPT	2.99	1.10
34020	1"	1" MPT	3.31	1.42
34030	1¼"	1¼" MPT	3.54	1.26
34040	1½"	1½" MPT	4.25	1.34
34050	2"	2" MPT	4.61	1.38

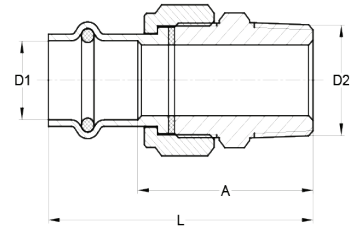


Small Diameter Female Union

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
35000	½"	½" FPT	2.48	1.67
35010	¾"	¾" FPT	2.66	1.71
35020	1"	1" FPT	2.97	2.03
35030	1¼"	1¼" FPT	3.39	2.24
35040	1½"	1½" FPT	3.98	2.52
35050	2"	2" FPT	4.23	2.62




Small Diameter Dielectric Female Union

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
37000	½"	½" FPT	2.64	1.32
37010	¾"	¾" FPT	3.07	1.54
37020	1"	1" FPT	2.76	1.14
37030	1¼"	1¼" FPT	3.03	1.10
37040	1½"	1½" FPT	3.46	1.22
37050	2"	2" FPT	3.78	1.22




Small Diameter Tee Female Reducer P x P x FPT

Item Number	D1 (in)	D2 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)
40000	½"	½" FPT	1.56	0.75	1.44	0.89
40010	¾"	¼" FPT	1.63	0.69	1.34	0.93
40020	¾"	½" FPT	1.79	0.85	1.38	0.83
40030	¾"	¾" FPT	1.79	0.85	1.61	0.98
40040	1"	½" FPT	1.63	0.69	1.71	1.16
40050	1"	¾" FPT	1.79	0.85	1.85	1.22
40060	1¼"	½" FPT	1.87	0.73	1.77	1.22
40070	1¼"	¾" FPT	1.99	0.85	1.85	1.22
40080	1½"	½" FPT	2.13	0.67	1.81	1.26
40100	1½"	¾" FPT	2.26	0.81	1.97	1.34
40110	2"	½" FPT	2.42	0.81	2.13	1.57
40120	2"	¾" FPT	2.54	0.93	2.32	1.69

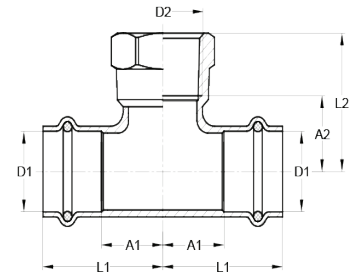

XL Unequal Tee

Item Number	D1 (in)	D2 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)
42000	2½"	¾" FPT	3.25	1.52	3.50	2.87
42010	2½"	2" FPT	3.25	1.52	3.43	2.48
42020	3"	¾" FPT	3.64	1.63	4.02	3.39
42030	3"	2" FPT	3.64	1.63	3.58	2.64
42040	4"	¾" FPT	4.02	1.61	3.90	3.27
42050	4"	2" FPT	4.02	1.61	3.70	2.76
42060	2½"	¾" FPT	3.25	1.52	3.50	2.87




Small Diameter 90° Male Elbow P x MPT

Item Number	D1 (in)	D2 (in)	L1 (in)	A1 (in)	L2 (in)
48000	½"	¾" MPT	2.01	1.20	2.01
48010	¾"	½" FPT	2.15	1.20	2.15
48020	1¼"	1¼" MPT	2.64	1.50	2.64
48030	1½"	1½" MPT	3.23	1.77	3.23
48040	2"	2" FPT	4.25	2.64	4.25




Small Diameter 90° Female Elbow P x FPT

Item Number	D1 (in)	D2 (in)	L1 (in)	A1 (in)	L2 (in)	A2 (in)
49000	½"	⅜" FPT	1.56	0.75	1.44	1.00
49010	½"	½" FPT	1.73	0.93	1.79	1.28
49020	½"	¾" FPT	1.73	0.93	1.91	1.32
49030	¾"	½" FPT	2.03	1.08	2.01	1.50
49040	¾"	¾" FPT	2.03	1.08	2.13	1.54
49050	1"	½" FPT	2.24	1.30	2.24	1.73
49060	1"	1" FPT	2.24	1.30	2.52	1.85
49070	1¼"	1¼" FPT	2.64	1.50	2.52	1.73
49080	1½"	1½" FPT	3.23	1.77	3.31	2.52
49090	2"	2" FPT	3.98	2.36	4.21	3.27





Small Diameter Pex Adapter

Item Number	D1 (in)	D2 (in)	L (in)	A (in)
50000	½"	½" PEX	1.73	0.20
50010	½"	¾" PEX	1.54	0.08
50020	¾"	½" PEX	1.97	0.35
50030	¾"	¾" PEX	1.93	0.26
50040	1"	1" PEX	2.13	0.30



Adapter Flange

Item Number	D1 (in)	L (in)	A (in)	b (in)	D (in)	K (in)	d (in)
60000	1"	2.28	1.34	0.63	4.33	3.11	0.63
60010	1¼"	2.28	1.14	0.63	4.53	3.50	0.63
60020	1½"	2.60	1.14	0.63	4.92	3.86	0.63
60030	2"	2.76	1.14	0.63	5.91	4.76	0.75
60040	2½"	2.83	1.10	0.69	7.09	5.51	0.75
60050	3"	3.35	1.34	0.81	7.48	5.98	0.75
60060	4"	3.74	1.34	0.89	9.06	7.52	0.75




CopperPress™ fittings are designed to be joined with ASTM B88 seamless copper water tube (K, L, & M) in residential and commercial plumbing and mechanical systems. Listed below are common applications approved for CopperPress™ fittings.

Fluids / Water - Potable			
Hot and Cold Water	—	200 psi	32°F to 250°F
Rainwater / Grey Water	—	200 psi	-20°F to 250°F
Chilled Water	Ethylene Glycol / Propylene Glycol	200 psi	-20°F to 250°F
Hydronic Heating	Ethylene Glycol / Propylene Glycol	200 psi	-20°F to 250°F
Cooling Water	Up to 50% Ethylene Glycol or Propylene Glycol solution	200 psi	-20°F to 250°F
Low-Pressure Steam	—	Up to 15 psi	248°F
Fuel, Oil and Lubricant			
Ethanol	Pure Grain Alcohol	200 psi	—
Gases			
Compressed Air	Less than 25mg/m ³ oil content	200 psi	Up to 140°F
Oxygen - O ₂ (non medical)	Keep oil and fat free/non-liquid O ₂	140 psi	Up to 140°F
Nitrogen - N ₂	—	200 psi	Up to 140°F
Argon	Welding Use	200 psi	Up to 140°F
Hydrogen - H ₂	—	125 psi	Up to 140°F
Vacuum	—	Max 29.2 inches of Mercury	Up to 140°F
Carbon Dioxide - CO ₂	Dry	—	Up to 140°F

Contact Customer Service at **(877) 890-2283** or **www.copperpress.com** for more information on applications not listed and applications outside the temperature and pressure ranges listed above.

Fluids containing hydrocarbon-based oils are not compatible with the EPDM seal.

Small Diameter (SD)

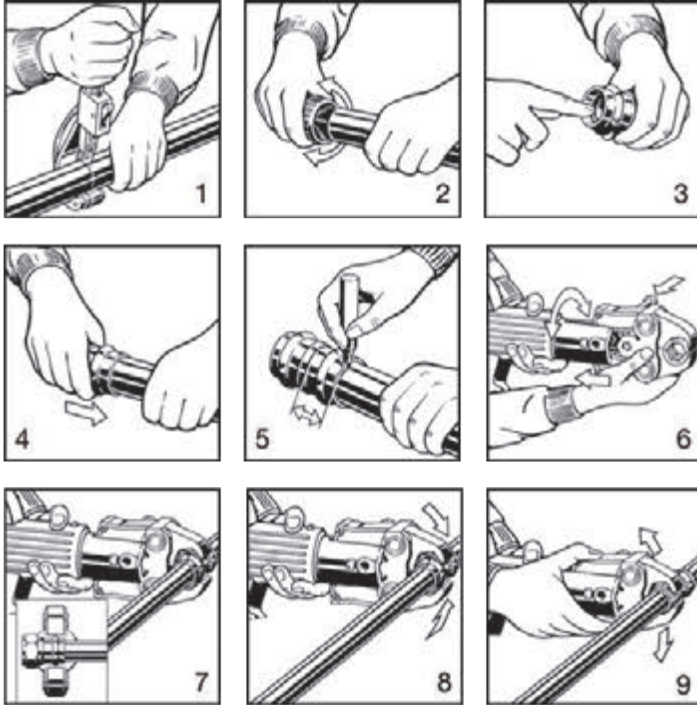

WARNING. Read and understand all instructions for installing CopperPress™. Failure to follow all instructions may result in extensive property damage, serious injury or death.

1. Cut copper tubing at right angles using displacement type cutter or fine-toothed steel saw.
2. Remove burr from inside and outside of tubing to prevent cutting sealing element.
3. Check seal for correct fit. Do not use oils or lubricants. Use only CopperPress™ sealing elements.
4. Mark proper insertion depth as indicated by the CopperPress™ Insertion Depth Chart. Improper insertion depth may result in improper seal.
5. While turning slightly, slide press fitting onto tubing to the marked depth.
Note: End of tubing must contact stop.
6. Insert approved jaw into the pressing tool and push in, holding pin until it locks in place.
7. Open the jaw and place at right angles on the fitting. Visually check insertion depth using mark on tubing.
8. Start pressing process and hold the trigger until the jaw has engaged the fitting.
9. After pressing cycle is completed, the jaw can be opened again.

CopperPress™ Insertion Depth Chart

Tube Size	½"	¾"	1"	1¼"	1½"	2"
Insertion Depth	¾"	⅞"	⅞"	1"	1 ⅞"	1 ⅞"




LEAK TESTING. Unpressed connections are located by pressurizing the system with air or water. When testing with water the proper pressure range is 15 psi to 85 psi maximum. Leak testing with air can be dangerous at high pressures. When testing with compressed air the proper pressure range is ½ psi to 45 psi maximum. Following a successful leak test, the system may be pressure tested up to 200 psi with air, or up to 600 psi with water, if required by local code requirements or project specifications.

Installation Instructions

Extra Large Diameter (XL)

WARNING. Read and understand all instructions for installing CopperPress™. Failure to follow all instructions may result in extensive property damage, serious injury or death.

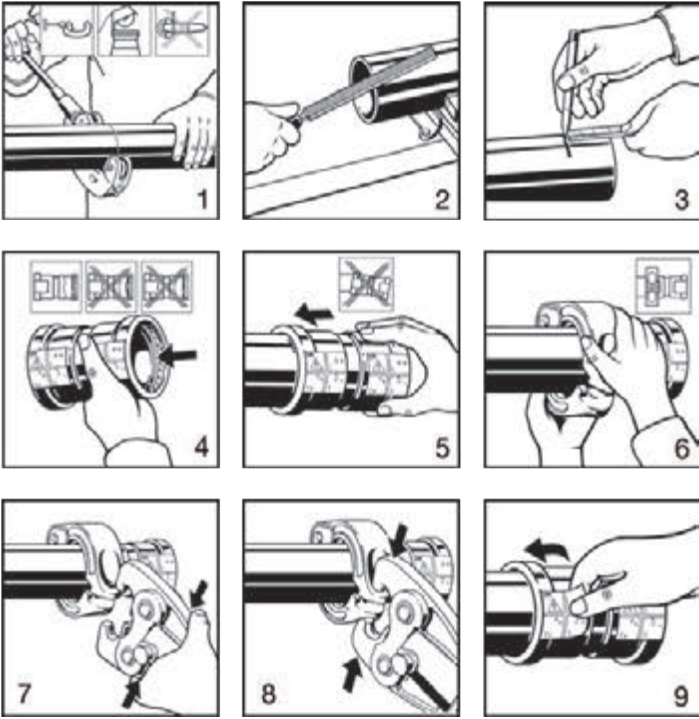

1. Cut copper tubing at right angle using displacement type cutter or fine-toothed steel saw.
2. Remove burr from inside and outside of tubing to prevent cutting sealing element.
3. Measure and mark Proper insertion depth as indicated by the CopperPress™ insertion depth chart.

Note: Improper insertion may result in improper seal.

4. Check sealing element in CopperPress™ product for correct fit. Do not use oils or lubricants. Use only CopperPress™ sealing elements.
5. While turning slightly, slide press fitting onto tubing to the marked depth or until fully seated on stop.
6. Using approved CopperPress™ Press tool and jaw/rings sets place the ring over the fitting at the bead to be pressed.
7. Open the Jaw on the press tool and close on the appropriate location on the ring.
8. Start the pressing process by holding the trigger continuously until the tool has made a complete press cycle.
9. After tool has completed a full press cycle the jaw and ring can be opened and removed. Remove the application label sticker to complete the process.

Copper Press Insertion Depth Chart

Tube Size	2 ½"	3"	4"
Insertion Depth	1 11/16"	1 15/16"	2 3/8"



LEAK TESTING. Unpressed connections are located by pressurizing the system with air or water. When testing with water the proper pressure range is 15 psi to 85 psi maximum. Leak testing with air can be dangerous at high pressures. When testing with compressed air the proper pressure range is ½ psi to 45 psi maximum. Following a successful leak test, the system may be pressure tested up to 200 psi with air, or up to 600 psi with water, if required by local code requirements or project specifications.



COPPER
PRESSTM.com

FOCUSED

on the details that matter the most to our customers



(877) 890-2283

www.copperpress.com

HQ • 168 Highway 274 #316
Lake Wylie, SC 29710