



<b>Job Name</b>	
<b>Job Location</b>	
<b>P.O.#</b>	
<b>Engineer</b>	
<b>Contractor</b>	
<b>Wholesaler</b>	
<b>CopperPress® Rep</b>	


**Description:** CopperPress® Press Adapter Flange is available in sizes 1” – 4” and is made of lead-free dezincification resistant copper with an EPDM or HNBR o-ring. CopperPress® fittings are designed to be used with ASTM B88 Type K, L and M ½” – 2” copper tubing in the hard-drawn condition and soft copper tubing in sizes ½” to 1¼”.

**Features:**

- **Visual Indicator Press Ring (VIPR)** – facilitates immediate identification of un-pressed connections
- **Leak Before Press** – in addition to the VIPR, valve incorporates four path LBP technology, guaranteeing a visual indication if not pressed
- **Permanent Application Marking** – imprinted on fitting body for quick H<sub>2</sub>O or gas application identification
- **Lead Free Construction** – fully compliant with current lead-free laws
- **Copper Ends** - protect against dezincification and stress corrosion cracking

**Operational Parameters:** Operating / Test Pressure = 300 psi / 600 psi, Temperature Range 0°F - 250°F

**Approvals:** NSF ANSI/CAN 61, UPC, cUPC, IPC, IAPMO PS-117, ICC-ES-PMG, ASME B16.51

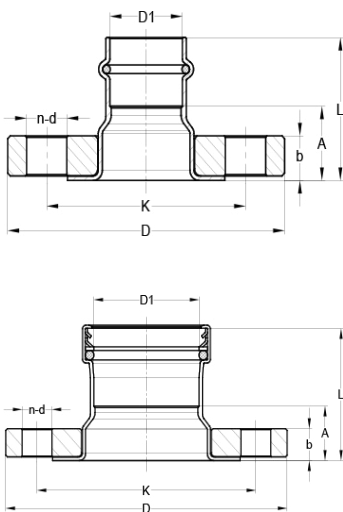

Item Number	D1 (in)	L (in)	A (in)	b (in)	D (in)	K (in)	d (in)
60000	1”	2.28	1.34	0.63	4.33	3.11	0.63
60010	1¼”	2.28	1.14	0.63	4.53	3.50	0.63
60020	1½”	2.60	1.14	0.63	4.92	3.86	0.63
60030	2”	2.76	1.14	0.63	5.91	4.76	0.75
60040	2½”	2.83	1.10	0.69	7.09	5.51	0.75
60050	3”	3.35	1.34	0.81	7.48	5.98	0.75
60060	4”	3.74	1.34	0.89	9.06	7.52	0.75

Customer Service (877) 890-2283  
[www.copperpress.com](http://www.copperpress.com)

Supply Source Products reserves the right to change any portion of the information shown on this submittal without obligation to change CopperPress® products previously or subsequently sold. See [www.copperpress.com](http://www.copperpress.com) for most current information.

