

|                         |  |
|-------------------------|--|
| <b>Job Name</b>         |  |
| <b>Job Location</b>     |  |
| <b>P.O.#</b>            |  |
| <b>Engineer</b>         |  |
| <b>Contractor</b>       |  |
| <b>Wholesaler</b>       |  |
| <b>CopperPress® Rep</b> |  |


**Description:** CopperPress® Small Diameter Press Street Crossover is available in sizes ¾" x ½" and 1" x ¾" is made of lead-free dezincification resistant copper with an EPDM or HNBR o-ring. CopperPress® fittings are designed to be used with ASTM B88 Type K, L and M copper tubing in the hard-drawn condition.

**Features:**

- **Visual Indicator Press Ring (VIPR)** – facilitates immediate identification of un-pressed connections
- **Leak Before Press** – in addition to the VIPR, valve incorporates four path LBP technology, guaranteeing a visual indication if not pressed
- **Permanent Application Marking** – imprinted on fitting body for quick H<sub>2</sub>O or gas application identification
- **Lead Free Construction** – fully compliant with current lead-free laws
- **Copper Ends** - protect against dezincification and stress corrosion cracking

**Operational Parameters:** Operating / Test Pressure = 300 psi / 600 psi, Temperature Range 0°F - 250°F

**Approvals:** NSF ANSI/CAN 61, UPC, cUPC, IPC, IAPMO PS-117, ICC-ES-PMG, ASME B16.51

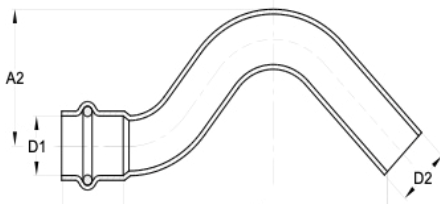

| Item Number | D1 (in) | L1 (in) | A1 (in) | A2 (in) |
|-------------|---------|---------|---------|---------|
| 23160       | ½"      | 4.61    | 3.80    | 1.10    |
| 23170       | ¾"      | 5.55    | 4.61    | 1.54    |