


Carbide Lined Guide Bush / Führungsbuchse / Canons

Guide Bush - Drawn Type

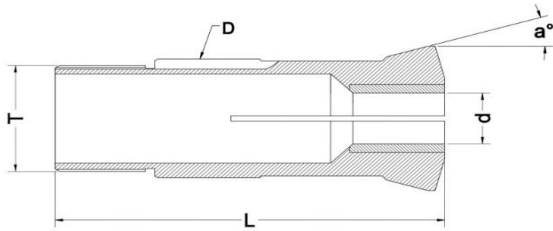


All Dimension are in mm - Unless Otherwise Specified

Capacity

Part Nr.	Sliding Dia	Total Length	Thread	Angle	Round	Hexagon	Square
	ΦD	L	T	α°			
7-02	7	30	M6x0.5	16°	3.5		
9-01	9	44	M8X0.5	16°	5	4	3
9-03	9	38.5	M8x0.75	16°	5	4	3
9-06	9	51	M8x0.8	30°	5	4	3
9-09	9	44	M8x0.75	16°	5	4	3
10-03	10	58	M10x0.75	12°	5.5	4	3
11-02	11	53	M10x0.75	16°	7	5	4
11-09	11	53	M10x1	16°	7	5	4
11-10	11	57	M10x0.75	16°	7	5	4
11-11	11	52.4	M10x0.75	16°	7	5	4
11-12	11	53	M10x0.80	16°	7	5	4
12-01	12	52	M12x1	30°	7	6	5
12-02	12	50	M10x0.75	16°	7	6	5
12-05	12	50	M10x0.75	16°	7	6	5
12-07	12	50	M12x1	30°	7.5	6	5
12-08	12	50	M10x0.5	30°	7	5	4
12-09	12	50	M12x1	30°	7.5	6	5
13-01	13	41.5	M12x0.75	15°	8	6	5
14-02	14	64	M13x0.75	16°	8.5	7	6
14-03	14	62	M14x1	15°30'	8.5	7	6
15-02	15	54	M14x1	16°	10	8	7

Carbide Lined Guide Bush / Führungsbuchse / Canons

Guide Bush - Drawn Type

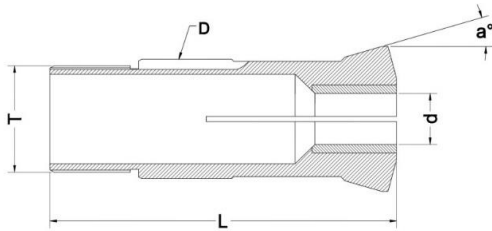


All Dimension are in mm - Unless Otherwise Specified

Capacity

Part Nr.	Sliding Dia	Total Length	Thread	Angle	Round	Hexagon	Square
	ΦD	L	T	α°			
15-03	15	54	M14x0.75	15°	8.5	7	6
16-01	16	50	M14x1	16°	10	8	7
16-03	16	60	M14x1	30°	10	8	7
16-06	16	55	M16x1	30°	10	8	7
16-07	16	63	M14x1	15°30'	10	8	7
16-10	16	58	M14x1	16°	10	8	7
16-12	16	59	M14x1	16°	10	8	7
16-15	16	59	M15x1	16°	11	9	8
16-16	16	58.5	M14x1	20°	10	8	7
16-18	16	63	M14x1	16°30'	10	8	7
18-01	18	59	M16x1	30°	12	10	8
18-02	18	60	M18x1	30°	13	10	9
18-03	18	60	M18x1	30°	13	10	9
18-06	18	76	M18X1	22°	13	10	9
18-08	18	60	M18X1	30°	12.5	10	8
20-01	20	55	M20x1	30°	14	11	9
20-06	20	55	M20x1	30°	13	11	9
20-07	20	58	M18x1	15°	13	11	9
21-03	21	57.5	M18x1	12°	14	11	9
22-01	22	68	M19x1	16°	14	12	10
22-03	22	70	M20x1	15°	15.5	13	11
22-04	22	68	M19X1	16°	15	12	10

Carbide Lined Guide Bush / Führungsbuchse / Canons

Guide Bush - Drawn Type

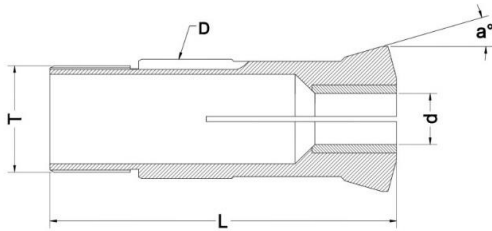


All Dimension are in mm - Unless Otherwise Specified

Capacity

Part Nr.	Sliding Dia	Total Length	Thread	Angle	Round	Hexagon	Square
	ΦD	L	T	α°			
22-08	22	68	M22x1	16°	16	13	11
23-01	23	72	M22x1	16°	16.5	14	11
24-03	24	61	M24x1	30°	16	13	11
26-02	26	77	M25x1	16°	20	17	14
26-04	26	71	M24X1.5	15°	18	15	13
27-03	27	57.5	M24x1	12°	18	15	12
28-02	28	81	M25x1	30°	20.5	17	14
28-04	28	82	M25x1	16°	20.5	17	14
28-05	28	82	M27x1	16°	22	18	15
30-01	30	70	M28x1	16°	20.5	17	14
30-02	30	85	M28x1	16°	20.5	17	14
30-04	30	59	M30x1	15°	22	19	16
30-05	30	59	M30x1	16°	22	19	16
30-06	30	68	M30x1	16°	22	19	16
30-07	30	70	M30x1	16°	22	19	16
30-08	30	57.5	M30X1	16°	22	19	16
32-02	32	71	M32x1	30°	23	19	16
32-03	32	74	M32x1	30°	24	21	17
33-01	33	70	M30x1	16°	26	22	18
34-02	34	87.5	M34x1	10°	27.5	23	19
34-03	34	87.5	M34X1	10°	27.5	23	19

Carbide Lined Guide Bush / Führungsbuchse / Canons

Guide Bush - Drawn Type

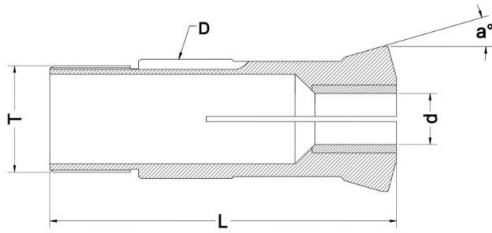

All Dimension are in mm - Unless Otherwise Specified

Capacity

Part Nr.	Sliding Dia	Total Length	Thread	Angle	Round	Hexagon	Square
	ΦD	L	T	α°			
36-02	36	89.5	M36x1	13°	25	21	18
40-03	40	72	M36x1	30°	29	25	21
40-05	40	72	M40x1	30°	30	25	21
41-01	41	54	M38x1	10°	32	27	22
41-02	41	82	M38x1	10°	32	27	22
41-03	41	82	M38X1	10°	32	27	22
41-04	41	54	M38X1	10°	30	26	21
42-01	42	82	M40x1	16°	33	28	23
42-02	42	82	M40x1	20°30'	33	28	23
42-04	42	82	M40x1	20°	33	28	23
44-01	44	87	M40x1	20°	33	28	23
45-01	45	82	M42x1	16°	36	30	25
46-01	46	92	M45x1	16°	38	32	26
46-02	46	82	M45x1	16°	38	32	26
48-02	48	81	M48x1.25	30°	38	33	27
48-04	48	82	M46x1	16°	38	33	27
48-06	48	81	M46x1	10°	38	33	27
48-08	48	82	M46X1	16°	38	33	27
50-02	50	82	M49x1	19°	42	36	29
52-01	52	99	M48x1.5 LH	10°	40	34	28
52-02	52	95	M50x1	16°	43	37	30