



JOINT FLASHING

for the installation of lap board siding

PRODUCT DESCRIPTION

The Bear Skin is a no-caulk, joint flashing for lap board siding that aids in preventing moisture from penetrating the butt joint.

Material

The Bear Skin is a flexible 6 x 12 inch sheet of proprietary cross linked, 7-layer, plastic film with a thickness of 6 mil (0.15 mm). After application, the tensile strength of the sheet gets stronger with time. On the back side is a 1.5 inch strip of adhesive for easy and repositionable application.

Benefits

Moisture Impermeable Material - The perm rating of the Bear Skin is .0016 perms.*

UV Protected - The Bear Skin provides a 50 year UV rating.*

Convenient Belt Clip - A clip is built into the backer of the Bear Skin to attach to your belt or tool pouch.



Fast Application - Each sheet is pre-cut with a stick-it adhesive for fast and repositionable installation.

Simple Application - No extra or specialty tools are required to install the Bear Skin.

Construction-site Ready - The self-stick adhesive on the back of the Bear Skin can be applied in all temperatures and weather conditions.

Specifically Created for Joint Flashing - The Bear Skin is made specifically to be the best solution to help prevent moisture from penetrating the butt joint.

*ASTM 3rd party testing results.

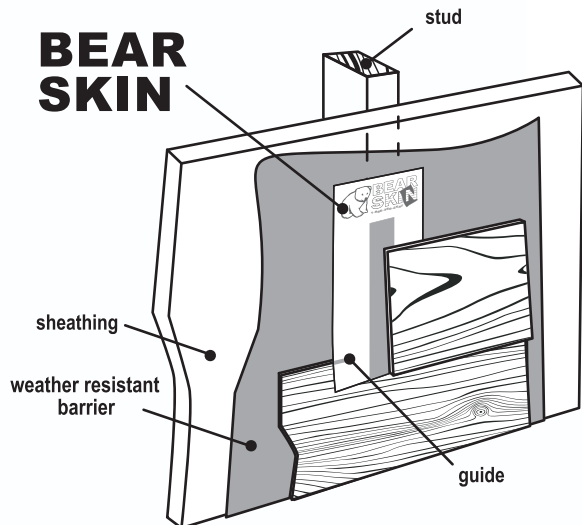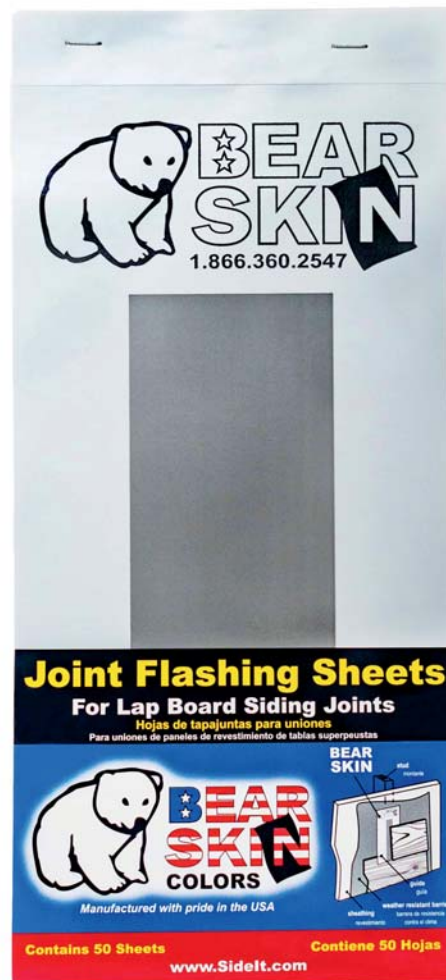

PHYSICAL PROPERTIES

PROPERTIES	RESULT
Color	Gray, Dark Brown, Tan
Sheets per pad	50 sheets
Weight	Pad: 1.1 lbs
Size	6" x 12" sheet on a 6" x 13" pad
Packaging	Single pad, 20 count box, 80 count case, 320 count half pallet, 640 count pallet
Thickness	6 mil (0.15mm)

©2020 v20.1

sold by, a wholesale subsidiary:

Bear Cub Industries, LLC

PO Box 291

Harbor Springs, MI 49740

866-360-2547

www.Sidelt.com