Say Goodbye To Back Pain And Hello To Tower Docks

Designer Series

15 - TV 12 - ---



On the Water

Designs



www.OnTheWaterDesigns.com

Is it getting difficult to find help each season when it is time to put your dock in and out? A Tower Dock by On the Water Designs can be lifted & lowered by yourself or with a single helper. Enjoy your dock on your schedule!

Designer Series

total the second second

Tower Docks are most suitable in water less than 8' deep and where fluctuation is minimal when a boat is tied to it. Muddy bottoms are not a problem but need to be managed properly to ensure easy removal. Tower Dock solutions inlude a strong mounting point at shore as well as a solid winch point that holds the dock over the winter.

All tower components are hidden below the decking for the summer.




All Tower Docks Include:

- ✓ Hidden Tower Design
- ✓ 8' Towers include HD Tower Upgrade
- ✓ All Rigging Between Tower & Dock
- ✓ Foot Pads & Pole Caps
- ✓ Reinforced Frame & Connection Points
- ✓ 10 Year Welded Frame Warranty

		No	Micro Pro	Western	Endeck /		
Size		Decking	PT	Red Cedar	Thruflow		
W L							
	20'	\$3,875	\$5,000	\$5,800	\$7,150		
		19-827	19-101	19-695	19-252		
	30'	6,000	7,500	8,700	10,550		
4'		19-849	19-841	19-174	19-352		
	40'	7,000	9,650	11,200	13,700		
		19-212	19-735	19-446	19-606		
	50'	9,125	12,250	14,250	17,250		
		19-629	19-971	19-669	19-379		
	20'	4,750	6,150	7,100	8,050		
	20	19-396	19-736	19-419	19-218		
6'	30'	7,000	8,950	10,350	11,750		
		19-674	19-808	19-957	19-521		
	40' 50'	7,850	12,250	14,200	16,350		
		19-973	19-842	19-256	19-786		
		11,000	15,200	17,550	20,500		
	50	19-463	19-601	19-538	19-309		
	20'	6,200	7,950	9,250	11,400		
	20	19-815	19-220	19-151	19-944		
	30'	8,450	11,450	13,300	16,100		
8'	- 50	19-250	19-749	19-474	19-246		
0	40'	10,700	14,650	17,000	21,000		
		19-561	19-754	19-662	19-157		
	50'	13,300	19,700	22,750	28,400		
50		19-359	19-465	19-460	19-775		
10' x 15' End Patio		3,500	6,000	7,100	8,350		
10 x 13 1		19-127	19-128	19-129	19-130		

	3'	\$625	\$700	\$700	\$900		
	3	17-665	17-128	17-292	17-397		
Corner	4'	675	800	800	1,025		
Walkway	4	17-713	17-293	17-852	17-474		
	5'	750	900	900	1,150		
	5	17-131	17-605	17-666	17-811		

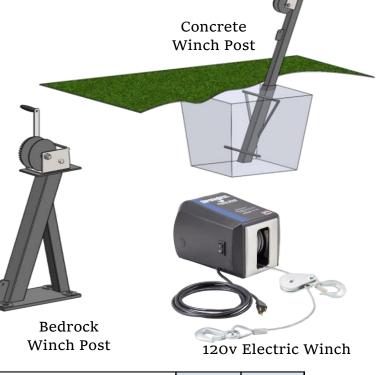

Winch	\$ 550.00	\$ 950.00	
	Manual	120V AC	
	44-387	44-298	
Winch Post	\$ 295.00	\$ 400.00	
	Bedrock	Concrete	
	45-413	45-698	
Winch Cable Pkg	\$ 300.00		-
	50'		
	16-114		
Winter Anchor Cable Pkg	\$ 125.00	\$ 145.00	\$ 165.00
	40'	60'	80'
	16-464	16-751	16-867

Delivery & Installation is available through a professional 3rd party installation crew. Delivery is \$150/HR one way. Installation is generally 10% - 13% and may change based on specific requirements. All prices subject to change without notice. All measurements are approximate

Designer Series



ower bock opt									
Soft Bottom	Sinking past your ankles? Use Large Feet	\$	40.00	\$	15.50				
Solution	Sinking to your shins? Use Patio Stones	L	arge Foot	Patio Stone					
			46-390		89-685				
Hidden Leg	Dock Legs stay hidden below your decking for a	\$	75.00	\$	115.00	\$	155.00	\$	190.00
Upgrade	clean appearance. Pole adjustment is limited to		20'		30'		40'		50'
	8"		16-556		16-247		16-677		16-190
Skirting (/ft)	Deck board running below dock frame adds an	\$	6.00	\$	8.50	\$	10.00	\$	17.00
	attractive natural finish and hides the gap	Br	ackets Only		PT		Cedar		PVC
	between the dock and water		16-540		16-541		16-542		16-543
Anti-Sway Bar	Telescopic bar runs diagonally between two legs.	\$	105.00	\$	115.00	\$	125.00	\$	135.00
	Optional on 6' legs & recommended with 8' legs	4'		6'		8'		10'	
			46-284		46-270		46-852		46-984
Aluminum Pole	1-1/2" Sched 40 marine grade aluminum pole.	\$	45.00	\$	67.50	\$	90.00	\$	250.00
	Anti-sway bars recommended where 8' poles are		4'		6'		8'		24'
	used		46-982		46-928		46-392		46-579
Step for Tower	Add built-in steps to a tower dock to start the	\$	1,500.00	\$	1,900.00	\$	2,500.00		
Dock	dock higher up on shore but maintain a lower	1	Step (7.5")	2	Step (15")	3	Step (22.5")		
	freeboard		16-722		16-763		16-764		
Accessory	HD aluminum bracket welded below decking to	\$	100.00	\$	100.00				
Reinforcement	reinforce cleats & mooring whips		Cleat		Whip				
		46-996 46-997			46-997				No



Bedrock Reinforced Dock frame mounted to bedrock with 1" threaded rod (included) 4' x 4' \$ 925 \$ 1,150 \$ 1,250 \$ 1,550 16-603 16-653 16-654 16-655 16-605 16-605 16-605 16-605 16-605 16-605 16-605 16-605 16-605 16-605 16-605 16-705	Share Distforms		Cleat 46-996	Whip 46-997		No Decking		Micro Pro PT		Western Red Cedar		PVC Endeck / Thruflow		
Bedrock Reinforced Dock frame mounted to bedrock with 1" threaded rod (included) $4' \times 4'$ $16-603$ $16-654$ $16-655$ $16-108$ $1''''''''''''''''''''''''''''''''''''$	Shore Platf	orms				ć	Ć 025		ć 1.150		ć 1.250			
Bedrock Reinforced Dock frame mounted to bedrock with 1" threaded rod (included) $a^{-1} \times a^{-1}$ $a^{-1} \times a^{-1} \times a^{$					4' x 4'								Ş	
Bedrock mounted to bedrock with 1" threaded rod (included) 6' x 4' 16-532 16-826 16-827 16-718 1" threaded rod (included) 8' x 4' 1,200 1,550 1,800 2,350 8' x 4' 1,200 1,550 1,800 2,350 8' x 4' 1,225 1,450 16-827 16-833 A 1,225 1,450 1,600 1,850 Clay 6' x 4' 1,225 1,450 1,600 1,850 (include) driven into soil. 6' x 4' 1,350 1,700 1,900 2,350 Shore Attachments 6''x 4' 1,696 16-571 16-572 16-496 Shore angle on uneven bedrock. 16-198 16-199 16-579 16-579 Shore angle on uneven bedrock. 16-681 16-904 16-498 16-585 Shore angle on uneven bedrock. 16-621 16-904 16-515 16-525 Shore angle on uneven bedrock. 16-222 16-74 16-535 16-525 Shore angle on uneven bedrock. 16-621 16-904 16-498 16-525 <		Reinf	orced Dock f				_							
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Bedrock	mour	nted to bedro	ock with	6' x 4'	1,050		_	1,400			,		,
Sand & Clay 8' x 4' 1,200 1,550 1,800 2,350 Sand & Clay Reinforced dock frame with 6' steel legs (included) driven into soil. 4' x 4' 1,225 1,450 1,600 1,850 Shore Attachments 6' x 4' 1,350 1,700 1,600 2,350 Shore Beam 6"x6" PT Beam. Used as an adaptor for the shore angle on uneven bedrock. 1	Bedrock mounted to bedrock with 1" threaded rod (included) 6' x 4' 16-532 16-826 16-827 1" threaded rod (included) 8' x 4' 1,200 1,550 1,800 8' x 4' 16-517 16-759 16-760 8' x 4' 16-517 16-759 16-700 8' x 4' 1,225 1,450 1,600 16-497 16-204 16-205 16-205 8' x 4' 1,350 1,700 1,900 6' x 4' 1,350 1,700 1,900 6' x 4' 16-966 16-571 16-572 8' x 4' 1,500 1,850 2,100 8' x 4' 1,500 1,850 2,100 8' x 4' 16-154 16-198 16-199 Shore Attachments 4' 6' 8' 4' 6' 8' 4' 6' 8'	1" th	readed rod (i	ncluded)			16-532		16-	826		16-827		16-718
Sand & Clay Reinforced dock frame with 6' steel legs (included) driven into soil. $4' \times 4'$ $1,225$ $1,450$ $1,600$ $1,850$ $6' \times 4'$ $1,6-497$ $16-204$ $16-205$ $16-139$ $6' \times 4'$ $1,350$ $1,700$ $1,900$ $2,350$ $6' \times 4'$ $16-966$ $16-571$ $16-572$ $16-496$ $8' \times 4'$ $1,500$ $1,850$ $2,100$ $2,650$ $8' \times 4'$ $16-154$ $16-198$ $16-199$ $16-579$ Shore Attachments $6''x6''$ PT Beam. Used as an adaptor for the shore angle on uneven bedrock. $16-681$ $16-94$ $16-94$ $16-98$ $16-585$ Shore Angle $4'' \times 4''$ Aluminum Angle. 465 510 585 645 Shore Plate $4'' \times 1/4''$ Aluminum Plate. $16-404$			2,350											
Sand & Clay Reinforced dock frame with 6' steel legs (included) driven into soil. $4' \times 4'$ $16-497$ $16-204$ $16-205$ $16-139$ 6' x 4' $1,350$ $1,700$ $1,900$ $2,350$ (included) driven into soil. $6' \times 4'$ $16-966$ $16-571$ $16-572$ $16-496$ 8' x 4' $16-966$ $16-571$ $16-572$ $16-496$ 8' x 4' $16-966$ $16-571$ $16-572$ $16-496$ Shore Attachments $8' x 4'$ $16-966$ $16-97$ $16-99$ $16-579$ Shore Beam $6''x6''$ PT Beam. Used as an adaptor for the shore angle on un=ven bedrock. $16-94$ $16-94$ $16-98$ $16-98$ $16-579$ Shore Angle $4'' x 4''$ Aluminum Angle. 465 510 585 645 Shore Angle $4'' x 1/4''$ Aluminum Plate. 330 360 420 425 Shore Angle $4'' x 2-1/2'''$ Aluminum Channel. 435 510 690 765 Shore Angle $4'' x 6'''$ Aluminum Angle $16-304$ $16-304$ $16-304$ 1					0 X 4		16-517	'	16-	759		16-760		16-833
Sand & Clay Reinforced dock frame with 6' steel legs (included) driven into soil. $4' \times 4'$ $16-497$ $16-204$ $16-205$ $16-139$ $6' \times 4'$ $1,350$ $1,700$ $1,900$ $2,350$ $(included)$ driven into soil. $6' \times 4'$ $16-966$ $16-571$ $16-572$ $16-496$ $8' \times 4'$ $16-966$ $16-571$ $16-592$ $16-579$ Shore Attachments $6'''x6''' PT Beam. Used as an adaptor for the shore angle on uneven bedrock. 16-194 16-949 16-593 Shore Angle 4''' \times 4''' Aluminum Angle. 465 510 585 6455 Shore Angle 4''' \times 1/4''' Aluminum Plate. 16-204 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404 16-404$						1.225		5	1 450			1.600		1,850
Sand & Clay Reinforced dock frame with 6' steel legs (included) driven into soil. 6' x 4' 1,350 1,700 1,900 2,350 B' x 4' 16-966 16-571 16-572 16-496 B' x 4' 1,500 1,850 2,100 2,650 B' x 4' 16-154 16-198 16-199 16-579 Shore Attachments If a stress of the shore angle on uneven bedrock. Shore Beam 6''x6'' PT Beam. Used as an adaptor for the shore angle on uneven bedrock. 16-681 16-94 16-98 16-585 Shore Angle 4'' x 4'' Aluminum Angle. 465 510 58 645 Shore Angle 4'' x 1/4'' Aluminum Plate. 16-404 16-4					4' x 4'	,		_	,		,			,
Clay with 6' steel legs (included) driven into soil. 6' x 4' 1/500 1/	Sand &	Reinf	Reinforced dock frame					_						
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $		with	6' steel legs		6' x 4'			_	,		,			
8 x 4 16-154 16-198 16-199 16-579 Shore Attachments 4' 6' 8' 10' Shore Beam 6''x6'' PT Beam. Used as an adaptor for the shore angle on uneven bedrock. 345 \$ 400 \$ 450 \$ 450 Shore Angle 4'' x 4'' Aluminum Angle. 465 510 585 645 Shore Plate 4'' x 1/4'' Aluminum Plate. 330 360 420 425 Shore Channel 4'' x 2-1/2'' Aluminum Channel. 435 510 690 765 Mount to the face of an uneven surface 16-304 16-306 16-308 16-308 Shore Channel 4'' x 6'' Aluminum Angle. 435 510 690 765 Mount to the face of an uneven surface 16-304 16-306 16-308 16-301 Concrete Angle 4'' x 6'' Aluminum Angle. 565 725 850 1,025	Ciay	(inclu	ded) driven	into soil.				_						
Shore Attachments 4' 6' 8' 10' Shore Beam 6"x6" PT Beam. Used as an adaptor for the shore angle on uneven bedrock. \$ 345 \$ 400 \$ 450 \$ 450 Shore Angle 4" x 4" Aluminum Angle. 16-94 16-498 16-585 Shore Plate Mount to shore beam or wood deck 16-222 16-674 16-515 16-293 Shore Plate 4" x 1/4" Aluminum Plate. 330 360 420 425 Mount to the face of a flat surface 16-404 16-408 16-408 16-410 Shore Channel 4" x 2-1/2" Aluminum Channel. 435 510 690 765 Mount to the face of an uneven surface 16-304 16-306 16-308 16-310 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025				8' x 4'			_			,				
Shore Beam 6"x6" PT Beam. Used as an adaptor for the shore angle on uneven bedrock. \$ 345 \$ 400 \$ 450 \$ 450 Shore Angle 4" x 4" Aluminum Angle. 16-681 16-904 16-498 16-585 Shore Angle 4" x 4" Aluminum Angle. 465 510 585 645 Shore Plate 4" x 1/4" Aluminum Plate. 330 360 420 425 Shore Channel 4" x 2-1/2" Aluminum Channel. 435 510 690 765 Mount to the face of an uneven surface 16-304 16-304 16-308 16-308 Shore Channel 4" x 2-1/2" Aluminum Angle. 435 510 690 765 Mount to the face of an uneven surface 16-304 16-308 16-308 16-308 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025							16-154	ļ.	16-198		16-199		16-579	
Shore Beam shore angle on uneven bedrock. 16-681 16-904 16-498 16-585 Shore Angle 4" x 4" Aluminum Angle. Mount to shore beam or wood deck 465 510 585 645 Shore Plate 4" x 1/4" Aluminum Plate. Mount to the face of a flat surface 16-404 16-406 16-408 16-408 Shore Channel 4" x 2-1/2" Aluminum Channel. Mount to the face of an uneven surface 16-304 16-306 16-308 16-310 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025	Shore Atta	chmen	ts						4'		6'	8	3'	10'
shore angle on uneven bedrock. 16-681 16-904 16-498 16-585 Shore Angle 4" x 4" Aluminum Angle. Mount to shore beam or wood deck 465 510 585 645 Shore Plate 4" x 1/4" Aluminum Plate. Mount to the face of a flat surface 330 360 420 425 Shore Channel 4" x 2-1/2" Aluminum Channel. Mount to the face of an uneven surface 16-304 16-306 16-308 16-308 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025	Shore Be	am			•	for the		\$ 34	45		400 \$ 45)	
Shore Angle Mount to shore beam or wood deck 16-22 16-674 16-515 16-293 Shore Plate 4" x 1/4" Aluminum Plate. Mount to the face of a flat surface 330 360 420 425 Shore Plate 4" x 2-1/2" Aluminum Channel. Mount to the face of an uneven surface 16-404 16-406 16-408 16-409 Shore Channel 4" x 2-1/2" Aluminum Channel. Mount to the face of an uneven surface 16-304 16-306 16-308 16-301 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025				-					_				_	
Shore Plate 4" x 1/4" Aluminum Plate. Mount to the face of a flat surface 330 360 420 425 Shore Channel 4" x 2-1/2" Aluminum Channel. Mount to the face of an uneven surface 16-404 16-406 16-408 16-409 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025	Shore An	gle			0		-						_	
Shore Plate Mount to the face of a flat surface 16-404 16-406 16-408 16-409 Shore Channel 4" x 2-1/2" Aluminum Channel. 435 510 690 765 Mount to the face of an uneven surface 16-304 16-306 16-308 16-308 16-309 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025	Mount to shore													
Shore Channel 4" x 2-1/2" Aluminum Channel. Mount to the face of an uneven surface 435 510 690 765 Mount to the face of an uneven surface 16-304 16-306 16-308 16-310 Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025	Shore Plate				-						_			
Shore ChannelMount to the face of an uneven surface16-30416-30616-30816-310Concrete Angle4' x 6" Aluminum Angle5657258501,025	Shore Channel 4" x							-						
Concrete Angle 4' x 6" Aluminum Angle 565 725 850 1,025			1	•										
											_			
	Concrete	Angle			•		-							
* Note: Concrete Pour Available Separately						* N	lote: (_	



Concrete Angle on New Concrete



Shore Beam & Angle



Shore Platform (Sand & Clay)

www.OnTheWaterDesigns.com

