



## Ultra-I Automatic Controller

Expandable Stations

**The Yardney Ultra-I automatic controller** is a simple and easy-to-use backwash filter controller. The filter control system design features user selection flexibility of power source input, number of station outputs, AC/DC or latching solenoids. The controller incorporates elapsed time monitoring as well as pressure differential activation with filter system backwashing activity reported through the backwash cycle counter program. The Ultra is available with up to sixteen stations.



### Application

Initiates backwashing on all applicable Yardney Water Filtration Systems including Sand Media, Multi-Media, Granular Activated Carbon and Maxi-Flush systems

### Advantages

- Four-station base unit is expandable to sixteen stations using 4-station plug-in expansion modules
- Operates up to 2 valves per station plus a master valve
- Selectable input power: 110V AC, or 12V DC (Optional 220V AC)
- Flush activation based on elapsed time and/or pressure differential
- Programmable filter backwash frequency, duration and delay
- Backwash cycle counter
- Manual start with station advance and stop
- Lockable rain-tight outdoor enclosure
- Three year limited warranty

Industrial, Commercial & Municipal

## Ultra-I Controllers


### Specifications

LED display provides the following status information:

- Elapsed time differential
- Pressure differential activation
- Backwash cycle counter
- Filter operating status between backwashes
- Active station number during backwash cycle
- Dwell status (active/inactive)

The backwash cycle may be manually initiated, station advanced or stopped as needed.

ELECTRICAL SPECIFICATIONS	
Station Capacity	
Base Unit	1-4 Outputs
Plug-in Modules	4 Outputs each / 16 maximum
Power Source	
Standard	Selectable 120V AC 60 Hz or 12V DC
Optional	220V AC 50 Hz
Display Power Consumption	46 milliamps when the display function switch is depressed
Outputs	
AC Power	Selectable 24V AC
DC Power	Selectable 12V DC continuous or pulsed. Maximum 3 amps continuous output, 20 milliamps pulsed output

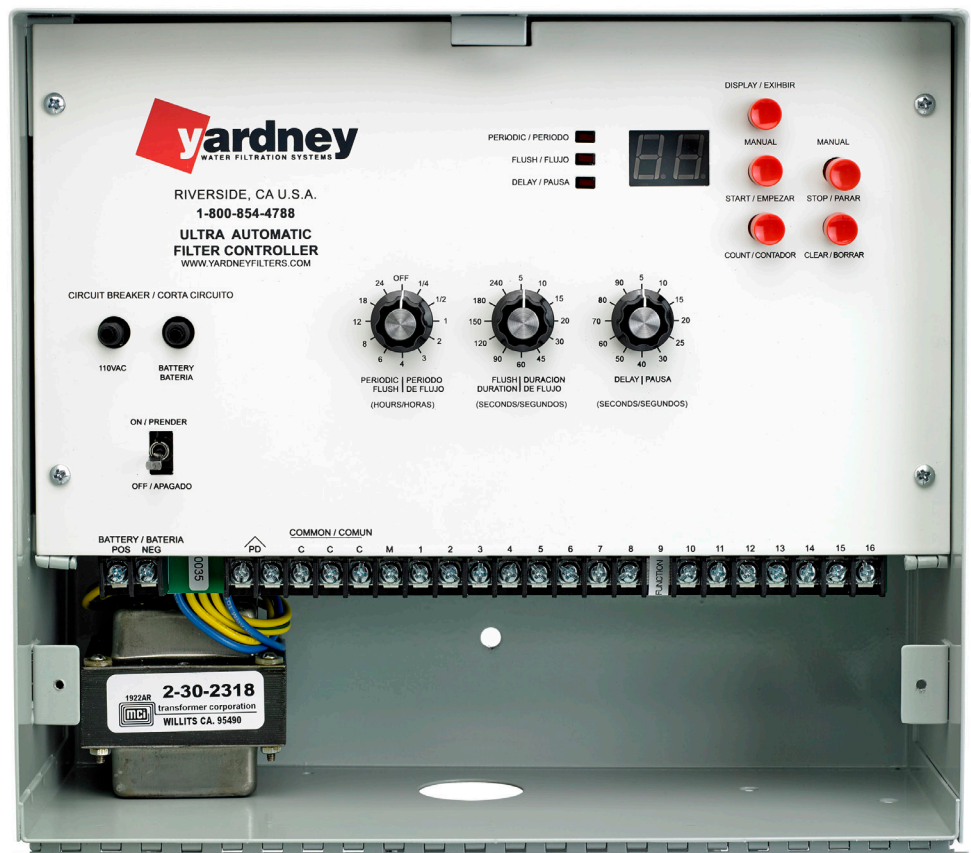

Made in USA

Phone: 951.656.6716  
Toll-Free: 800.854.4788  
Fax: 951.656.3867  
info@yardneyfilters.com



www.yardneyfilters.com