

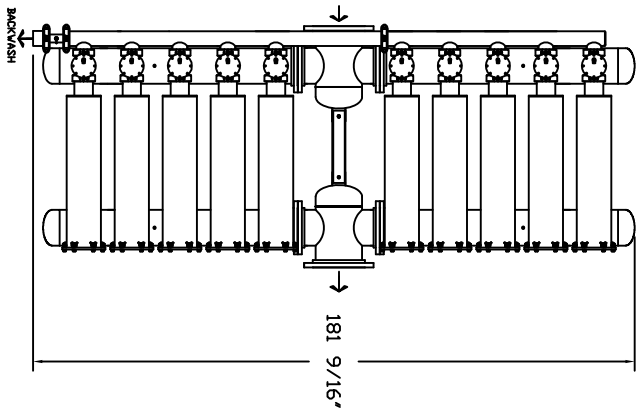



GOLF/TURF MAXI-FLUSH 10-10A CENTERFEED

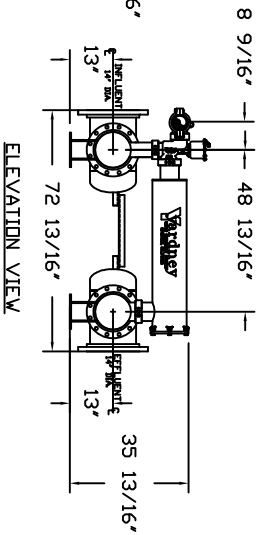

- NOTES:**
1. DESIGN FLOW RATE: 5000 GPM (MAX.)
 2. OPERATING PRESSURE: 150 PSI (MAX.)
 3. CARTRIDGE:
42" MIN. CLEARANCE REQUIRED FOR CARTRIDGE REPLACEMENT.

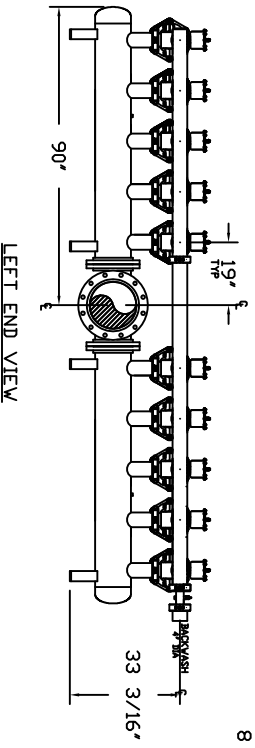

PLAN VIEW

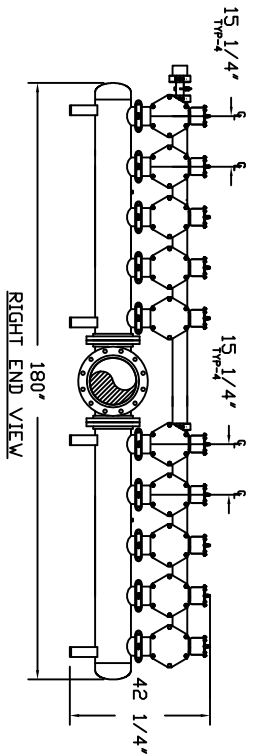

RIGHT END VIEW

THIS DRAWING, INCLUDING THE INFORMATION IS CONTAINED HEREIN, IS THE PROPERTY OF YARDNEY WATER MANAGEMENT, INC. IT IS SUBMITTED ONLY IN CONNECTION WITH THE INVESTIGATION TO WHICH IT PERTAINS AND MUST NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF YARDNEY WATER MANAGEMENT. THE DRAWING IS NOT TO BE USED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN PERMISSION OF YARDNEY WATER MANAGEMENT. SYSTEM 1924.

DATE	1-19-2001	BRWING NO.	908010010	REV.	B
BY	JMW	LOCATION	SYSTEM# S/CENTERFEED	SHEET 1 OF 1	
DATE	10-12-04	BY	DTD	REV. B	
REVISION	A	DESCRIPTION	ADDED 1/2" WELD TABS		
NO.	NDL	DESCRIPTION	CARTRIDGE 40 TO 42 PER CART. IN SEAL		

Yardney
WATER MANAGEMENT, INC.
MEMPHIS, TN 38117
MF S10-10A
SCREEN FILTER