


GULF/TURF MAXI—FLUSH 10—6A Inline


NUTES

- DESIGN FLOW RATE: 3000 GPM (MAX.)
- 2. OPERATING PRESSURE: 150 PSI (MAX.)
- 3. CARTRIDGE:
 42° MIN. CLEARANCE REQUIRED FOR CARTRIDGE REPLACEMENT.

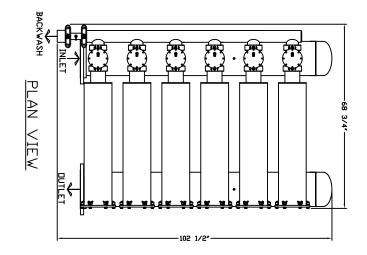

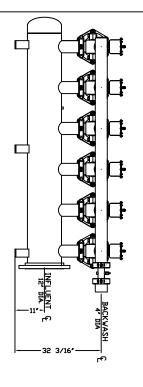



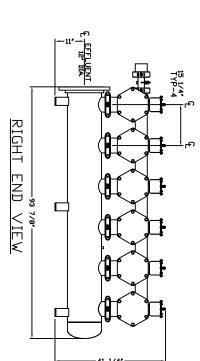

FLEVAIIU	
N VIEW	

LEFT END VIEW

_	_	_	_	_	_	
ĕ	>	В			¥	HUSANA
REVISIONS	CARTRIDGE 40 TO 42 PER CART. IN SEAL	ADDED 1/2' WELD TABS			MANAGEMENT SYSTEMS, 1994.	THIS DRAVING, INCLUDING THE INFORMATION IT CONTAINS, IS CON- TIDENTIAL, PROPRIETARY, AND IS THE PROPERTY OF YARDINE VATER MANAGEMENT, INC. IT IS SUBMITTED ONLY IN CONNECTION VITH THE TRANSACTION TO WHICH IT PERTAINS AND MUST NOT BE USED IN ANY OTHER MANACE DETRIBHTIAL TO THE INTERESTS OF WARNEY VATER MANAGEMENT. THE DRAVING IS NOT TO BE COPIE! MADMEY VATER MANAGEMENT. THE DRAVING IS NOT TO BE COPIE! MADMEY VATER MANAGEMENT. THE DRAVING IS NOT TO BE COPIE! MADMEY VATER MANAGEMENT OF THE MORE AND THE MANAGEMENT OF THE MANA
BY D	DTC 6	070 10		L		ST NOT PEREST
ATE	-04)-12				
APP	APP	APP				264 Z41
BY DATE APP USED DIN	DTC 6-04 APP SCALE	DTG 10-12 APP APPROVED BY	CHECKED BY	DRAWN BY: DTC 5-1-04	APPROVALS DATE	
SCALE	ı	SIZE		=	M	
SCALD DWG DRESYSTEMNMFSNGMFS SHEET 1 DF 1	MFS 10-6A REV		MT0 10 / A	APPROVALS DATE MAYI-FILISH SCREEN FILTER	Vardney	