
Ċ R T 10<u>-8A</u>


NOTES

- DESIGN FLOW RATE: 4000 GPM (MAX.)
- įν OPERATING PRESSURE: 150 PSI (MAX.)

3. CARTRIDGE:
42° MIN. CLEARANCE REQUIRED FOR
CARTRIDGE REPLACEMENT.




PLAN VIEW



-74 3/4"-

LEFT END VIEW

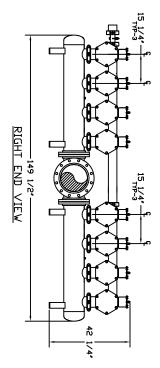

ND.	Þ	B ADDED 1/2' WELD TABS		THE PERSON	AN YAR		謡
REVISION	CART. IN SEAL		IS NOT T			THE TRANSACTION TO WHICH IT PERTAINS AND MICH ANY OTHER MANNER DETRIMENTAL TO THE	DRAVING, INCLUDING THE INFORMATION IT CONTINUES THE PROPERTY AND IS THE PROPERTY OF THE PROPER
ВΥ	DTC	H			O HE C	N CUNNECTION OUST NOT BE INTERESTS OF	Y OF YARDNEY
BY DATE	6-04	10-12			ATER	375 875	
SYSTE	LOCATION:	DTD 10-12 DRAWING ND: 908	1-19-2001		WMF NE NAW	USED DIV	CUSTOMER
SYSTEM\MFS\CENTERFEED		9080110008			MFS10-8A	WATER MANAGEMENT SYSTEMS TRIVERSTON, CALIFORNIA	√Wardnev
SHEET [OF]		æ. ₽			⊅	٠	◁