SM 3016-3A

NOTES:

1. FLOW RATE DESIGN: 170-250 GPM.

UPPER (INLET) MANIFOLD LAYOUT

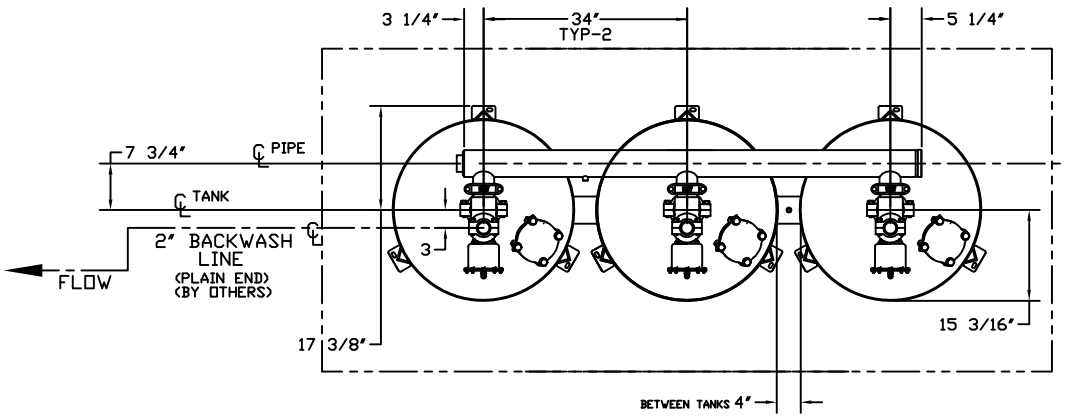

LOWER (OUTLET) MANIFOLD LAYOUT

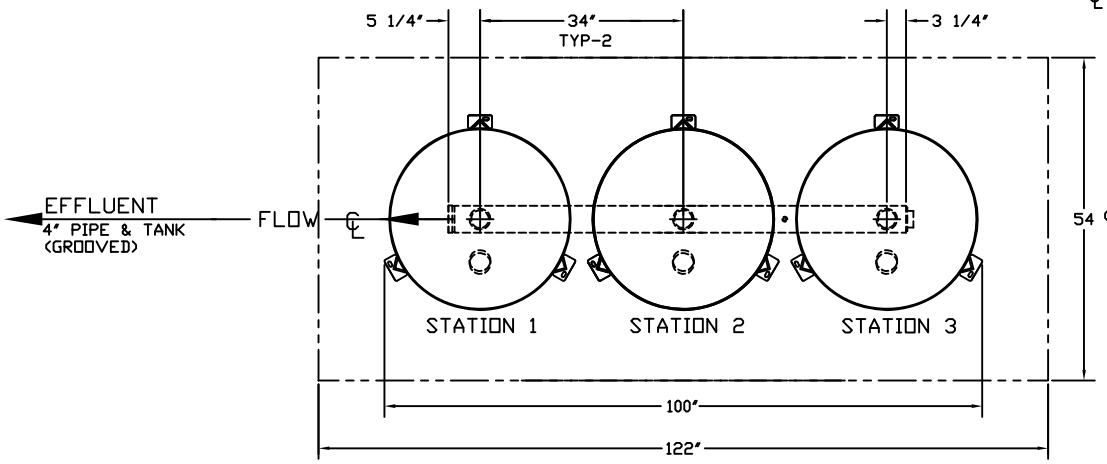

(RECOMMENDED PAD DIMENSION)

SECTION A-A

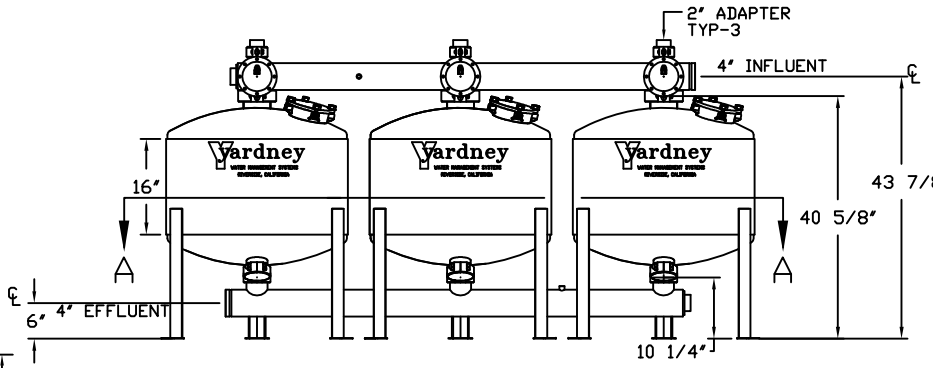

ELEVATION VIEW

THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS CONFIDENTIAL, PROPRIETARY AND IS THE PROPERTY OF YARDNEY WATER MANAGEMENT, INC. IT IS SUBMITTED ONLY IN CONNECTION WITH THE TRANSACTION TO WHICH IT PERTAINS AND MUST NOT BE USED IN ANY OTHER MANNER DETRIMENTAL TO THE INTERESTS OF YARDNEY WATER MANAGEMENT. THE DRAWING IS NOT TO BE COPIED AND MUST BE RETURNED UPON REQUEST.
COPYRIGHT YARDNEY WATER MANAGEMENT SYSTEMS, 1994

SYM	REVISIONS	BY	DATE	APP
C	WELD TABS ON MANWAY RINGS, ADDED NOTES.	DTC	11-12	APP
B	DRAWN SECTION VIEW TO NEW DESIGN MANWAY	DTC	9-08	APP
A	DRAWN TO SCALE	DTC	7-04	APP

DO NOT SCALE DWG.

Yardney WATER MANAGEMENT SYSTEMS RIVERSIDE, CALIFORNIA

APPROVALS	DATE
DRAWN BY: K.A.T.	3/18/8
CHECKED BY:	
APPROVED BY:	
ARCHITECTURAL SCALED	NONE
USED ON:	

FILTER SM 3016-3 END FEED LAYOUT

SIZE	DRAWING NO:	REV:
D	9000301603	C

SCALE: NONE | DWG DIR: SYSTEMS\AG (SM) | SHEET 1 OF 1